



SANYO Semiconductors

## DATA SHEET

Monolithic Linear IC

# LA4583M — Compact Cassette Stereo Recording and Playback System

## OVERVIEW

The LA4583M is a complete recording and playback system for compact cassette units. It incorporates microphone and tuner preamplifiers, and power amplifiers for both a low-impedance speaker and headphones. Mode switching is completely electronic, which greatly reduces switching noise.


The LA4583M features ALC circuitry to ensure optimum recording levels and on-chip supplies for external electret condenser microphones and bias oscillators.

The LA4583M operates from a 3 V supply and is available in 44-pin QIPs.

## FEATURES

- Electronically switched recording and playback modes
- Automatic power and recording mute when switching modes
- 16  $\Omega$  stereo headphone amplifier
- 4  $\Omega$  mono speaker amplifier
- Automatic level control in recording mode
- Preamplifiers for external microphones and tuner circuits
- 3 V supply
- 44-pin QIP


## Pin Assignment

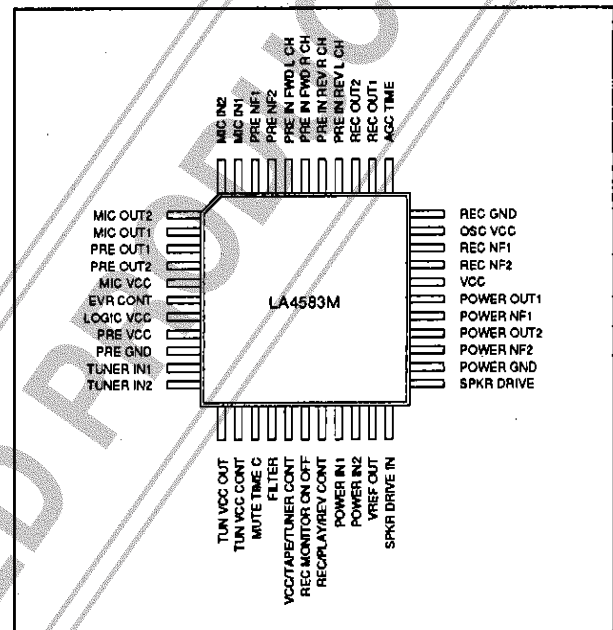

## PACKAGE DIMENSIONS

Unit: mm


3148-QIP44MA

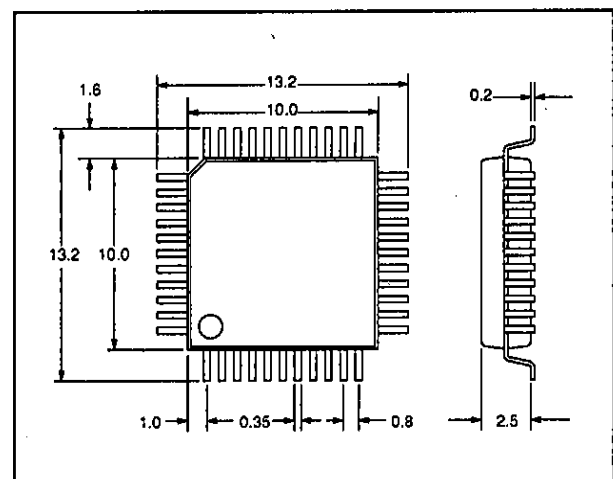

SANYO Electric Co., Ltd. Semiconductor Company







TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110-8534 JAPAN

## BLOCK DIAGRAM

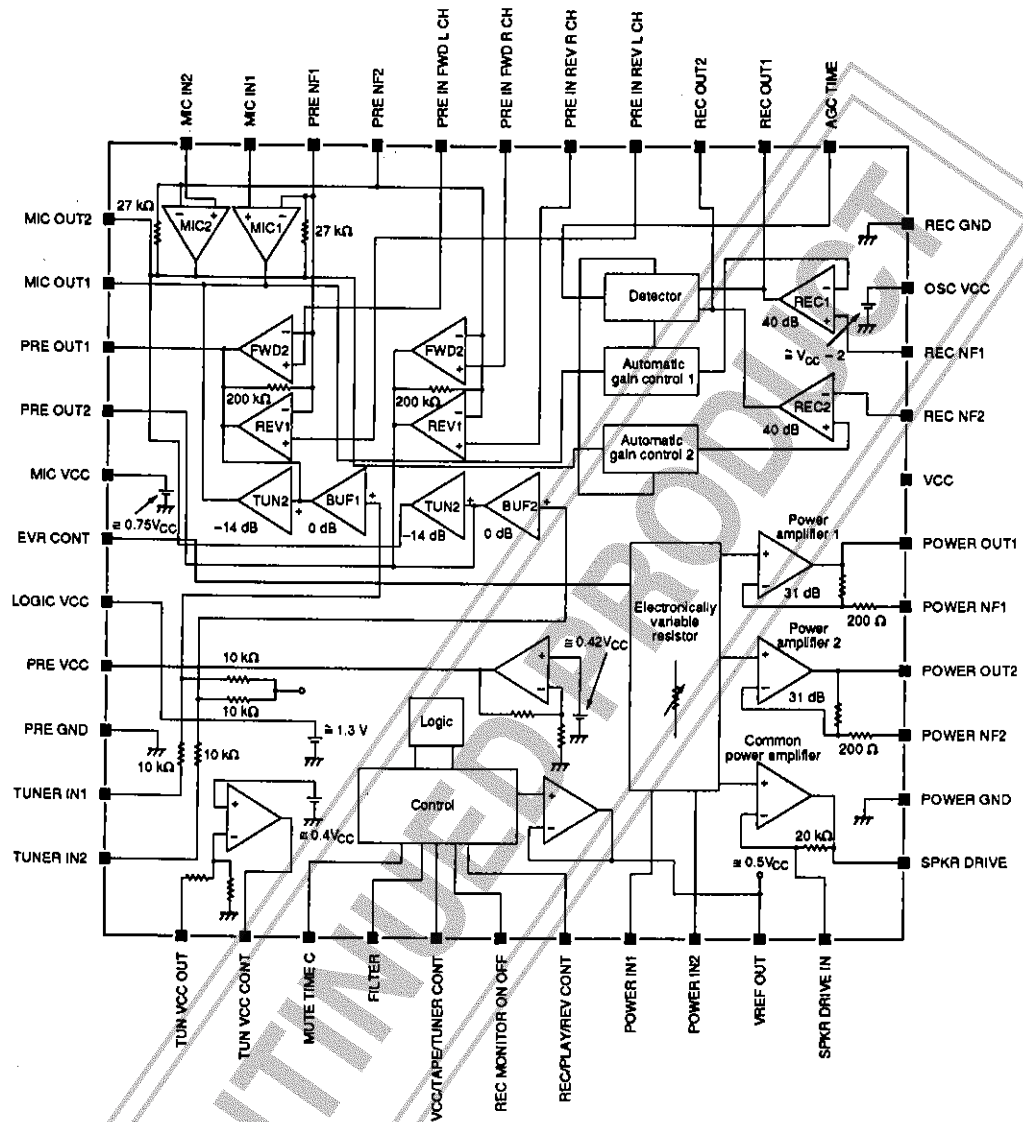

## PIN DESCRIPTION

| Number | Name         | Equivalent circuit | Description                                                                       |
|--------|--------------|--------------------|-----------------------------------------------------------------------------------|
| 1      | TUN VCC OUT  |                    | Tuner supply output. Output impedance is 20 kΩ. Nominal voltage is 2.5 V.         |
| 2      | TUN VCC CONT |                    | Tuner supply control output. Output impedance is 51 kΩ. Nominal voltage is 2.4 V. |
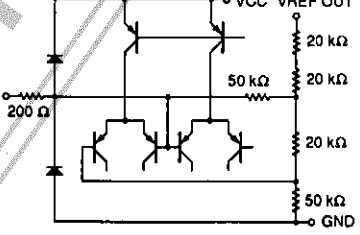
| Number | Name                | Equivalent circuit                                                                  | Description                                                                                                       |
|--------|---------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| 3      | MUTE TIME C         |    | Mute time control input. Nominal voltage range is 0.2 to 0.85 V.                                                  |
| 4      | FILTER              |    | Voltage reference external filter capacitor. Nominal voltage is 1.2 V.                                            |
| 5      | VCC/TAPE/TUNER CONT |   | Tape/tuner mode select input. Nominal voltage is 1.1 to 3.0 V.                                                    |
| 6      | REC MONITOR ON OFF  |  | Recording monitor enable input. Input impedance is 110 kΩ. Nominal voltage is 0 to 0.7 V.                         |
| 7      | REC/PLAY/REV CONT   |  | Recording/playback/reverse-playback mode select. Input impedance is 75 kΩ. Nominal voltage range is 0.1 to 1.5 V. |
| 8      | POWER IN1           |  | Channel 1 headphone amplifier input. Input impedance is 50 kΩ. Nominal voltage is 1.5 V.                          |
| 9      | POWER IN2           |                                                                                     | Channel 2 headphone amplifier input. Input impedance is 50 kΩ. Nominal voltage is 1.5 V.                          |

| Number | Name          | Equivalent circuit | Description                                                                         |
|--------|---------------|--------------------|-------------------------------------------------------------------------------------|
| 10     | VREF OUT      |                    | Voltage reference output. Nominal voltage is 1.5 V.                                 |
| 11     | SPKR DRIVE IN |                    | Common amplifier input. Input impedance is 5 k $\Omega$ . Nominal voltage is 1.5 V. |
| 12     | SPKR DRIVE    |                    | Common amplifier output. Nominal voltage is 1.5 V.                                  |
| 15     | POWER OUT2    |                    | Channel 2 headphone amplifier output. Nominal voltage is 1.5 V.                     |
| 17     | POWER OUT1    |                    | Channel 1 headphone amplifier output. Nominal voltage is 1.5 V.                     |
| 13     | POWER GND     |                    | Power amplifier ground                                                              |
| 14     | POWER NF2     |                    | Channel 2 headphone amplifier negative feedback input. Nominal voltage is 1.5 V.    |
| 16     | POWER NF1     |                    | Channel 1 headphone amplifier negative feedback input. Nominal voltage is 1.5 V.    |
| 18     | VCC           |                    | 5 V supply                                                                          |
| 19     | REC NF2       |                    | Channel 2 recording preamplifier negative feedback input. Nominal voltage is 1.5 V. |
| 20     | REC NF1       |                    | Channel 1 recording preamplifier negative feedback input. Nominal voltage is 1.5 V. |

| Number | Name           | Equivalent circuit | Description                                                                           |
|--------|----------------|--------------------|---------------------------------------------------------------------------------------|
| 21     | OSC VCC        |                    | External bias oscillator supply. Output impedance is 20 kΩ. Nominal voltage is 0.8 V. |
| 22     | REC GND        |                    | Recording amplifier ground                                                            |
| 23     | AGC TIME       |                    | AGC response control input. Nominal voltage range is 0.35 to 0.75 V.                  |
| 24     | REC OUT1       |                    | Channel 1 recording amplifier output. Nominal voltage is 1.5 V.                       |
| 25     | REC OUT2       |                    | Channel 2 recording amplifier output. Nominal voltage is 1.5 V.                       |
| 26     | PRE IN REV LCH |                    | Left-channel reverse playback preamplifier input. Nominal voltage is 1.5 V.           |
| 27     | PRE IN REV RCH |                    | Right-channel reverse playback preamplifier input. Nominal voltage is 1.5 V.          |
| 28     | PRE IN FWD RCH |                    | Left-channel normal playback preamplifier input. Nominal voltage is 1.5 V.            |
| 29     | PRE IN FWD LCH |                    | Right-channel normal playback preamplifier input. Nominal voltage is 1.5 V.           |
| 30     | PRE NF2        |                    | Channel 2 preamplifier negative feedback input. Nominal voltage is 1.5 V.             |
| 31     | PRE NF1        |                    | Channel 1 preamplifier negative feedback input. Nominal voltage is 1.5 V.             |

LA4583M

| Number | Name      | Equivalent circuit | Description                                                                                                        |
|--------|-----------|--------------------|--------------------------------------------------------------------------------------------------------------------|
| 32     | MIC IN1   |                    | Channel 1 microphone preamplifier input. Input impedance is 5 kΩ. Nominal voltage is 1.5 V.                        |
| 33     | MIC IN2   |                    | Channel 2 microphone preamplifier input. Input impedance is 5 kΩ. Nominal voltage is 1.5 V.                        |
| 34     | MIC OUT2  |                    | Channel 2 microphone preamplifier output. Nominal voltage is 1.5 V.                                                |
| 35     | MIC OUT1  |                    | Channel 1 microphone preamplifier output. Nominal voltage is 1.5 V.                                                |
| 36     | PRE OUT1  |                    | Channel 1 playback preamplifier output. Nominal voltage is 1.5 V.                                                  |
| 37     | PRE OUT2  |                    | Channel 2 playback preamplifier output. Nominal voltage is 1.5 V.                                                  |
| 38     | MIC VCC   |                    | External microphone supply. Output impedance is 18 kΩ. Nominal voltage is 2.3 V.                                   |
| 39     | EVR CONT  |                    | Electronic variable resistor (EVR) control voltage input. Input impedance is 16 kΩ. Nominal voltage is 0 to 1.3 V. |
| 40     | LOGIC VCC |                    | Bias supply for internal logic circuits. Nominal voltage is 1.3 V.                                                 |

| Number | Name      | Equivalent circuit | Description                                                                             |
|--------|-----------|--------------------|-----------------------------------------------------------------------------------------|
| 41     | PRE VCC   |                    | Bias supply for preamplifiers. Output impedance is 9.5 kΩ. Nominal voltage is 2.5 V.    |
| 42     | PRE GND   |                    | Ground                                                                                  |
| 43     | TUNER IN1 |                    | Channel 1 tuner preamplifier input. Input impedance is 20 kΩ. Nominal voltage is 1.5 V. |
| 44     | TUNER IN2 |                    | Channel 2 tuner preamplifier input. Input impedance is 20 kΩ. Nominal voltage is 1.5 V. |

### Note

Nominal voltages measured with  $V_{CC} = 3 \text{ V}$ .

## SPECIFICATIONS

### Absolute Maximum Ratings

| Parameter                   | Symbol    | Rating     | Unit |
|-----------------------------|-----------|------------|------|
| Supply voltage              | $V_{CC}$  | 4.5        | V    |
| Power dissipation           | $P_D$     | 1          | W    |
| Operating temperature range | $T_{opr}$ | -20 to 75  | °C   |
| Storage temperature range   | $T_{stg}$ | -40 to 125 | °C   |

## Recommended Operating Conditions

$$T_1 = 25^\circ\text{C}$$

| Parameter            | Symbol          | Rating     | Unit |
|----------------------|-----------------|------------|------|
| Supply voltage       | V <sub>CC</sub> | 3          | V    |
| Supply voltage range | V <sub>CC</sub> | 1.8 to 3.6 | V    |

## Electrical Characteristics

$V_{CC} = 3 \text{ V}$ ,  $T_s = 25 \text{ }^\circ\text{C}$ ,  $0 \text{ dB} = 1 \text{ V}$ ,  $f = 1 \text{ kHz}$ ,  $R_L = 10 \text{ k}\Omega$  (preamplifiers),  $R_L = 16 \text{ }\Omega$  (headphone amplifiers),  $R_L = 4 \text{ }\Omega$  (common amplifier)

| Parameter                | Symbol           | Condition             | Rating |     |     | Unit |
|--------------------------|------------------|-----------------------|--------|-----|-----|------|
|                          |                  |                       | min    | typ | max |      |
| Quiescent supply current | I <sub>cco</sub> | Forward playback mode | 14     | 22  | 40  | mA   |
|                          |                  | Recording mode        | 14     | 28  | 45  |      |

## Playback preamplifiers

| Parameter                 | Symbol       | Condition                                    | Rating |      |     | Unit    |
|---------------------------|--------------|----------------------------------------------|--------|------|-----|---------|
|                           |              |                                              | min    | typ  | max |         |
| Open-loop voltage gain    | $V_{GHO}$    |                                              | 65     | 80   | —   | dB      |
| Closed-loop voltage gain  | $V_{GH}$     |                                              | 36     | 38   | 40  | dB      |
| Total harmonic distortion | $THD_H$      | $V_0 = -5$ dBV                               | —      | 0.05 | 1.0 | %       |
| Input conversion noise    | $V_{NIH}$    | $R_0 = 2.2$ k $\Omega$ ,<br>DIN AUDIO filter | —      | 1    | 2   | $\mu$ V |
| Maximum output voltage    | $V_{OH}$ max | THD = 5%                                     | 0.3    | 0.65 | —   | V       |

## Tuner preamplifiers

| Parameter                 | Symbol       | Condition                                   | Rating |     |     | Unit    |
|---------------------------|--------------|---------------------------------------------|--------|-----|-----|---------|
|                           |              |                                             | min    | typ | max |         |
| Closed-loop voltage gain  | $V_{GR}$     |                                             | -8     | -6  | -4  | dB      |
| Total harmonic distortion | $THD_R$      | $V_0 = -15$ dBV                             | —      | 0.1 | 1.0 | %       |
| Maximum output voltage    | $V_{OR}$ max | THD = 5%                                    | 0.2    | 0.6 | —   | V       |
| Output noise voltage      | $V_{NOR}$    | $R_0 = 10$ k $\Omega$ ,<br>DIN AUDIO filter | —      | 10  | 30  | $\mu$ V |

## Microphone recording circuitry

| Parameter                 | Symbol     | Condition                                      | Rating |     |     | Unit |
|---------------------------|------------|------------------------------------------------|--------|-----|-----|------|
|                           |            |                                                | min    | typ | max |      |
| Closed-loop voltage gain  | $V_{GMR}$  |                                                | 77     | 80  | 83  | dB   |
| Total harmonic distortion | $THD_{MR}$ | $V_0 = 0.775$ V,<br>$C_{35} = C_{36} = 1.8$ nF | —      | 0.7 | 1.5 | %    |
| Maximum output voltage    | $V_{OMR}$  | THD = 5%, AGC is OFF.                          | 0.7    | 1.1 | —   | V    |
| Output noise voltage      | $V_{NOMR}$ | $R_0 = 2.2$ k $\Omega$ ,<br>DIN AUDIO filter   | —      | 15  | 30  | mV   |
| Channel balance           | $CB_{MR}$  |                                                | -2     | 0   | 2   | dB   |
| Interchannel crosstalk    | $CT_{MR}$  | $R_0 = 2.2$ k $\Omega$ ,<br>1 kHz TUNE filter  | 16     | 25  | —   | dB   |

## Tuner recording circuitry

| Parameter                 | Symbol        | Condition                                    | Rating |      |     | Unit |
|---------------------------|---------------|----------------------------------------------|--------|------|-----|------|
|                           |               |                                              | min    | typ  | max |      |
| Closed-loop voltage gain  | $V_{GRR}$     | -10 dBV at tuner inputs                      | 19     | 21   | 23  | dB   |
| Total harmonic distortion | $THD_{RR}$    | $V_0 = -6$ dBV,<br>EVR is OFF.               | —      | 0.15 | 1.0 | %    |
| Output voltage            | $V_{ORR}$ max | THD = 5%                                     | 0.7    | 1.1  | —   | V    |
| Channel balance           | $CB_{RR}$     |                                              | -2     | 0    | 2   | dB   |
| Interchannel crosstalk    | $CT_{RR}$     | $R_0 = 10$ k $\Omega$ ,<br>1 kHz TUNE filter | 30     | 50   | —   | dB   |

## EVR and power amplifiers

| Parameter                 | Symbol         | Condition                        | Rating |     |     | Unit       |
|---------------------------|----------------|----------------------------------|--------|-----|-----|------------|
|                           |                |                                  | min    | typ | max |            |
| Closed-loop voltage gain  | $V_{GE}$       | EVR is at maximum resistance.    | 28     | 31  | 34  | dB         |
| Total harmonic distortion | $THD_E$        | $P_O = 10$ mW                    | 0.1    | 0.5 | 1.0 | %          |
| Maximum output power      | $P_{O\ max}$   | THD = 10%                        | 20     | 33  | —   | mW         |
| Output noise voltage      | $V_{NORE}$     | EVR is OFF.<br>DIN AUDIO filter  | —      | 170 | 500 | $\mu$ V    |
| Maximum EVR attenuation   | $\alpha_{ATT}$ | EVR is OFF.<br>1 kHz TUNE filter | 50     | 70  | —   | dB         |
| EVR input impedance       | $R_{IEV}$      |                                  | 35     | 50  | 65  | k $\Omega$ |

## Preamplifiers and power amplifiers

| Parameter                                                           | Symbol     | Condition                                     | Rating |     |     | Unit |
|---------------------------------------------------------------------|------------|-----------------------------------------------|--------|-----|-----|------|
|                                                                     |            |                                               | min    | typ | max |      |
| Channel balance                                                     | $CB_T$     |                                               | -2     | 0   | 2   | dB   |
| Interchannel crosstalk                                              | $CT_T$     | $R_D = 2.2$ k $\Omega$ ,<br>1 kHz TUNE filter | 30     | 38  | —   | dB   |
| Crosstalk between forward and reverse playback preamplifiers        | $CT_{HH}$  | 1 kHz TUNE filter                             | 30     | 65  | —   | dB   |
| Crosstalk between playback and tuner inputs                         | $CT_{HR}$  | 1 kHz TUNE filter                             | 50     | 70  | —   | dB   |
| Crosstalk between recording amplifier outputs and microphone inputs | $CT_{MRH}$ | Recording mode,<br>1 kHz TUNE filter          | 50     | 70  | —   | dB   |

## Automatic gain control


| Parameter                | Symbol      | Condition                           | Rating |     |     | Unit |
|--------------------------|-------------|-------------------------------------|--------|-----|-----|------|
|                          |             |                                     | min    | typ | max |      |
| AGC response             | $AGC_W$     | From activation to 5% THD at RECOUT | 35     | 42  | —   | dB   |
| Channel balance          | $AGC_{BLC}$ |                                     | -2     | 0   | 2   | dB   |
| Minimum activation level | $AGC_{INS}$ |                                     | -30    | -27 | -24 | dBV  |

## Common amplifier

| Parameter                 | Symbol      | Condition                                     | Rating |     |     | Unit    |
|---------------------------|-------------|-----------------------------------------------|--------|-----|-----|---------|
|                           |             |                                               | min    | typ | max |         |
| Closed-loop voltage gain  | $V_{GPWR}$  | $R_{XR} = 5$ k $\Omega$                       | 9      | 11  | 13  | dB      |
| Total harmonic distortion | $THD_{PWR}$ | $P_O = 50$ mW                                 | —      | 0.6 | 1.0 | %       |
| Output noise voltage      | $V_{NOPWR}$ | $R_{XR} = 5$ k $\Omega$ ,<br>DIN AUDIO filter | —      | 15  | 50  | $\mu$ V |
| Maximum output power      | $P_{OPWR}$  | THD = 10%                                     | 75     | 120 | —   | mW      |
| Microphone supply voltage | $V_{MCC}$   | $I_L = 2$ mA                                  | 2.0    | 2.3 | 2.5 | V       |


| Parameter                 | Symbol     | Condition                                               | Rating |      |     | Unit |
|---------------------------|------------|---------------------------------------------------------|--------|------|-----|------|
|                           |            |                                                         | min    | typ  | max |      |
| Tuner supply voltage      | $V_{TCC}$  | $I_L = 30 \text{ mA}$ , external transistor is 2SA1178. | 2.0    | 2.5  | 2.7 | V    |
| Oscillator supply voltage | $V_{OSCC}$ | $I_L = 15 \text{ mA}$                                   | 0.65   | 0.85 | 1.0 | V    |

## Measurement Circuit

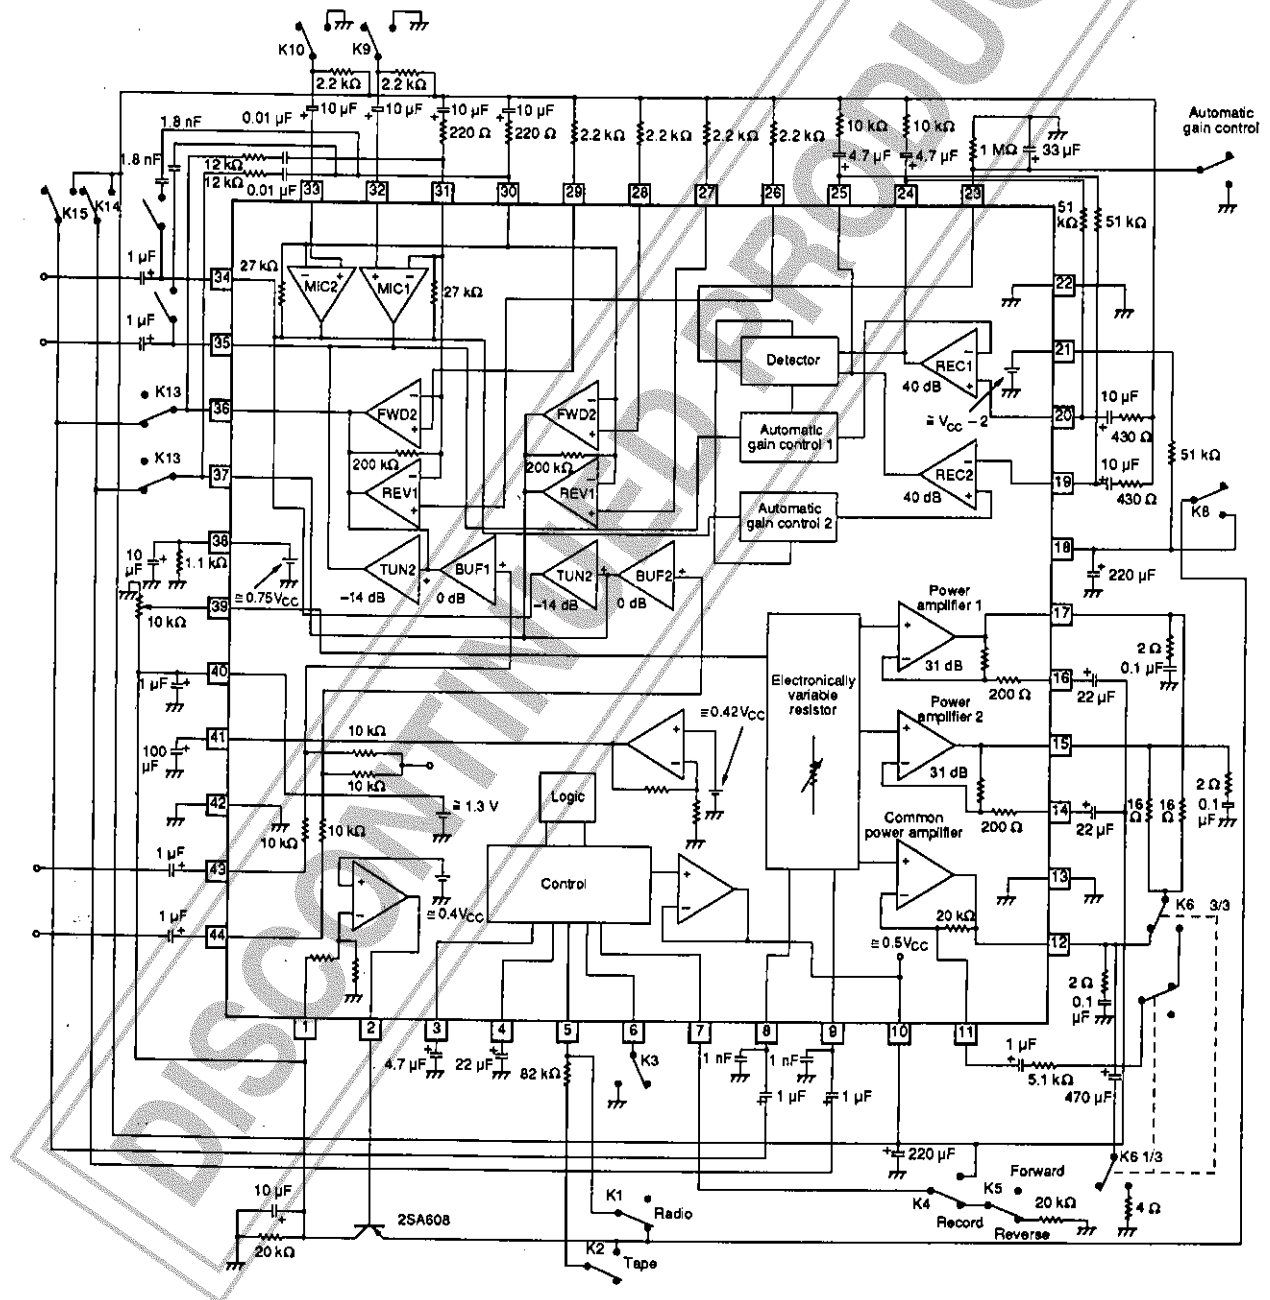


## Typical Performance Characteristics


### Power dissipation vs. ambient temperature

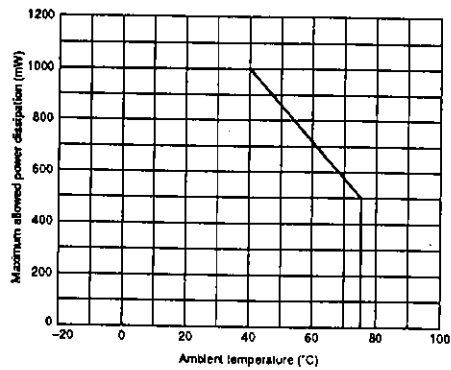

### Quiescent current vs. ambient temperature

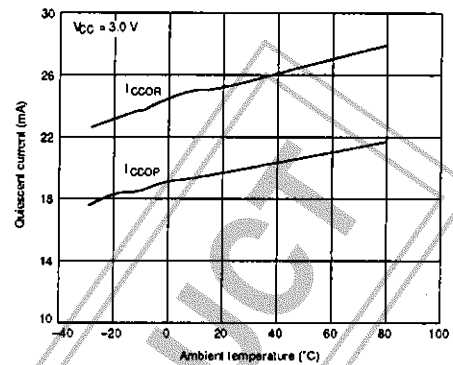


### Quiescent current vs. supply voltage

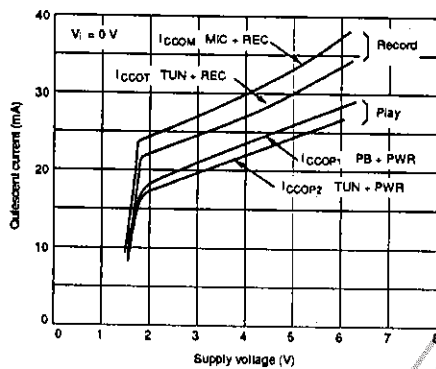


## Playback preamplifiers


### Closed-loop and open-loop gain vs. frequency

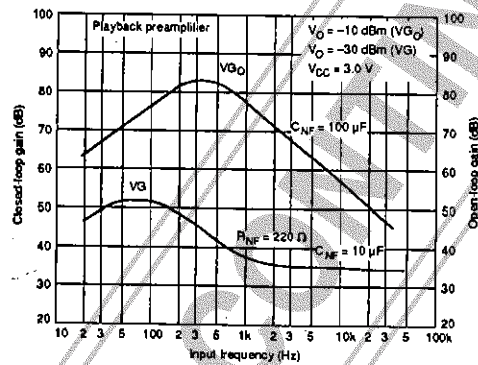


### Closed-loop gain vs. supply voltage

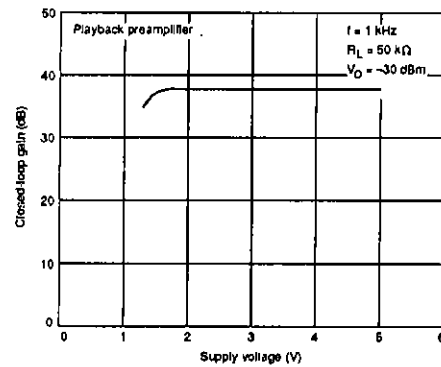


### Closed-loop gain vs. frequency

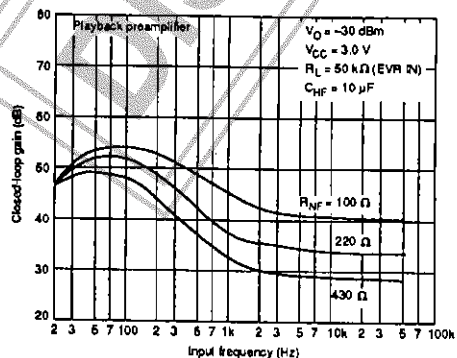


Total harmonic distortion and output voltage vs. Input voltage (1)

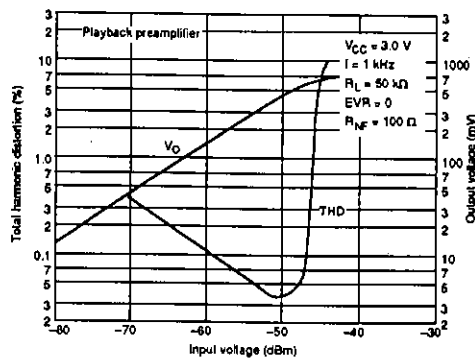


Output noise voltage vs. source resistance

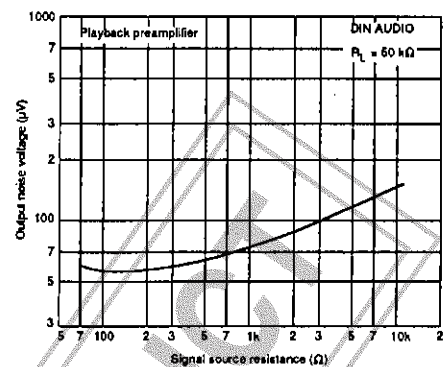


Total harmonic distortion and output voltage vs. Input voltage (2)

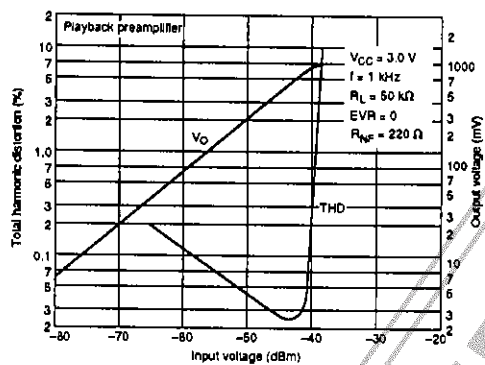


Output noise voltage vs. supply voltage

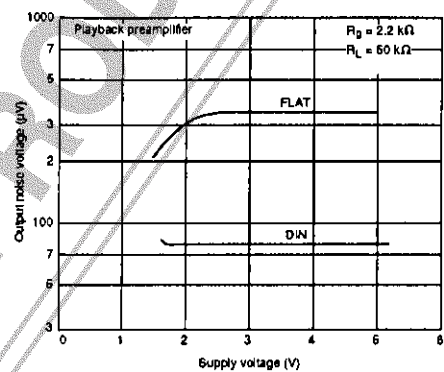


Maximum output voltage vs. supply voltage (1)

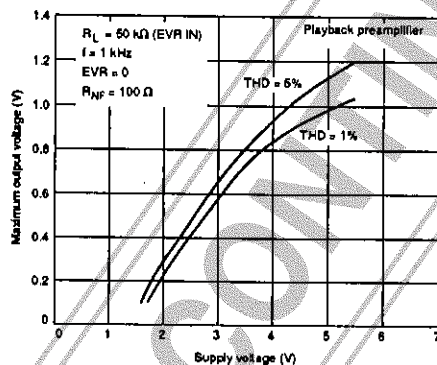


Output DC offset vs. ambient temperature (1)

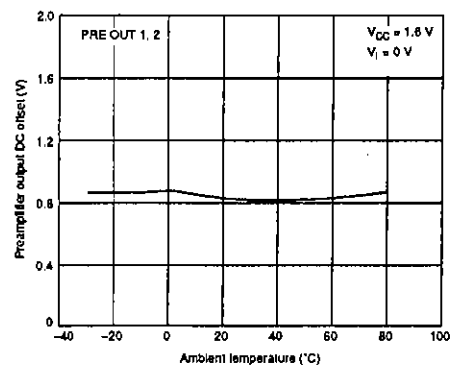


Maximum output voltage vs. supply voltage (2)

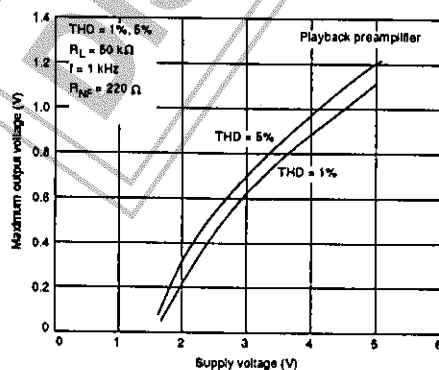


Output DC offset vs. ambient temperature (2)

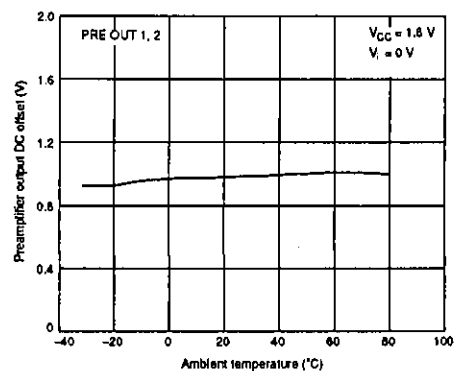

Output DC offset vs. ambient temperature (3)

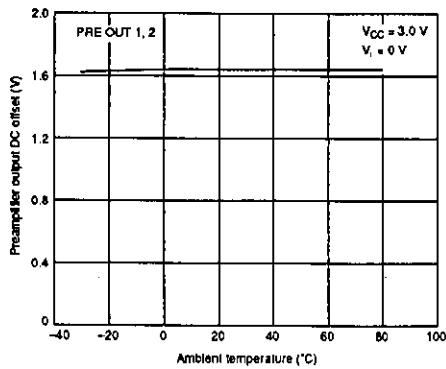


Output DC offset vs. ambient temperature (4)

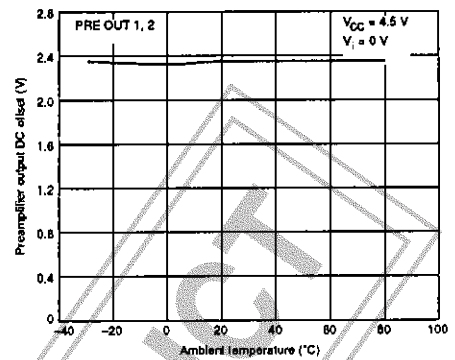


## Preamplifiers, EVR and power amplifiers


Closed-loop gain vs. frequency

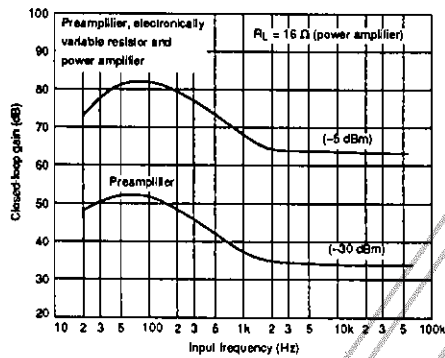


Crosstalk between forward and reverse channels vs. frequency

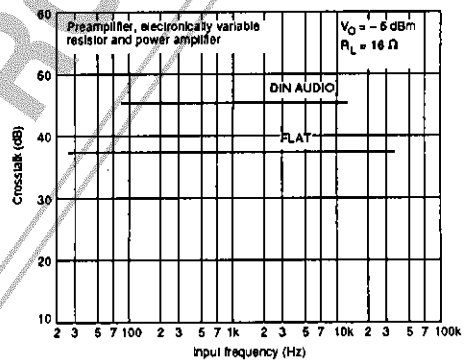


Total playback gain vs. ambient temperature

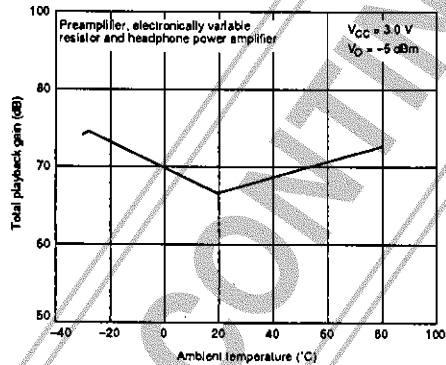


Crosstalk with tuner inputs vs. frequency

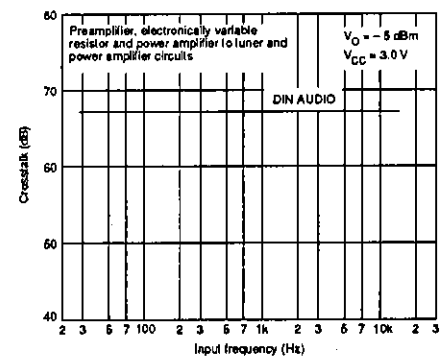


Crosstalk between channels vs. frequency

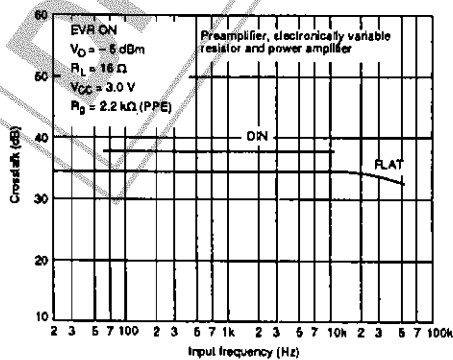

### Crosstalk with microphone and recording amplifiers vs. frequency

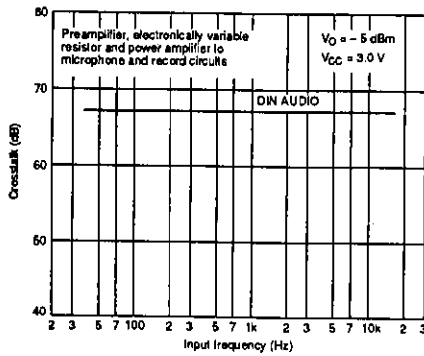


### EVR attenuation vs. potentiometer rotation

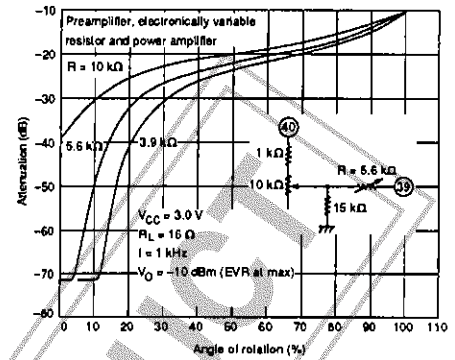


### Tuner preamplifiers

#### Closed-loop gain vs. frequency

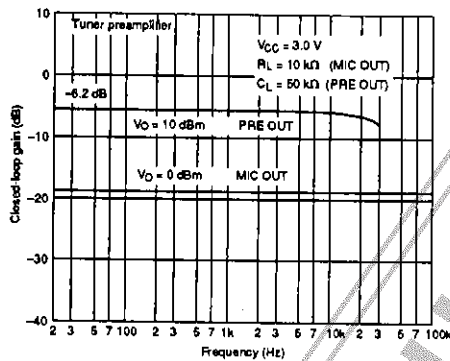


### Playback and tuner preamplifiers


#### Total harmonic distortion and output voltage vs. Input voltage

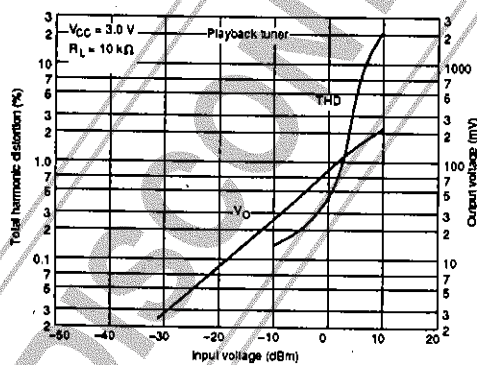


#### Maximum output voltage vs. supply voltage

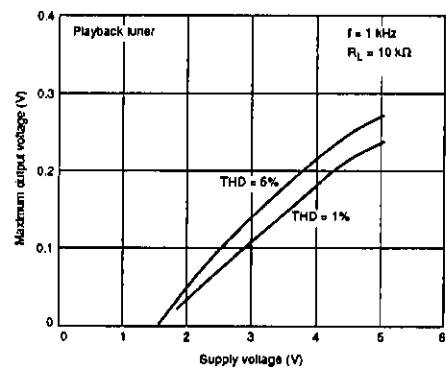


Crosstalk between channels vs. frequency (1)

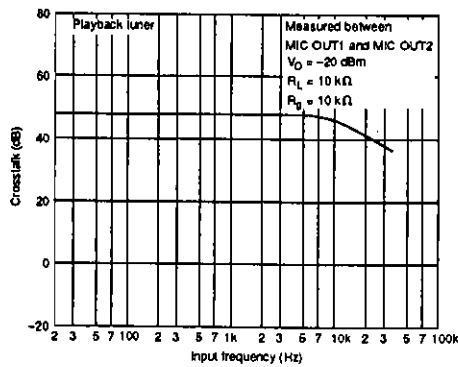


Output noise voltage vs. supply voltage (1)

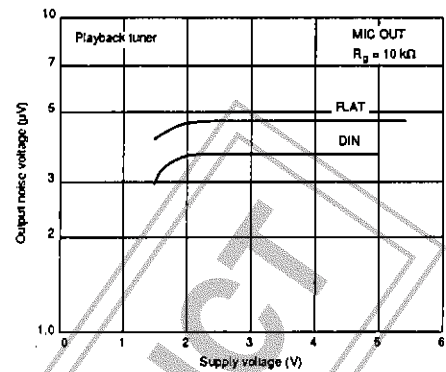

Crosstalk between channels vs. frequency (2)

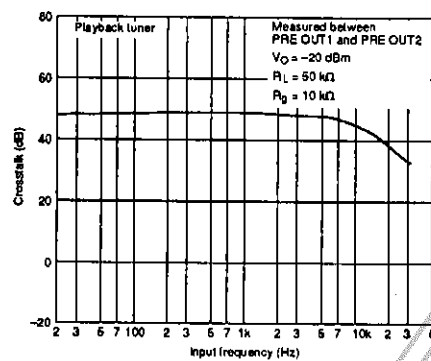


Output noise voltage vs. supply voltage (2)

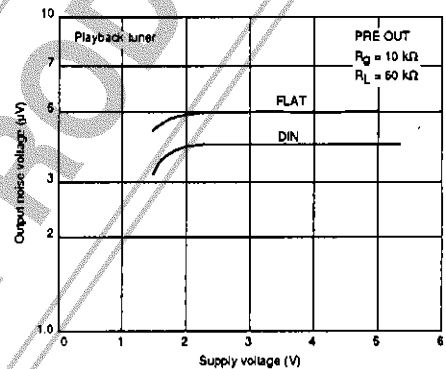


## Common amplifier


Open-loop voltage gain vs. frequency

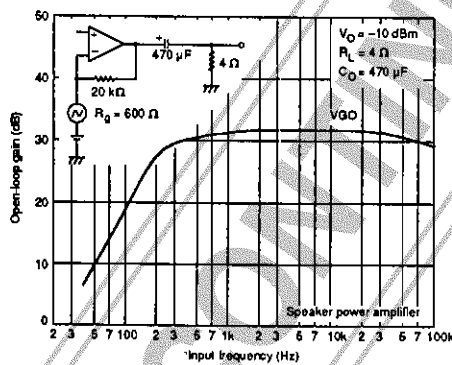


Closed-loop voltage gain vs. frequency (2)

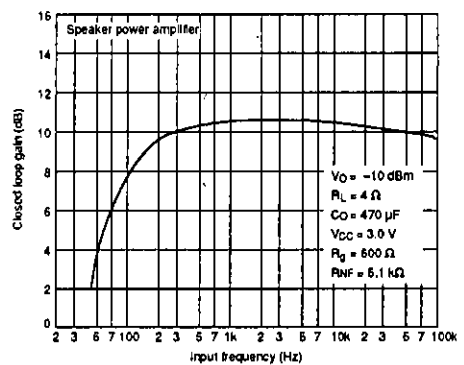


Closed-loop voltage gain vs. frequency (1)

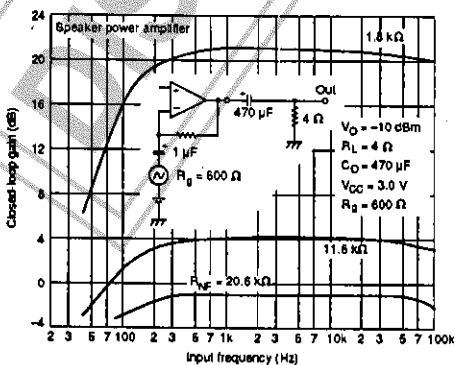


Closed-loop voltage gain vs. frequency (3)

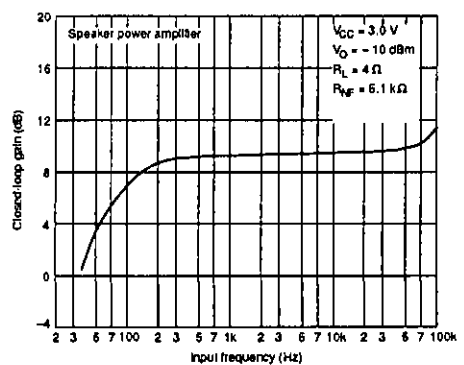


Total harmonic distortion vs. output power

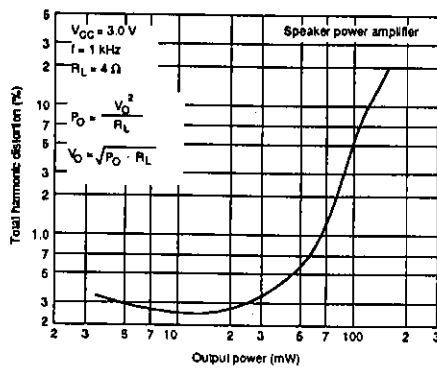


Output impedance vs. frequency

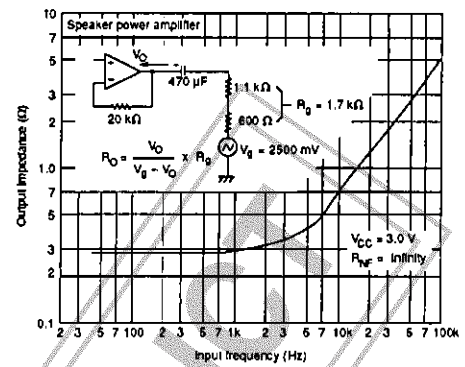


Output noise voltage vs. supply voltage (1)

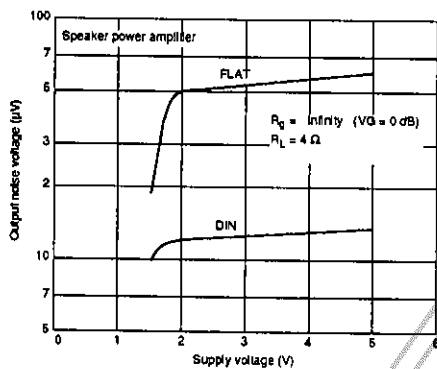


Output power vs. Input voltage

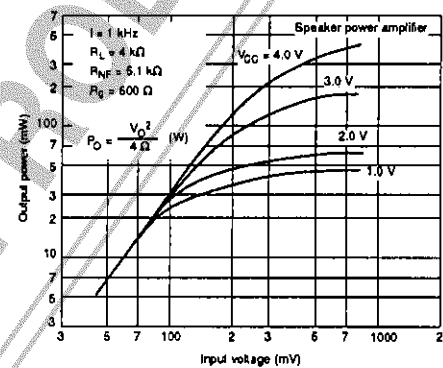


Output noise voltage vs. supply voltage (2)

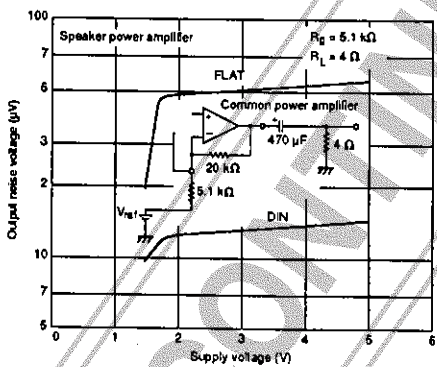

Maximum output power vs. supply voltage

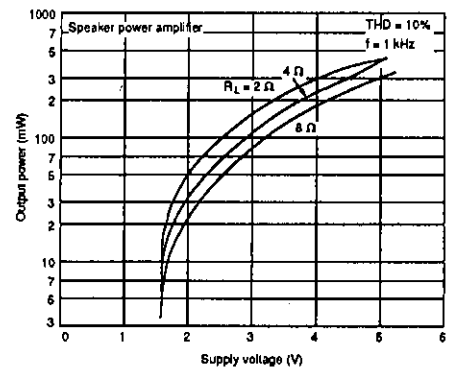


Output impedance vs. negative feedback resistance

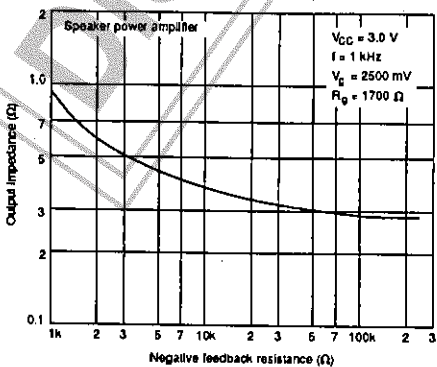


## Headphone amplifiers


Closed-loop voltage gain vs. frequency (1)

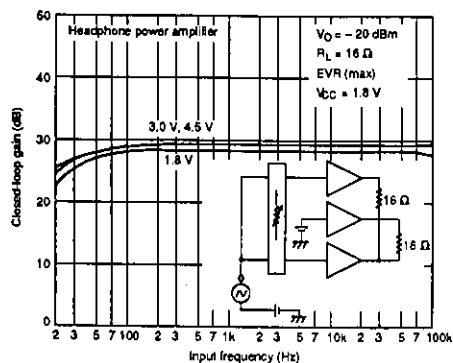


Total harmonic distortion vs. output power (2)

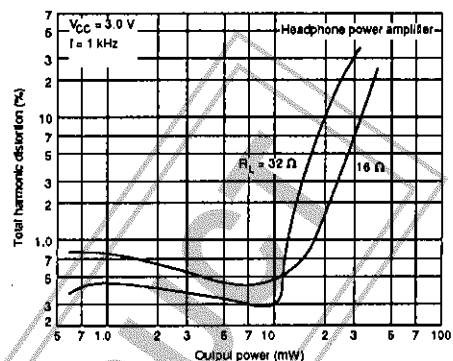


Closed-loop voltage gain vs. frequency (2)

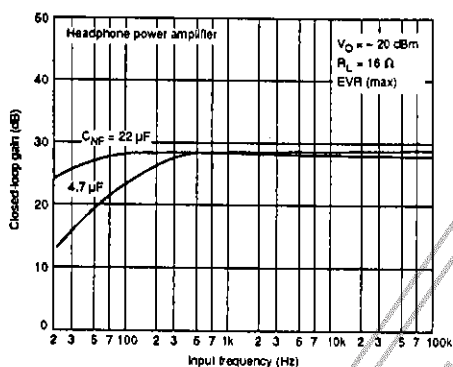


Total harmonic distortion and output voltage vs. input voltage (1)

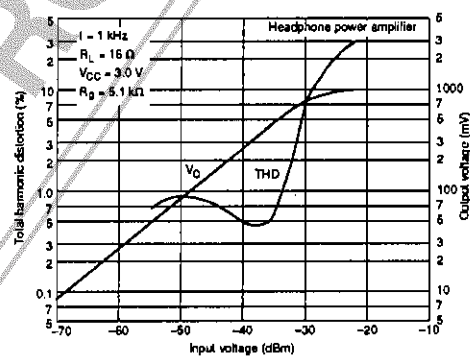


Closed-loop voltage gain vs. frequency (3)

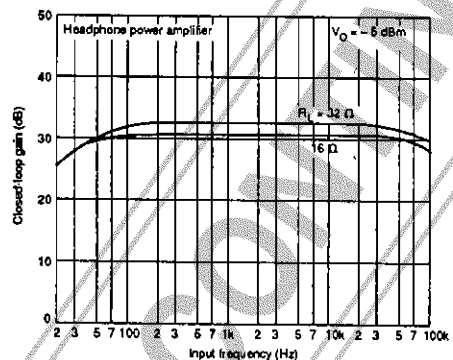


Total harmonic distortion and output voltage vs. input voltage (2)

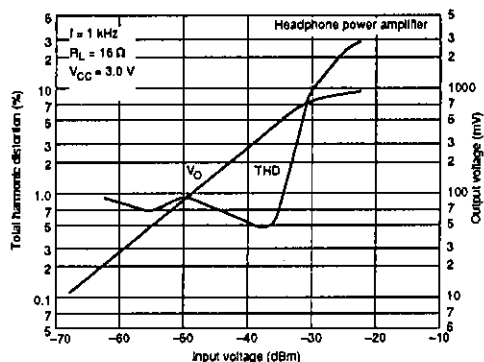


Total harmonic distortion vs. output power (1)

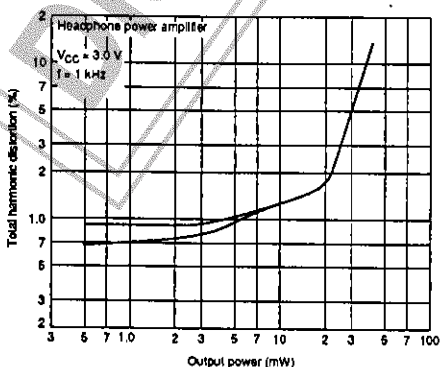


Total harmonic distortion and output voltage vs. Input voltage (3)

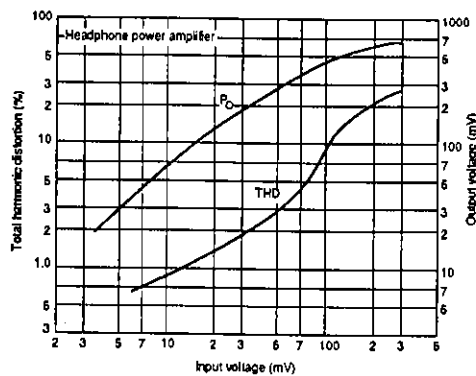


Crosstalk between channels vs. frequency

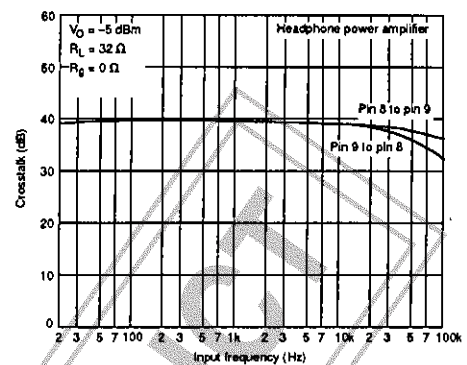


Total harmonic distortion and output voltage vs. Input voltage (4)

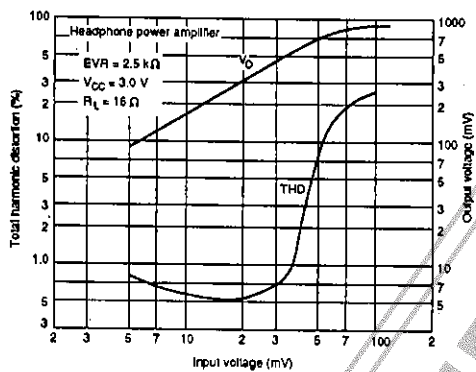


Output noise voltage vs. supply voltage

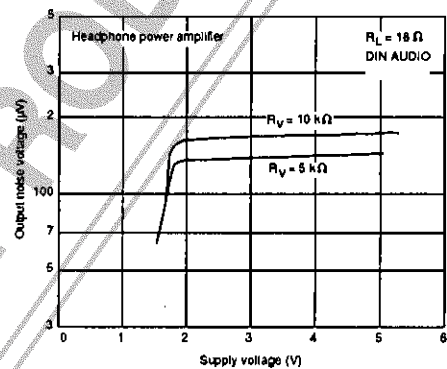


Maximum output voltage vs. ambient temperature

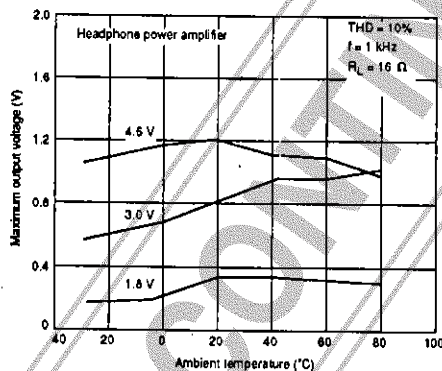


Output voltage vs. ambient temperature (1)

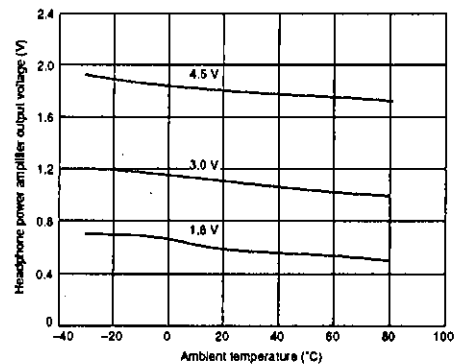


Output voltage vs. Input voltage

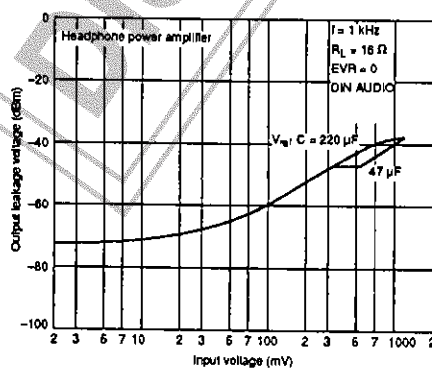


Output voltage vs. ambient temperature (2)

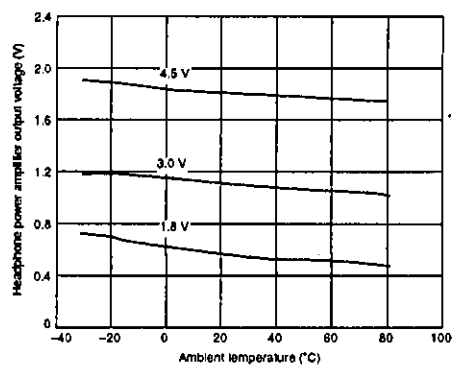

Output power vs. Input voltage

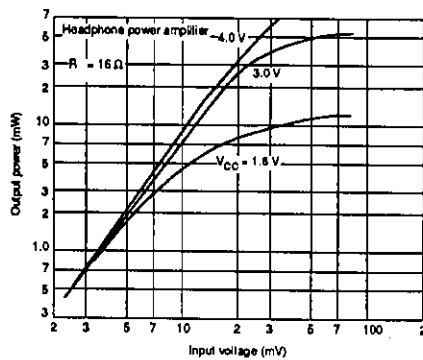


Output power vs. supply voltage

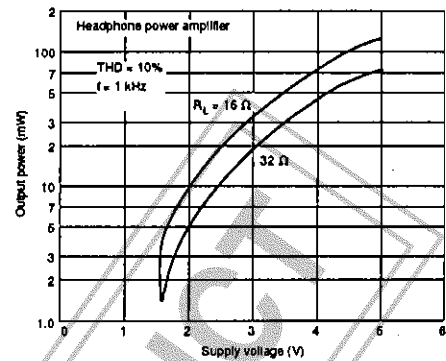


## Headphone and common amplifier


DC offset between headphone outputs vs. ambient temperature (1)

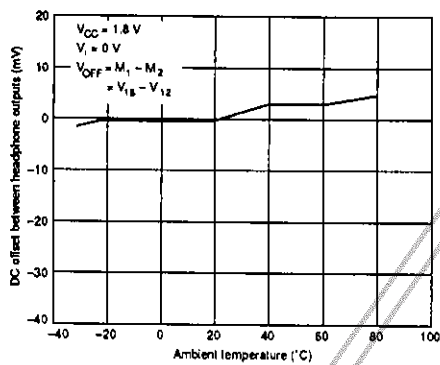


DC offset between headphone outputs vs. ambient temperature (3)

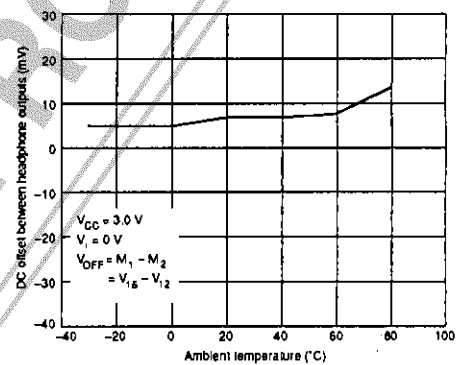


DC offset between headphone outputs vs. ambient temperature (2)

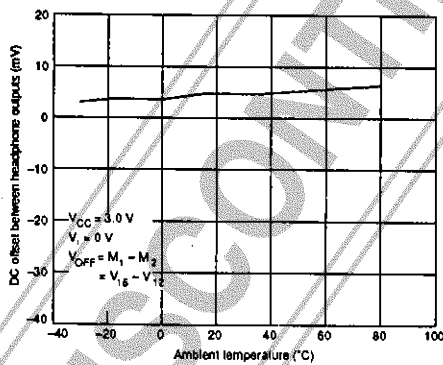


DC offset between headphone outputs vs. ambient temperature (4)

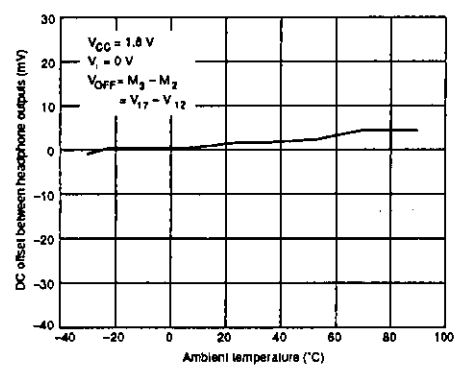


Amplifier DC offset vs. ambient temperature (1)

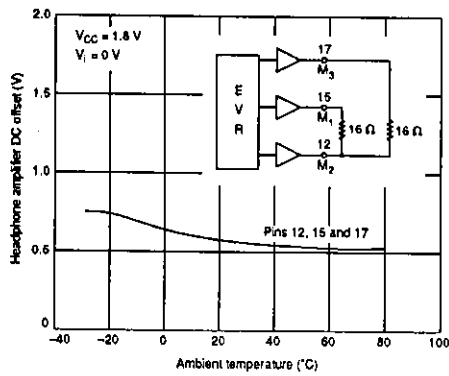


Amplifier DC offset vs. ambient temperature (5)

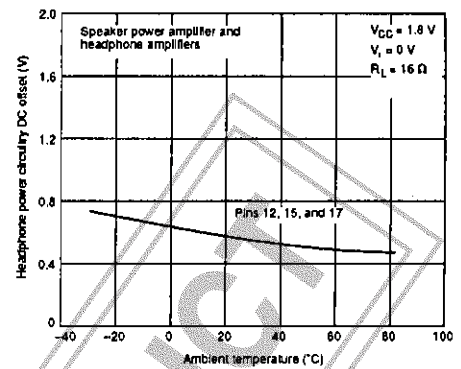


Amplifier DC offset vs. ambient temperature (2)

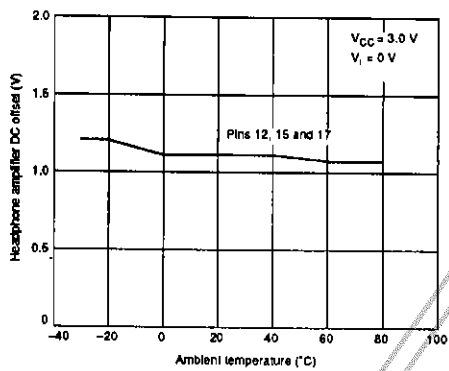


Amplifier DC offset vs. ambient temperature (6)

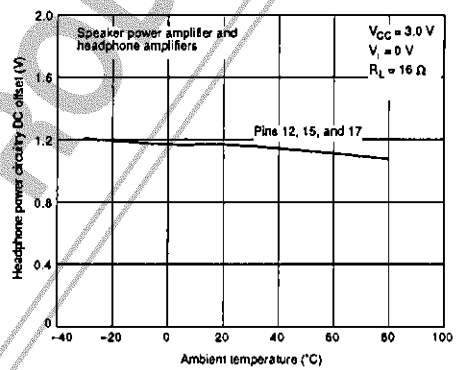


Amplifier DC offset vs. ambient temperature (3)

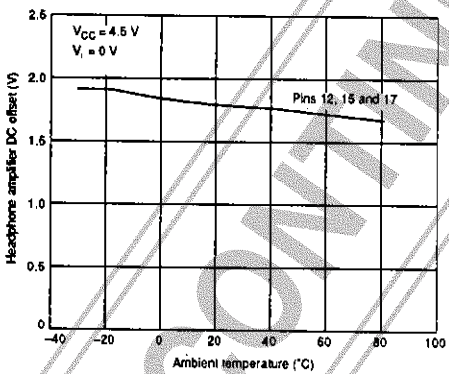


Amplifier DC offset vs. ambient temperature (7)

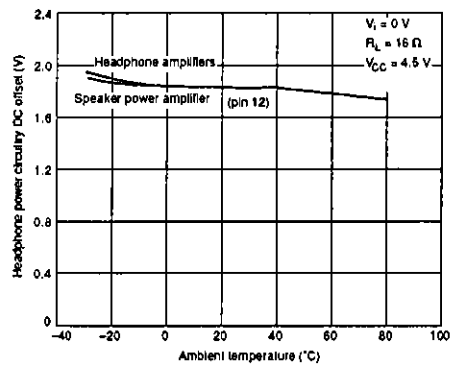

Amplifier DC offset vs. ambient temperature (4)

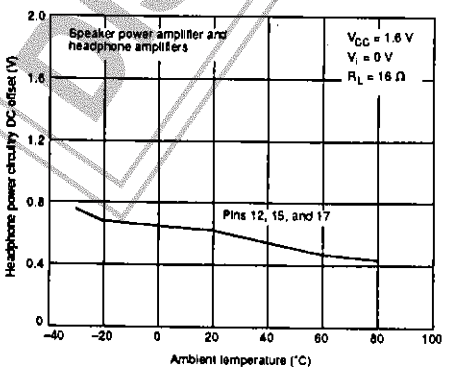


Amplifier DC offset vs. ambient temperature (8)

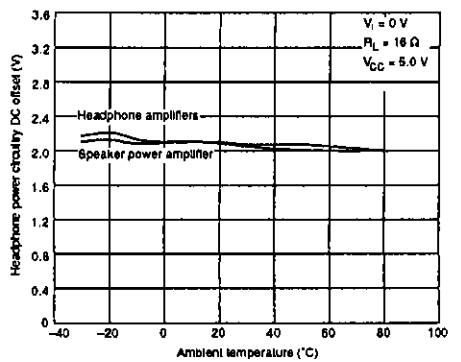


## Playback amplifiers, EVR and power amplifiers

### Crosstalk between forward and reverse channels vs. frequency

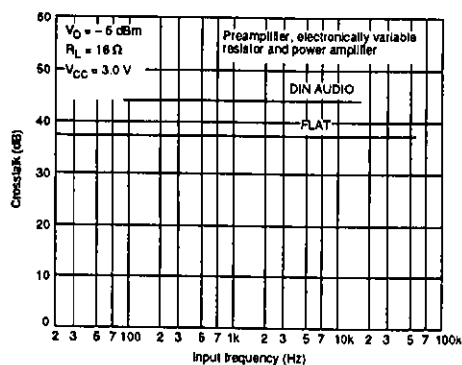


## EVR and headphone amplifiers

### Crosstalk between channels vs. frequency (1)

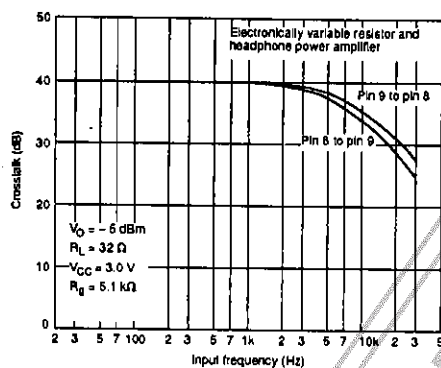


### Crosstalk between channels vs. frequency (2)

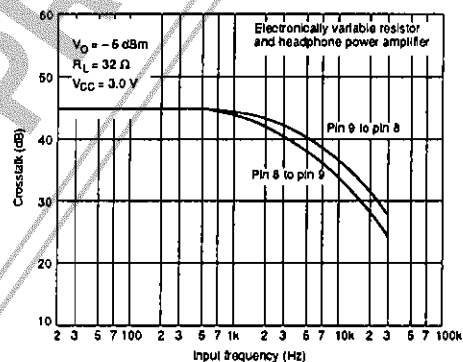


## Microphone and recording amplifiers


### Closed-loop gain vs. frequency

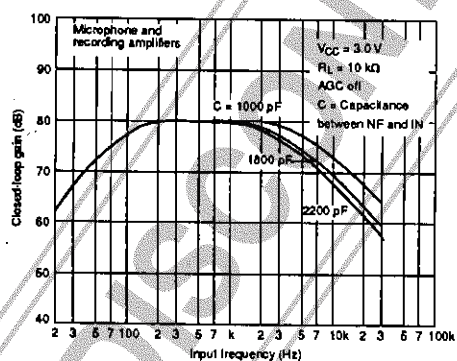


### Total harmonic distortion and output voltage vs. input voltage (1)

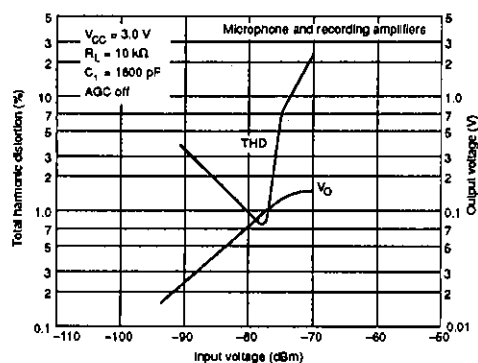


### Total harmonic distortion and output voltage vs. Input voltage (2)

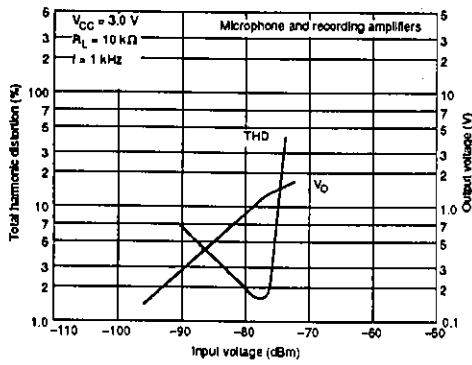


### Crosstalk between channels vs. frequency

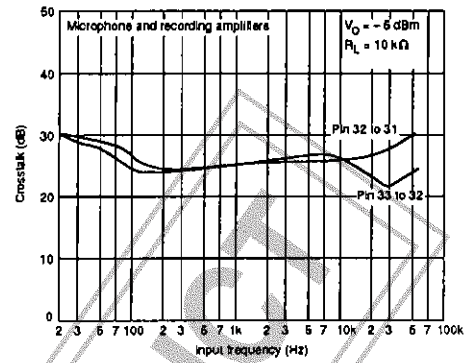


### Maximum output voltage vs. supply voltage

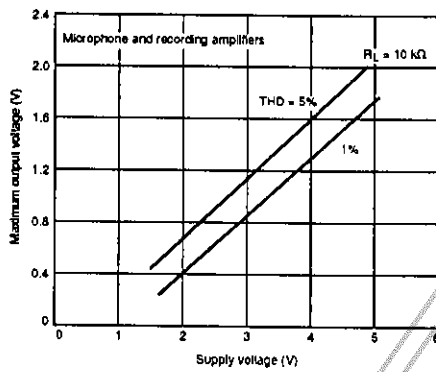


### Output noise voltage vs. supply voltage (1)

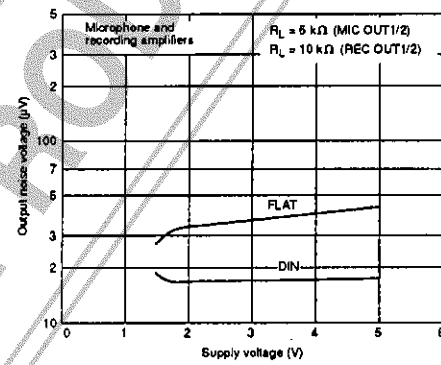

### Crosstalk with tuner and recording amplifiers vs. frequency

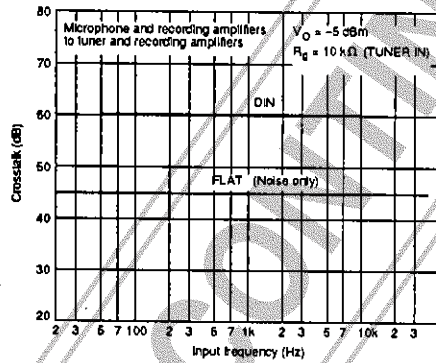


### Output noise voltage vs. supply voltage (2)

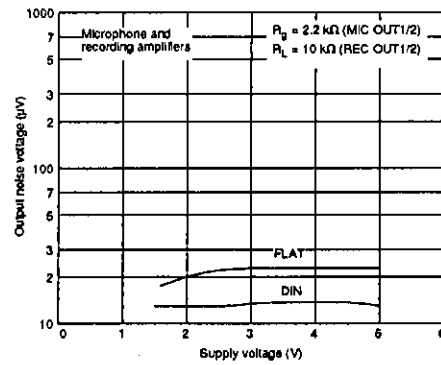


## Microphone amplifiers, AGC and recording amplifiers

Total harmonic distortion and ALC output voltage vs. Input voltage (1)

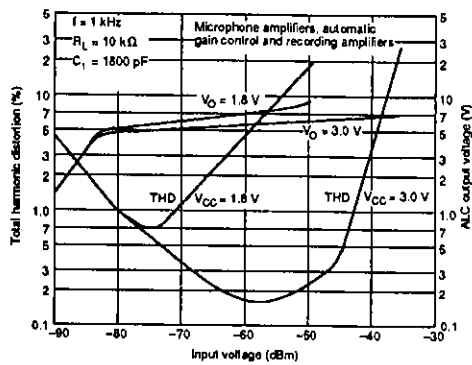


Total harmonic distortion and ALC output voltage vs. Input voltage (2)

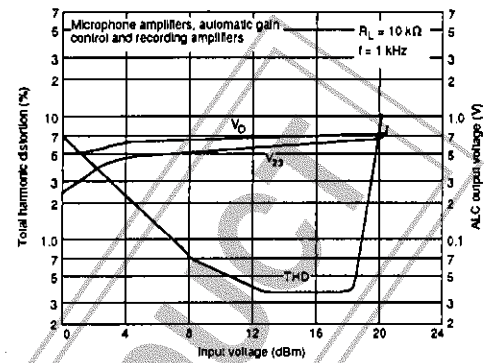


## Tuner and recording amplifiers


Closed-loop voltage gain vs. frequency

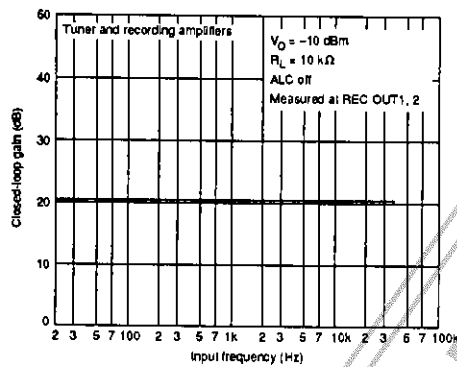


Total harmonic distortion and ALC output voltage vs. Input voltage

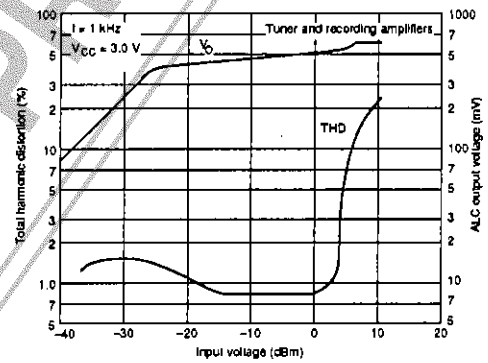


Total harmonic distortion and output voltage vs. Input voltage

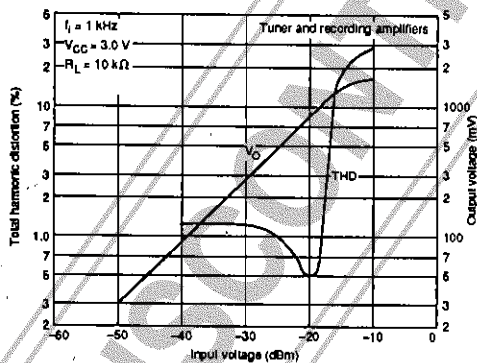


Maximum output voltage vs. supply voltage

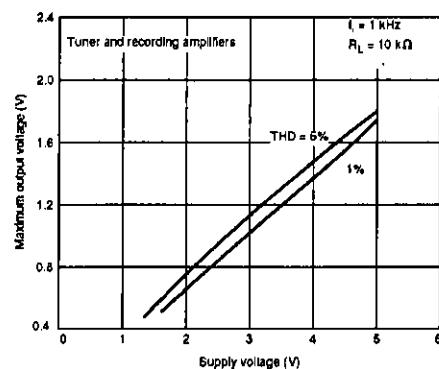

## Output voltage vs. ambient temperature

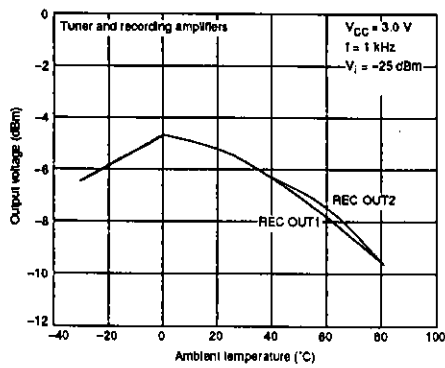


## Crosstalk between channels vs. frequency


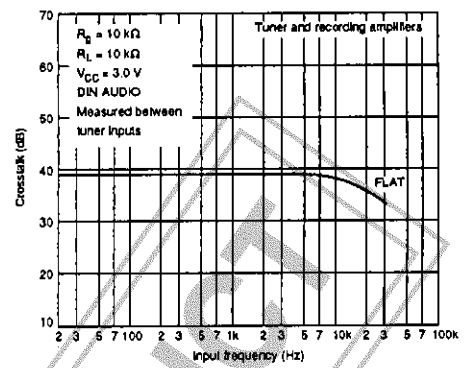


## Recording amplifier


## DC offset vs. ambient temperature

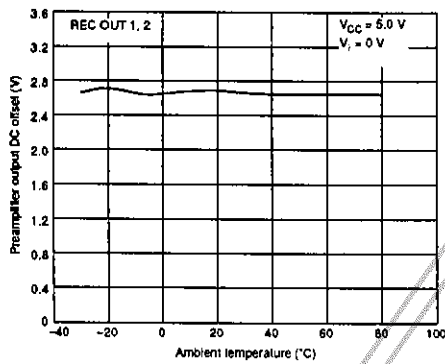


## Reference voltages

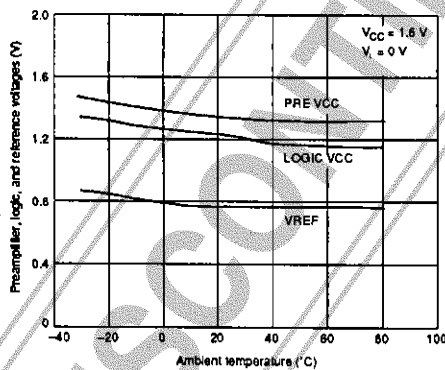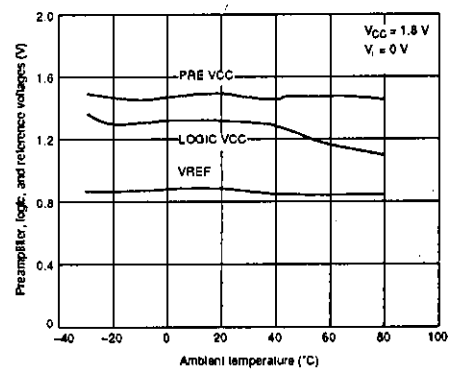 $V_{REF}$ , preamplifier and logic reference voltages vs. ambient temperature (1) $V_{REF}$ , preamplifier and logic reference voltages vs. ambient temperature (2)


**V<sub>REF</sub>, preamplifier and logic reference voltages vs. ambient temperature (3)**

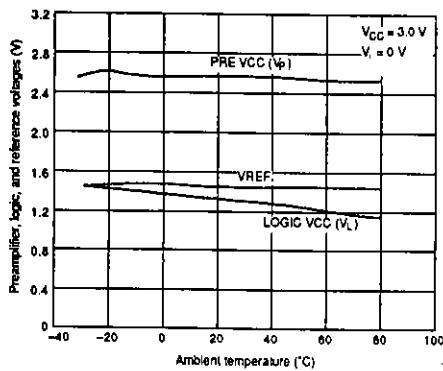


**Preamplifier and logic reference voltages vs. supply voltage**

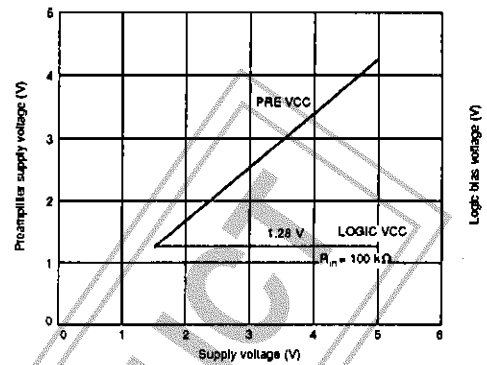


**V<sub>REF</sub>, preamplifier and logic reference voltages vs. ambient temperature (4)**

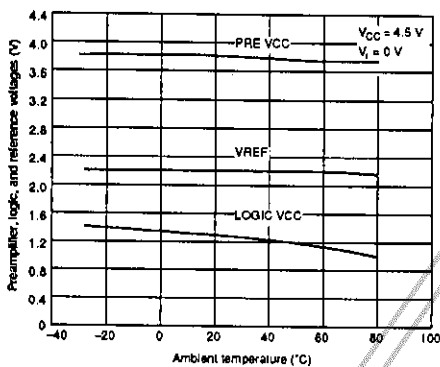


**V<sub>REF</sub> vs. supply voltage**

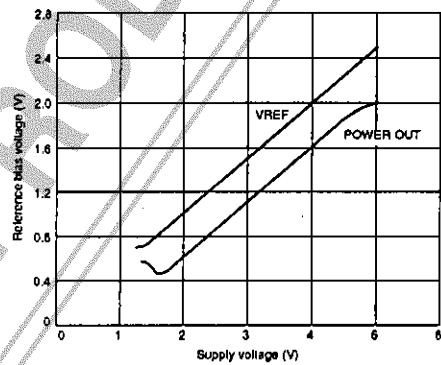


**V<sub>REF</sub>, preamplifier and logic reference voltages vs. ambient temperature (5)**

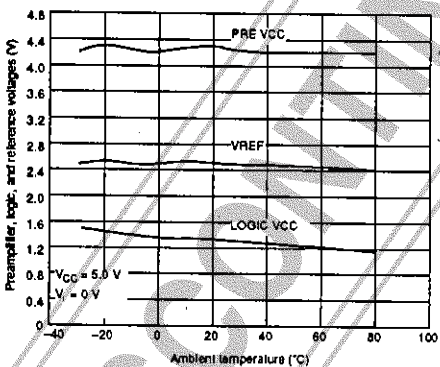


**Microphone supply voltage vs. supply voltage**

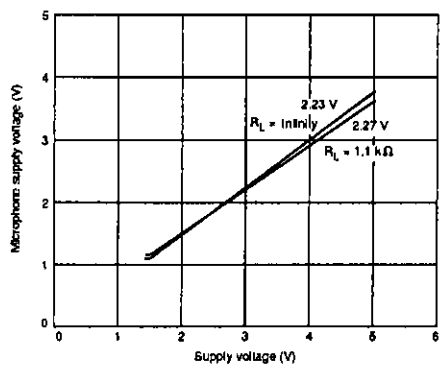

Tuner supply voltage vs. supply voltage

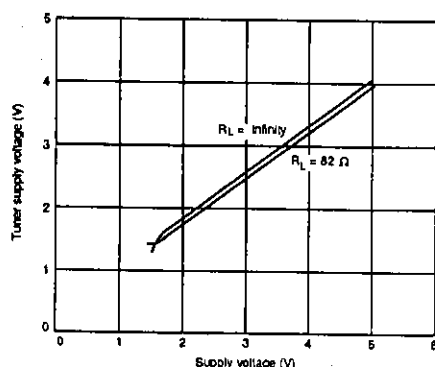

Bias oscillator supply voltage vs. supply voltage

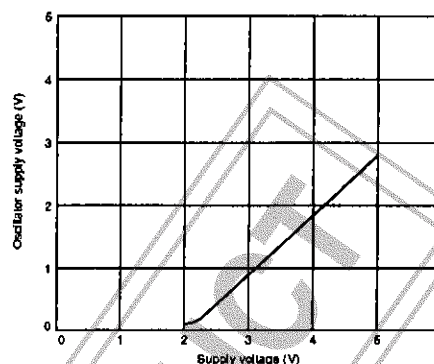

## FUNCTIONAL DESCRIPTION

### Recording Preamplifiers

The recording preamplifiers are coupled to an automatic gain control (AGC) circuit, which keeps the recording signal amplitude relatively constant for large variations in input amplitude. The AGC response time is set by a capacitor connected to AGC TIME. The gain and frequency responses of the recording preamplifiers are adjustable using the feedback networks connected to REC NF1 and REC NF2. The amplified recording signals are output on REC OUT1 and REC OUT2.

### Microphone preamplifiers

MIC IN1 and MIC IN2 are the microphone preamplifier inputs. The gain and frequency responses are adjustable using the feedback networks connected to PRE NF1 and PRE NF2. The amplified microphone signals are output on MIC OUT1 and MIC OUT2 and are used as a signal source for the recording preamplifiers.

### Tuner preamplifiers

TUNER IN1 and TUNER IN2 are the tuner preamplifier inputs. The buffered and amplified signals are output on MIC OUT1 and MIC OUT2 and are used as a signal source for the recording preamplifiers.

### Playback Preamplifiers

PRE IN FWD L CH and PRE IN FWD R CH are the forward playback head preamplifier inputs, and PRE IN REV L CH and PRE IN REV R CH, the reverse playback head preamplifier inputs. The gain and frequency responses are adjustable using the feedback networks connected to PRE NF1 and PRE NF2. The amplified playback signals are output on PRE OUT1 and PRE OUT2.

### Power Amplifiers

#### Output level control

Audio signals are attenuated using an electronic variable resistor (EVR) before being amplified. The level of this attenuation is controlled by the voltage on EVR CONT. An input voltage range of 0 to 1.3 V corresponds to the attenuation range from maximum to minimum attenuation, respectively.

#### Headphone and speaker amplifiers

The power amplifier section comprises three separate amplification channels—two for driving stereo headphones and one common amplifier for driving a low-impedance speaker. Signals are input to the headphone amplifiers on POWER IN1 and POWER IN2 and output on POWER OUT1 and POWER OUT2. The gain and frequency responses of the headphone amplifiers are adjustable using the feedback networks connected to POWER NF1 and POWER NF2. POWER NF1 and POWER NF2 should be connected to VREF through coupling capacitors. The two headphone outputs should be mixed together, then input on SPKR DRIVE IN. The resulting amplified mono signal is output on SPKR DRIVE.

### Reference Voltages

#### Power amplifier reference voltage

The reference voltage at VREF is biased to  $0.5V_{CC}$  and can be used as a virtual earth because the output impedance is less than  $1\ \Omega$ .

The capacitor on FILTER is used to reduce ripple on the reference voltage. A value between 22 and 33  $\mu\text{F}$  is recommended. Larger values increase the power supply startup time. Smaller values can cause an unacceptable amount of ripple.

### External microphone supply

The reference voltage at MIC VCC is biased to  $0.75V_{CC}$  and is used to power external electret condenser microphones.

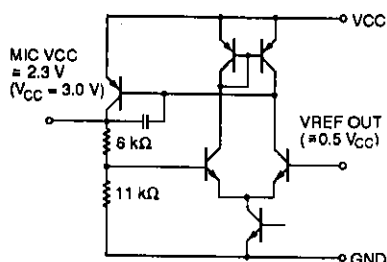


Figure 1. Microphone supply

### Bias oscillator supply

The reference voltage at OSC VCC is biased to  $(V_{CC} - 2)$  V and is used to power an external recording bias oscillator.

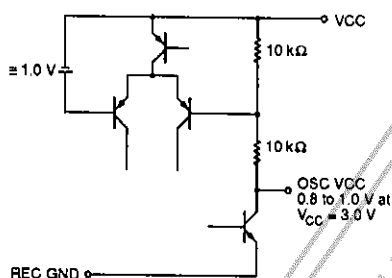


Figure 2. Oscillator supply

### Operating Mode Inputs

#### Tape/tuner/standby modes

VCC/TAPE/TUNER controls the primary operating mode of the LA4583M. When VCC/TAPE/TUNER is connected directly to VCC, the tuner circuits are selected and the tuner supply voltage is output on TUN VCC OUT. TUN VCC CONT can also be used with an external transistor, such as an 2SA608, to supply other circuits while in tuner mode. When VCC/TAPE/TUNER is connected to VCC through an 82 kΩ resistor, the tape circuits are selected. When this pin is left unconnected, the device goes into standby mode.

#### Microphone recording monitor

REC MONITOR ON OFF enables and disables monitoring of the microphone signal during recording. When REC MONITOR ON OFF is connected to ground, the signal being recorded is sent to the headphone outputs.

### Preamplifier reference

The reference voltage at PRE VCC is biased to  $0.42V_{CC}$  and is used to power the internal playback, microphone and tuner preamplifiers.

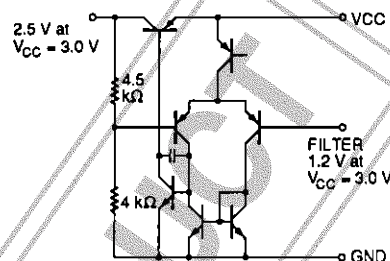


Figure 3. Preamplifier reference

#### Playback direction and recording control

When REC/PLAY/REV CONT is left unconnected, forward playback is selected. When REC/PLAY/REV is connected to ground through a 20 kΩ resistor, reverse playback is selected. When REC/PLAY/REV is connected to VREF, recording mode is selected.

## Mute

Muting is activated when the operating mode is changed, greatly reducing mode switching noise. Muting is released after a delay determined by the capacitor on MUTE TIME C. The delay is approximately 0.4 s with a 4.7  $\mu$ F capacitor. The voltage change on this pin and the resulting mute duration is shown in figure 4.

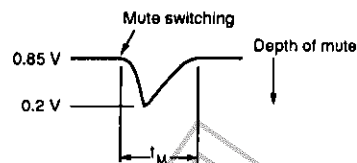


Figure 4. Mute timing

## DESIGN INFORMATION

### Voltage Gain in Different Modes

#### Playback preamplifiers and power amplifiers

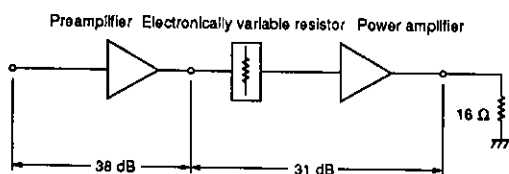


Figure 5. Preamplifier gain

The preamplifier voltage gain can be adjusted using a resistor on the negative feedback inputs. The voltage gain should be kept above 25 dB, otherwise spurious oscillation can occur. The power amplifier gain is fixed at 31 dB. Reducing the power amplifier load to 32  $\Omega$  increases the gain by approximately 1 dB.

#### Common power amplifier




Figure 6. Power amplifier gain

#### Voltage gain calculation

The gain of the common power amplifier can be varied by altering the feedback resistor  $R_{IN}$  as shown in the following equation.  $R_{IN}$  can be set to  $\infty$  if a low output impedance is required.

$$VG = 20 \times \log_{10}((20 \text{ k}\Omega) / R_{IN})$$

#### Microphone and recording amplifiers

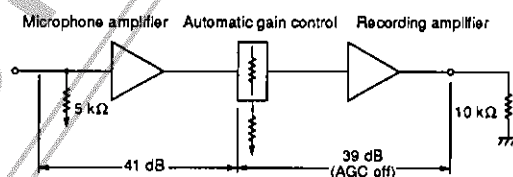


Figure 7. Microphone amplifier gain

The input impedance of the microphone amplifier is 5 k $\Omega$ . As the feedback resistor is 27 k $\Omega$ , care should be taken to limit the gain when using electret condenser microphones.

## Voltage gain calculation

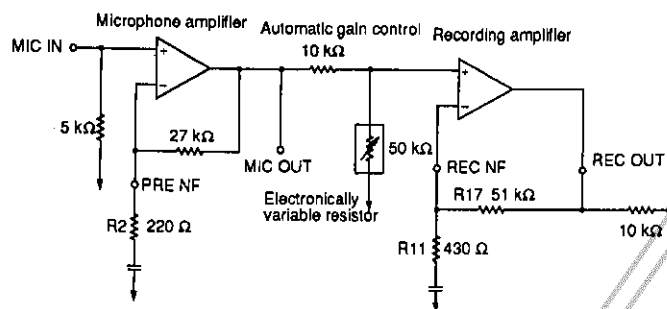


Figure 8. Microphone amplifier

## Microphone amplifier gain

$$VG_{MR} = 20 \times \log_{10}((27 \text{ k}\Omega) / R22)$$

The microphone amplifier gain should be above 25 dB.

## Recording amplifier gain

$$VG_{RR} = 20 \times \log_{10}((51 \text{ k}\Omega) / R11)$$

## Tuner and recording amplifiers

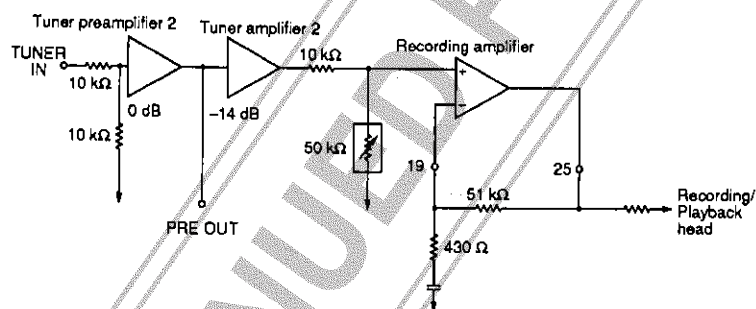


Figure 9. Tuner amplifier

The total gain of the tuner preamplifier and recording amplifier can be calculated as follows.

$$VG_{TR} = (20 \times \log_{10}((51 \text{ k}\Omega) / R11)) - 14 \text{ dB}$$

## APPLICATION NOTES

## Typical Application

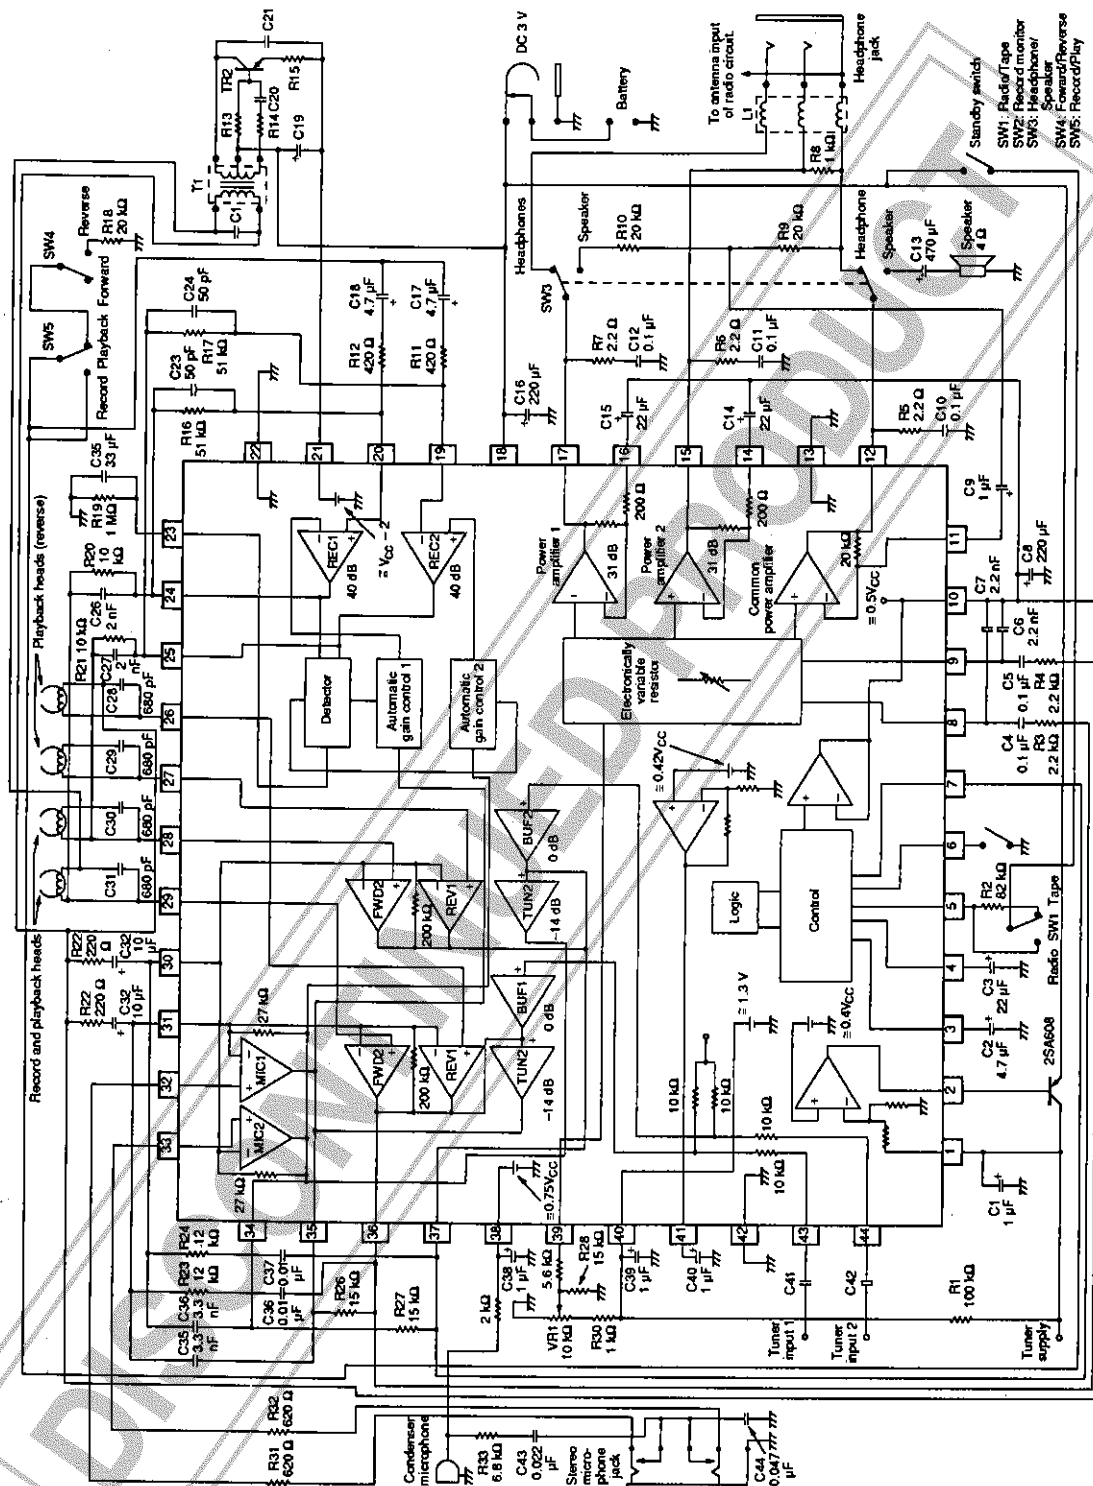


Figure 10. Typical application

## Description of external components

### Microphone preamplifiers

MIC VCC supplies power to an external electret condenser microphone through a current limiting resistor and a decoupling capacitor, C38. A value between 1 and 3.3  $\mu\text{F}$  should be chosen. R33 and C43 couple the audio signal to the MIC IN inputs and should be selected according to the microphone used. R31 and R32 are included as static discharge protection for the preamplifier inputs. A value between 510 and 1 k $\Omega$  should be used. R22, R23, C32 and C33 are placed in the negative feedback path of the microphone and playback preamplifiers to create a low-frequency cutoff of 40 Hz. Values should be chosen from those in the following table.

| R22, R23     | C32, C33          |
|--------------|-------------------|
| 100 $\Omega$ | 33 $\mu\text{F}$  |
| 200 $\Omega$ | 22 $\mu\text{F}$  |
| 300 $\Omega$ | 10 $\mu\text{F}$  |
| 400 $\Omega$ | 4.7 $\mu\text{F}$ |

C35 and C36 are highpass filter capacitors which, in conjunction with the internal 27 k $\Omega$  feedback resistors, remove noise from the microphone inputs. A value between 2.2 and 4.7  $\mu\text{F}$  should be used. R22 and R23 set the gain of the microphone and playback preamplifiers. A value between 100 and 390  $\Omega$  should be used. R26 and R27 are used to connect the microphone outputs to the power amplifier inputs for record mode monitoring. A value of 15 k $\Omega$  is recommended.

### Playback preamplifiers

C28 to C31 are the playback head highpass filter capacitors and should be selected to suit the head used. Values between 330 and 2200 pF are recommended. C36 and C37 are the equalization curve setting capacitors. A value should be selected to suit the manufacturer's specifications.

### Recording amplifiers

R11, R12, R16 and R17 set the recording amplifier voltage gain. Values of 420  $\Omega$  for R11 and R12, and 51 k $\Omega$  for R16 and R17 are recommended. C23 and C24 are placed in parallel with R16 and R17 to reduce ringing on the recording amplifier outputs. A value between 30 and 50 pF should be used. C17 and C18 are negative feedback capacitors and should be connected so that the positive poles are connected to pins 19 and 20. A value of 4.7  $\mu\text{F}$  is recommended. C26 and C27 perform highpass filtering on the outputs and should be selected to suit the manufacturers specifications. R20 and R21 represent the load on the outputs. A value of 10 k $\Omega$  is recommended.

The AGC circuit coupled to the recording amplifier has a response that is dependent on the values of R19 and C25. R19 sets the attack time and C25 sets the recovery time. A value between 300 k $\Omega$  and 2 M $\Omega$  should be used for R19, and 22 to 47  $\mu\text{F}$ , for C25.

### Power amplifiers

C4 and C5 couple the preamplifier outputs to the power amplifier inputs. Connect the positive poles towards the preamplifier inputs and select a value between 0.1 and 1  $\mu\text{F}$ . R3, R4, C6 and C7 form highpass filters for audio signals entering the power amplifiers. A value between 0 and 3 k $\Omega$  should be used for R3 and R4, and 560 to 2200 pF, for C6 and C7. C14 and C15 are the negative feedback capacitors for the headphone amplifiers. Connect the positive poles toward the outputs and choose a value between 10 and 22  $\mu\text{F}$ . The low-frequency cutoff is approximately 36 Hz with 22  $\mu\text{F}$  capacitors. On the output of each channel is an RC network designed to suppress unwanted oscillation. A value between 1.5 and 3.0 k $\Omega$  should be chosen for resistors R5 to R7. The corresponding capacitors, C10 to C12, should be 0.1  $\mu\text{F}$  ceramic capacitors.

The two output channels of the headphone amplifiers are combined and input on SPKR DRIVE IN, the input to the common power amplifier. The recommended circuit is shown in figure 11. Resistor values should be selected from the following equations.




Figure 11. Speaker drive circuit

#### Note

R8 = 1 to 2 k $\Omega$

R9 and R10 = 20 k $\Omega$

$$V_o = 31 \text{ dB} \times ((40 \text{ k}\Omega) / R_9) \times V_i$$

If  $R_9 = R_{10}$  and  $R_9 \gg R_8$ , then

$$V_o = (V_{o1} / R_{10} + V_{o2} / R_9) \times (20 \text{ k}\Omega)$$

If  $V_{o1} = V_{o2} = V_o'$ , then

$$V_{i1} = V_{i2} = V_i$$

$$V_o = V_o' (2/R_9) \times (20 \text{ k}\Omega)$$

$$= V_o' ((40 \text{ k}\Omega) / R_9)$$

The output of the common amplifier is used to drive a low-impedance speaker through a coupling capacitor, C13. A value between 220 and 470  $\mu\text{F}$  should be selected, however, a 470  $\mu\text{F}$  capacitor is recommended if high output is required.

#### Tuner preamplifiers

C41 and C42 are coupling capacitors for the TUN IN1 and TUN IN2 inputs. A value between 0.01 and 0.1  $\mu\text{F}$  should be used.

#### Mode selection and switching

R2 is used with VCC/TAPE/TUNER CONT. This tristate input requires a resistor connected to VCC to activate the tape circuits. A value between 70 and 90  $\text{k}\Omega$  can be chosen, however, 82  $\text{k}\Omega$  is the recommended value.

R18 is used with REC/PLAY/REV CONT. This tristate input requires a resistor connected to ground to select reverse playback. A value between 15 and 24  $\text{k}\Omega$  can be chosen, however, 20  $\text{k}\Omega$  is the recommended value.

R1 is the tuner power supply startup resistor. If not present, tuner power supply operation is not guaranteed. A value between 50 and 100  $\text{k}\Omega$  should be used.

The capacitor on MUTE TIME C, C2, determines the mute time. A value of 4.7  $\mu\text{F}$  will result in a mute time of approximately 0.4 s.

#### External bias oscillator circuit

The values of all components related to the external bias oscillator circuit, R13 to R15 and C19 to C22, should be selected according to the manufacturers specifications.

#### Electronic variable resistor (EVR)

R28 sets the minimum output signal level. A value of 15  $\text{k}\Omega$  is recommended. R29 sets the maximum output signal level for which a value of 5.6  $\text{k}\Omega$  is recommended. R30 has been added to protect the EVR input from damage due to static discharge.

#### Supply and reference voltages

C1 is the tuner power supply decoupling capacitor. A value between 1 and 10  $\mu\text{F}$  should be used. C3 is the ripple filter capacitor for the reference voltage for which a value of 22  $\mu\text{F}$  is recommended. C8 is the reference bias decoupling capacitor for which a value of 220  $\mu\text{F}$  is recommended. C16 decouples the LA4583M supply. Again, a value of 220  $\mu\text{F}$  is recommended.

C39 is both the logic supply decoupling capacitor and oscillation suppressor for which a value between 0.01 and 0.1  $\mu\text{F}$  should be used. C40 decouples the preamplifier bias supply for which a value between 4.7 and 10  $\mu\text{F}$  should be selected.

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.