




BASIC SOCKET SERIES DESIGNATION FOR:

Series XA


MEETS THE REQUIREMENTS OF:

MIL-DTL-12883


SOCKET DRAWING

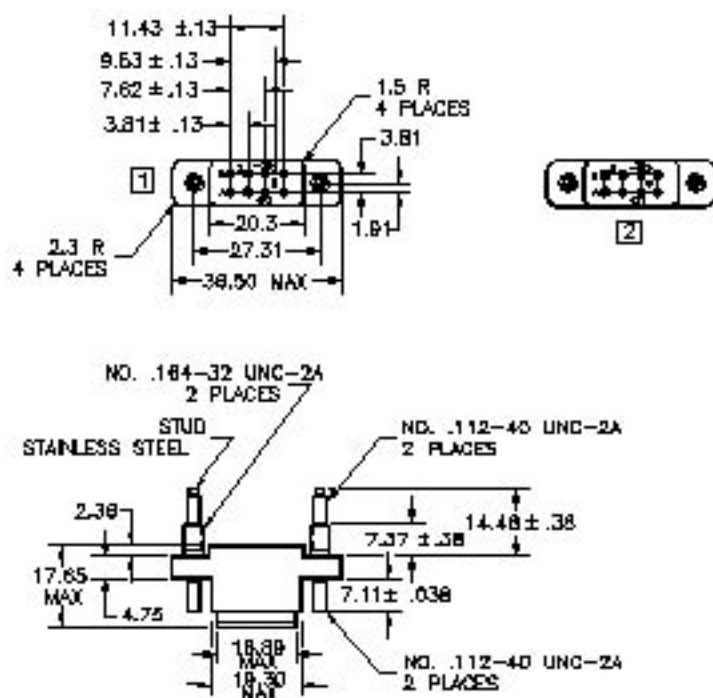

HARDWARE MOUNTING MOUNTING DETAIL 2 PLACES

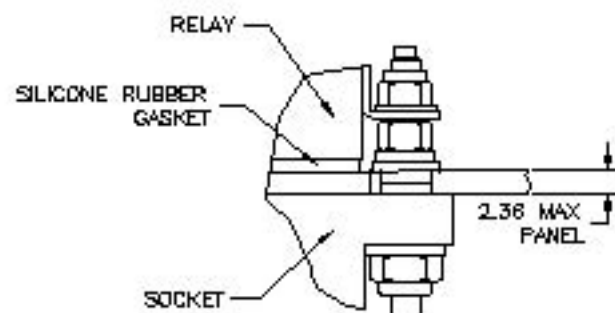

BOTTOM MOUNT-CLEARANCE HOLE FOR 5mm SCREW TOP MOUNT-CLEARANCE HOLE FOR 3mm SCREW

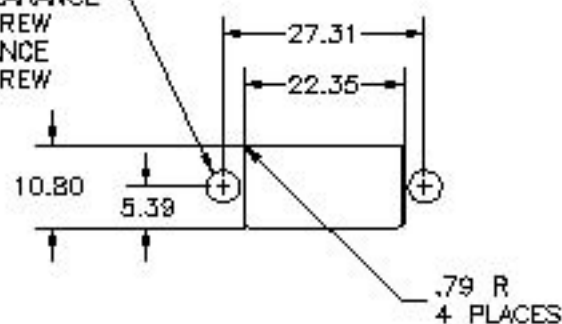

MOUNTING DIMENSIONS

GENERAL CHARACTERISTICS

[1]. Supplied with mounting hardware and NO. 20 contacts and crimp for coil code J (SO-1064-10444).

[2]. Supplied with mounting hardware and NO. 20 contacts and crimp for coil codes F,K (SO-1064-10445).

3. Standard tolerances .xx ± .25; xxx ± .13 mm

4. Weight 15 grams max.

5. Temperature range -70° C to +125° C.



Featuring **LEACH**® power and control solutions
www.esterline.com

AMERICAS
6900 Orangethorpe Ave.
P.O. Box 5032
Buena Park, CA 90622

Tel: (01) 714-736-7599
Fax: (01) 714-670-1145

EUROPE
2 Rue Goethe
57430 Sarrebourg
France

Tel: (33) 3 87 97 31 01
Fax: (33) 3 87 97 96 86

ASIA
Units 602-603 6/F Lakeside 1
No.8 Science Park West Avenue
Phase Two, Hong Kong Science Park
Pak Shek Kok, Tai Po, N.T.
Hong Kong
Tel: (852) 2 191 3830
Fax: (852) 2 389 5803

Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.