


NYL CRIMP

MATERIAL: Copper
PLATING: Electro-Tin (.0003 Min.)
INSULATION: Nylon, Color Coded Red
STUD SIZES: "D" $\pm$.005

* Optional Configuration

SD028

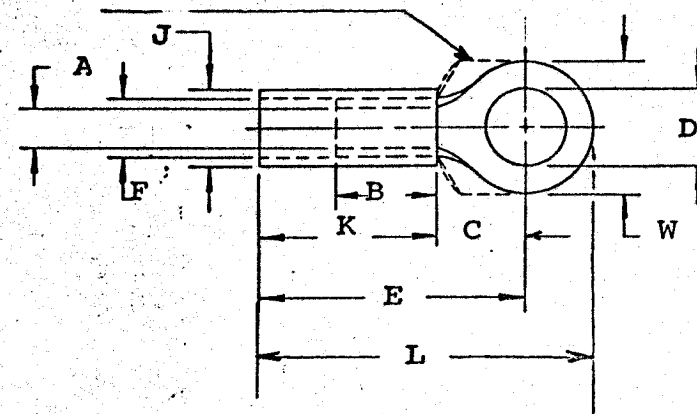

10 - .198"
 14 - .265"
 56 - .328"
 38 - .390"
 76 - .453"
 12 - .515"
 58 - .656"
 34 - .781"

Part Number	"W"	"C" Min.	"E" Max.	"K" Max.	"L" Max.	"A" Min.Avg.	"F" (MWID)	Stock Thickness	"J" Max.	"B" Min.	Available Stud Size
G-774-	.893 .867	.693	1.793	1.035	2.240	.355	.512	.075	.630	.495	14, 56, 38, 76, 12, 58
G-775-*	.643 .617	.693	1.793	1.035	2.077	.355	.512	.075	.630	.495	10, 14, 56, 38, 76
G-776-	.893 .867	.990	2.080	1.035	2.516	.355	.512	.075	.630	.495	14, 56, 38, 76, 12, 58
G-777-	1.265 1.242	.990	2.080	1.035	2.683	.355	.512	.075	.630	.495	14, 56, 38, 76, 12, 58, 34

NOTE: (MWID) denotes maximum wire insulation diameter.

REVISION		SCALE: _____	DATE
		DRWN. BY: JTK	1-21-70
		CHKD. BY: _____	
		APPRD. BY: _____	
		DRAWING NO.:	

ETC molex
 INCORPORATED
 CLEVELAND, OHIO

TITLE: CUSTOMER DRAWING
 #2 WIRE RANGE (G)
 RING
 TONGUE TERMINAL

DIMENSIONAL TOLERANCE UNLESS OTHERWISE SPECIFIED		
FRAC.	DEC.	ANG.
$\pm$	$\pm$	$\pm$