

# Multilayer Balun Transformers

For 2.4GHz W-LAN/Bluetooth

## HHM Series

Type:            **HHM1710D1 (1.6×0.8×0.6mm)**  
                     **HHM1711D1 (1.6×0.8×0.6mm)**  
                     **HHM1712D1 (1.6×0.8×0.6mm)**  
                     **HHM1713E2 (1.6×0.8×0.6mm)**

Issue date:     December 2010


- All specifications are subject to change without notice.
  - Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.
-

# Multilayer Chip Baluns For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

HHM Series HHM1710D1


## SHAPES AND DIMENSIONS

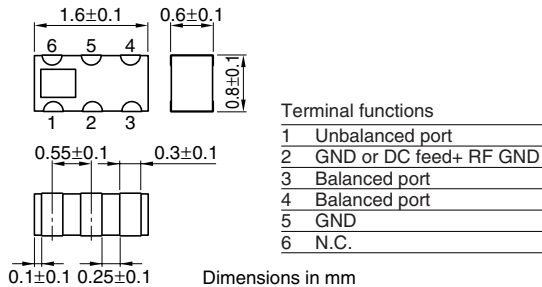

## CIRCUIT DIAGRAM

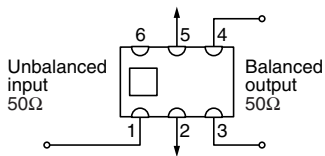

## RECOMMENDED PC BOARD PATTERNS

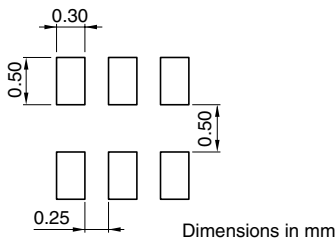

## ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50Ω
Balanced impedance	50Ω
Frequency range	2400 to 2500MHz
Unbalanced port return loss	10dB min.
Phase imbalance at balanced port	180±10deg.
Amplitude imbalance at balanced port	0±2.0dB
Insertion loss	1.2dB max.
Temperature range	Operating -40 to +85°C
	Storage -40 to +85°C
Packaging style and quantities	4000pieces/reel


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


### FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 50Ω


#### RETURN LOSS

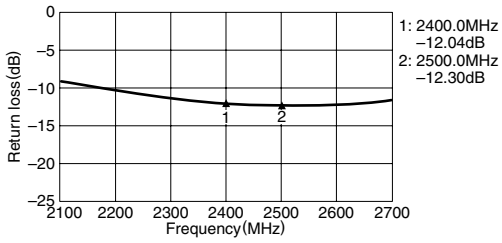


#### AMPLITUDE BALANCE

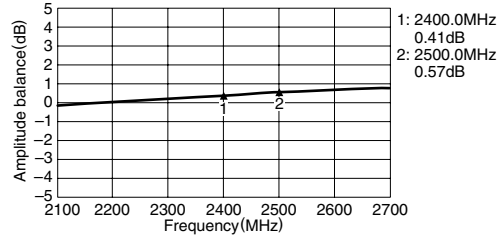

#### INSERTION LOSS

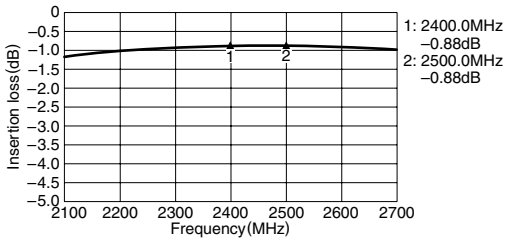

#### PHASE BALANCE

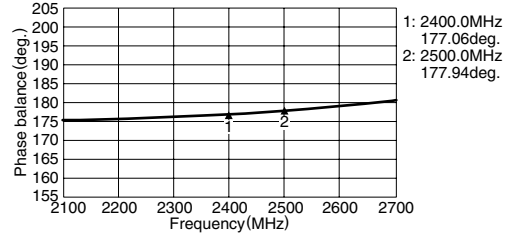


# Multilayer Chip Baluns For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

HHM Series HHM1711D1


## SHAPES AND DIMENSIONS

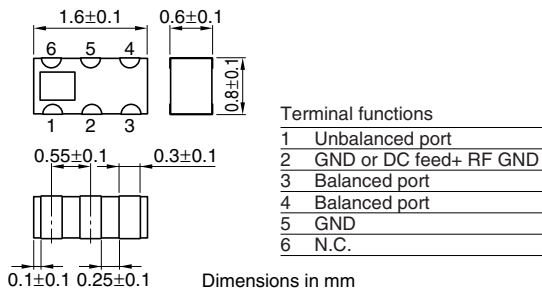

## CIRCUIT DIAGRAM

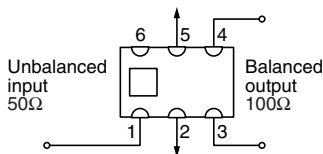

## RECOMMENDED PC BOARD PATTERNS

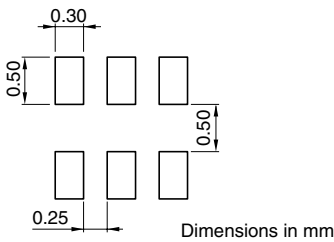

## ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50Ω	
Balanced impedance	100Ω	
Frequency range	2400 to 2500MHz	
Unbalanced port return loss	10dB min.	
Phase imbalance at balanced port	180±10deg.	
Amplitude imbalance at balanced port	0±2.0dB	
Insertion loss	1.2dB max.	
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C
Packaging style and quantities	4000pieces/reel	


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


### FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 100Ω


#### RETURN LOSS

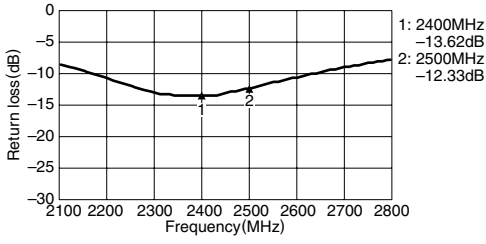


#### AMPLITUDE BALANCE

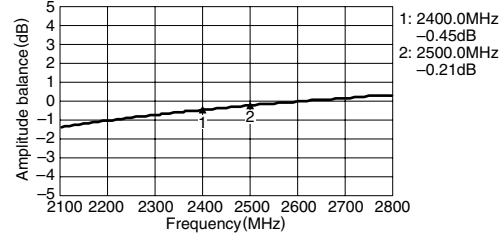

#### INSERTION LOSS

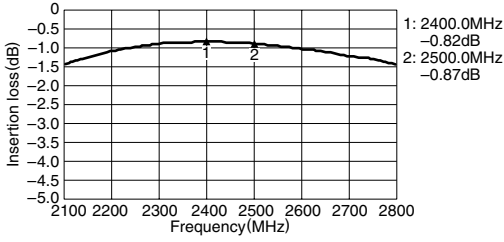

#### PHASE BALANCE

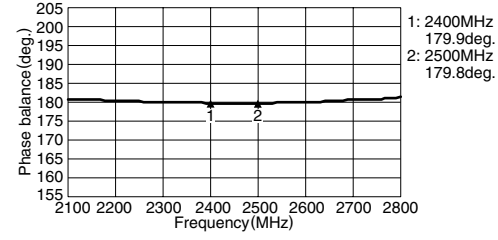


# Multilayer Chip Baluns For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

HHM Series HHM1712D1


## SHAPES AND DIMENSIONS

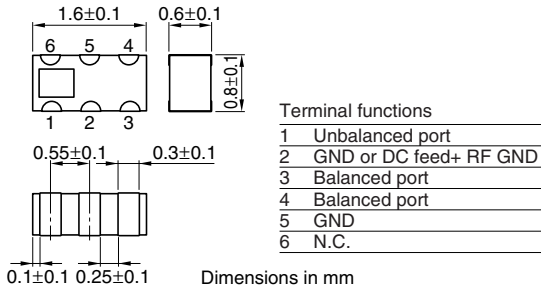

## CIRCUIT DIAGRAM

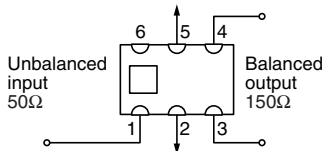

## RECOMMENDED PC BOARD PATTERNS

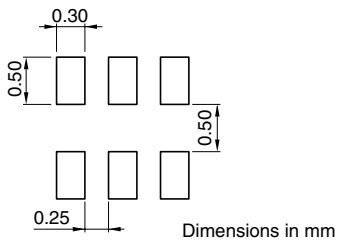

## ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50Ω	
Balanced impedance	150Ω	
Frequency range	2400 to 2500MHz	
Unbalanced port return loss	10dB min.	
Phase imbalance at balanced port	180±10deg.	
Amplitude imbalance at balanced port	0±2.0dB	
Insertion loss	1.2dB max.	
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C
Packaging style and quantities	4000pieces/reel	


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


### FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 150Ω


#### RETURN LOSS

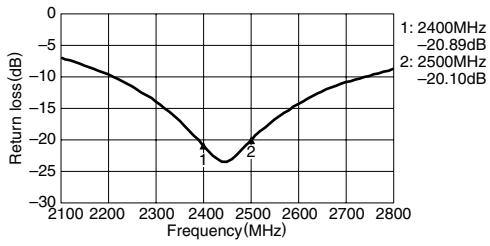


#### AMPLITUDE BALANCE

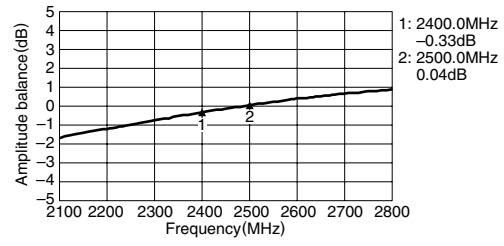

#### INSERTION LOSS

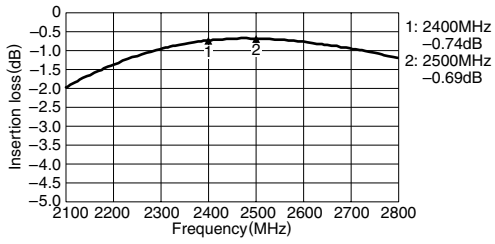

#### PHASE BALANCE

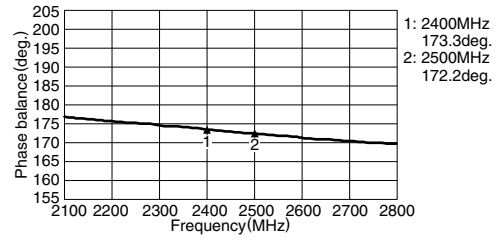


# Multilayer Chip Baluns For Bluetooth & 2.4GHz W-LAN


Conformity to RoHS Directive

HHM Series HHM1713E2


## SHAPES AND DIMENSIONS

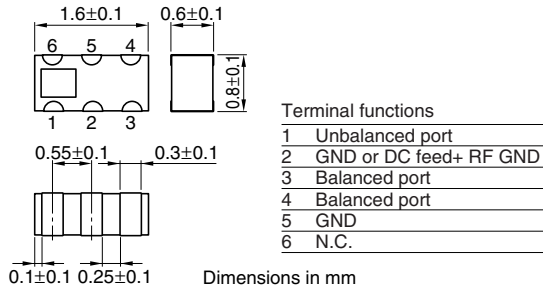

## CIRCUIT DIAGRAM

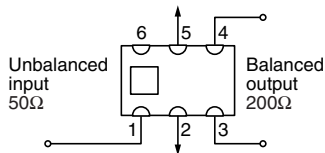

## RECOMMENDED PC BOARD PATTERNS

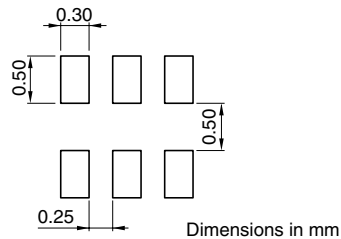

## ELECTRICAL CHARACTERISTICS

Unbalanced impedance	50Ω	
Balanced impedance	200Ω	
Frequency range	2400 to 2500MHz	
Unbalanced port return loss	10dB min.	
Phase imbalance at balanced port	180±10deg.	
Amplitude imbalance at balanced port	0±1.7dB	
Insertion loss	1.2dB max.	
Temperature range	Operating	-40 to +85°C
	Storage	-40 to +85°C
Packaging style and quantities	4000pieces/reel	

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.


• All specifications are subject to change without notice.




### FREQUENCY CHARACTERISTICS

Unbalance 50Ω/Balance 200Ω


#### RETURN LOSS

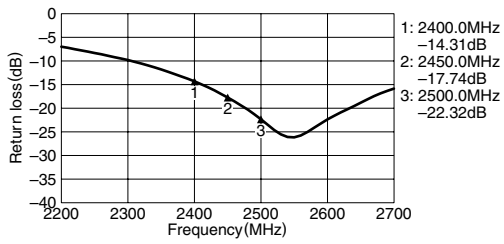


#### AMPLITUDE BALANCE

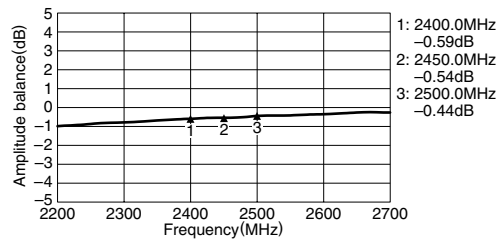

#### INSERTION LOSS

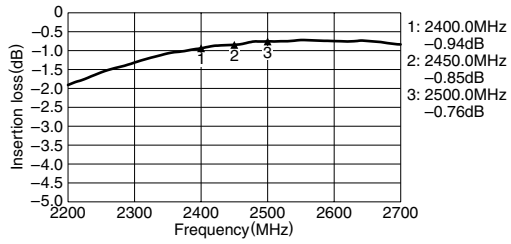

#### PHASE BALANCE

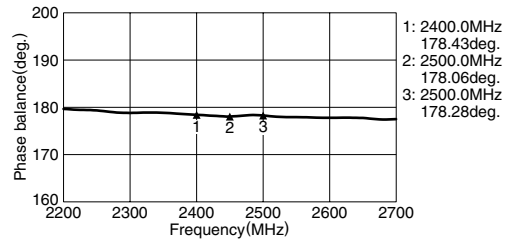

• All specifications are subject to change without notice.