

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

G

14

P

LTR

DESCRIPTION

DATE

DWN

APVD

C

REV / 0720-0967-96

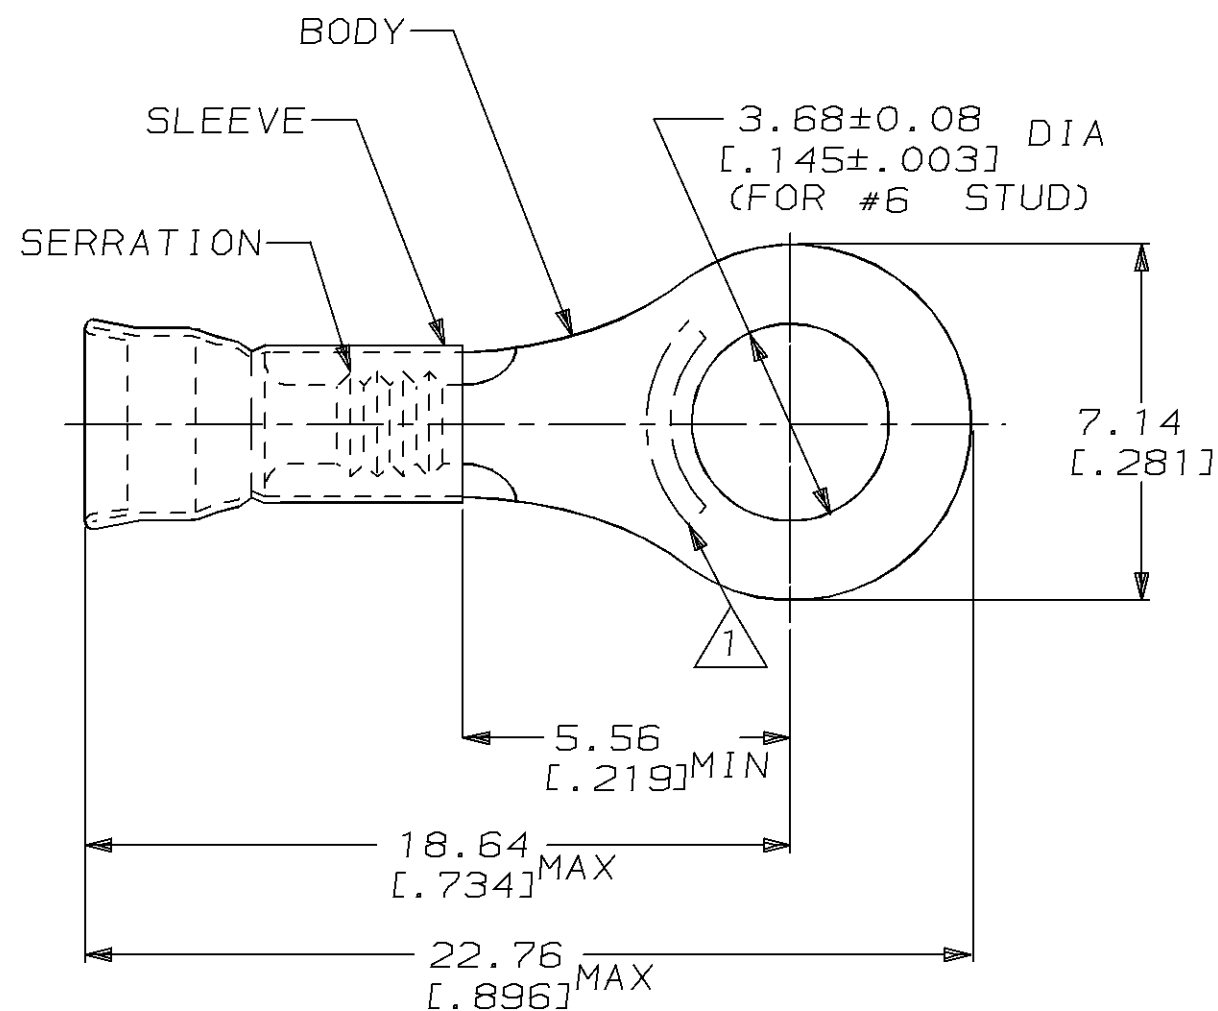
09SEP96

ME

TM

AMP  
WIRE RANGE

UL E13288


LR7189  
Certified12-10 AWG  
SOLID OR STRANDED12-10 AWG  
SOLID OR STRANDED12-10 AWG  
SOLID OR STRANDED

1 STAMP AMP 12-10\* LOCATE APPROX AS SHOWN

2. WIRE INSUL DIA, 3.81-5.84 [.150-.230]

3. TONGUE MATL THK, 1.02±0.05 [.040±.002]

|      |              |            |
|------|--------------|------------|
| 2000 | ONTAPE, REEL | 2-321501-1 |
| 500  | LOOSE PIECE  | 321501     |
| QTY  | PACKAGE TYPE | PART NO    |

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMMAX RECOMMENDED OPERATING  
TEMPERATURE:  
170°C [338°F]THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.  
IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING  
ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.DIMENSIONS:  
mm [in]TOLERANCES UNLESS  
OTHERWISE SPECIFIED:0 PLC ±-  
1 PLC ±-  
2 PLC ±0.20 [.008]  
3 PLC ±-  
4 PLC ±-  
ANGLES ±-MATERIAL  
BODY, CU, SLV, CU PER  
ASTM B152FINISH  
TIN PLATE  
PER MIL-T-10727

|                  |           |         |
|------------------|-----------|---------|
| DWN              | L OLMEDA  | 23JAN95 |
| CHK              | M ELLIS   | 23JAN95 |
| APVD             | S BORTNER | 23JAN95 |
| PRODUCT SPEC     | UL486A    |         |
| APPLICATION SPEC | -         |         |
| WEIGHT           | -         |         |
| CUSTOMER DRAWING |           |         |

AMP AMP Incorporated  
Harrisburg, PA 17105-3608NAME TERMINAL, RING,  
DIAMOND GRIP,  
WIRE SIZE, 12-10 AWG

SIZE A3 CAGE CODE 00779 DRAWING NO C-321501

SCALE 6:1 SHEET 1 OF 1 REV C

FOR ADDITIONAL  
PRODUCT INFORMATION OR  
COPIES OF DRAWINGS  
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER  
1-800-522-6752FOR APPLICATION  
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER  
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

CIRCULAR MIL AREA:  
2.62mm²-6.64mm² [5180-13100]