| FCI P/N (NOTE 1) | LENGTH "A" (NOTE 1) | AGERE COMCODE |
|---|---|---|
| 57610-YXXX-ZZ | XXX | – |
| 57610-M004-WH | XXX | 700017393 |

**CABLE COLOR CODE TABLE**

| ZZ | COLOR |
|---|---|
| | NATURAL |
| WH | WHITE |
| BK | BLACK |
| SL | SLATE |
| GN | GREEN |
| BR | BROWN |
| YE | YELLOW |
| BL | BLUE |
| RD | RED |
| OR | ORANGE |

**TABLE 1**

| ROC | UNDERCUT | PROTRUSION |
|---|---|---|
| 10-12mm | 100nm | 100nm |
| 13-17mm | 75nm | 100nm |
| 18-25mm | 50nm | 100nm |

**SPECIFICATIONS**

| | |
|---|---|
| INSERTION LOSS | 0.2dB MAX |
| RETURN LOSS | 50dB MIN |
| FIBER PROTRUSION | SEE TABLE 1 |
| FIBER UNDERCUT | SEE TABLE 1 |
| APEX OFFSET | 50um MAX |

"A"

FCI
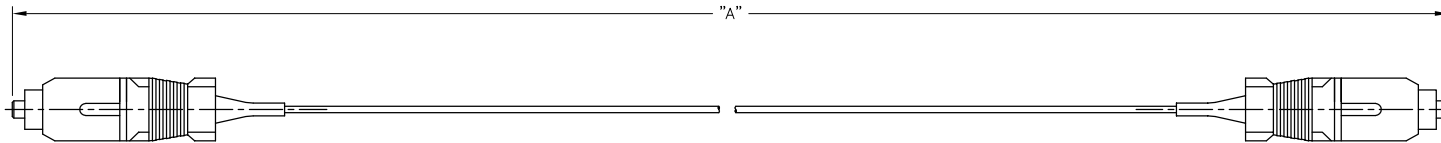
NOTES:
1. PART NUMBER CONSISTS OF DWG NO, A DASH, A SUFFIX=Y,
   A SUFFIX=XXX, A DASH, AND A SUFFIX=ZZ WHERE Y IS THE
   UNIT OF LENGTH (Y=F IS FEET, Y=M IS METERS, Y=C IS CENTIMETERS),
   WHERE XXX IS THE LENGTH "A", AND WHERE ZZ IS THE CABLE COLOR
   CODE (SEE CABLE COLOR CODE TABLE).
   (EX. 57610-F004-YE IS 4FT IN LENGTH WITH A CABLE COLOR OF YELLOW.)
2. CONNECTORS ARE TIA/EIA 604(FOCIS)-3 COMPLIANT.
3. TENSILE TEST: 2.2LB APPLIED AXIALLY FOR 1MIN WITH A 0.5dB MAX
   INSERTION LOSS INCREASE.

| mat'l. code | | | | tolerances unless otherwise specified | | CUSTOMER COPY | | **Electronics** FCI www.fciconnect.com | | |
|---|---|---|---|---|---|---|---|---|---|---|
| ltr | ecn no | dr | date | NOMINALS ONLY | | | | | | |
| A | V11305 | JJK | 4/19/01 | linear | UNLESS NOTED | projection | | title CA,SC-SC,SM,TUNEABLE LTB, TYPE AG | | |
| B | V11313 | JJK | 5/7/01 | | | | | | | |
| C | V11351 | JJK | 5/18/01 | angles | | | | | | |
| D | V11449 | JJK | 8/22/01 | dr | J. KILE | 4/19/01 | INCH | product family FIBER OPTICS | | code – |
| E | V20429 | JJK | 3/1/02 | engr | G. WARNER | 4/19/01 | | size | dwg no | |
| F | V20730 | JRW | 4/25/02 | chr | G. WARNER | 4/20/01 | scale N/A | A4 | 57610 | sheet 1 of 1 |
| | | | | appd | G. WARNER | 4/20/01 | | | | |
| sheet index | revision sheet | | | | | | | cage code 22526 | | |

ACAD