


Socket and terminal strips


AW 127 AG

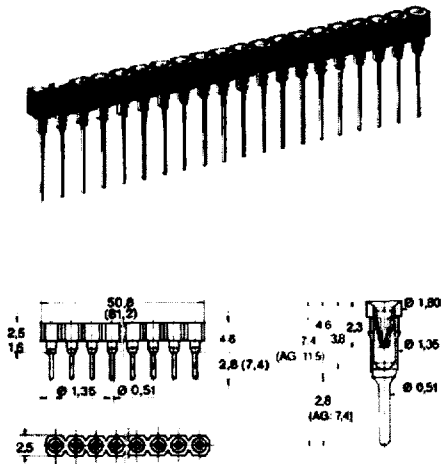

AW-127-20-G¹ AW-127-32-G¹
 AW-127-20-T² AW-127-32-T²
 AW-127AG-20-Z²

AW 127 LP

Low profile



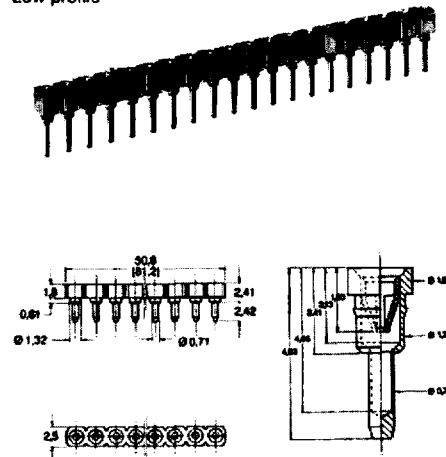


AW-127LP-20-T²
 AW-127LP-32-T²



AP 483



Pitch 2.54 mm

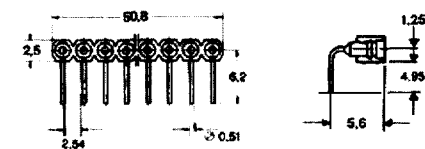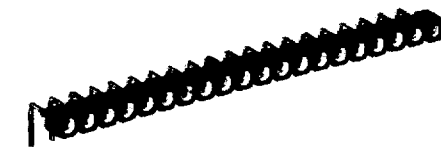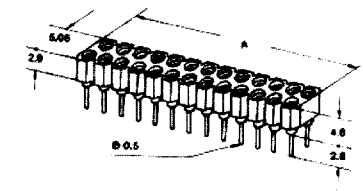

AW-127A-20-Z²

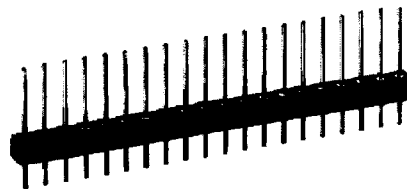

AP-119-20-G¹

Part no.	No. of contacts	Dim. (mm/inch) A
AWD 127/10/Z	10	12,70 0.500
AWD 127/14/Z	14	17,78 0.700
AWD 127/16/Z	16	20,32 0.800
AWD 127/20/Z	20	25,40 1.000
AWD 127/26/Z	26	33,02 1.300
AWD 127/34/Z	34	43,18 1.700
AWD 127/40/Z	40	50,80 2.000
AWD 127/50/Z	50	63,50 2.500
AWD 127/60/Z	60	76,20 3.000
AWD 127/64/Z	64	81,28 3.200

Contacts

Contact spring: copper alloy,
 slit 4 times
 Plating: gold over nickel
 Absolute protection against
 capillary action
 Solder pin: brass

¹ G = Gold over nickel
² Z = Tin over nickel

Mechanical and electrical data
 see page 24

Not shown strip cutter A-CSC 40