

# CLSA Series

Current Sensing Chip Resistor




- AEC-Q200 Compliant
- Resistances from 0.01 to 10hms
- Power Rating to 2 Watt
- Resistance Tolerances to  $\pm 1\%$
- TCR's to  $\pm 100$  ppm/ $^{\circ}\text{C}$
- Alumina Substrate for High Power Dissipation
- Sizes: 0402 / 0603 / 0805 / 1206 / 2010 / 2512

## SPECIFICATIONS

Type	CLSA0402	CLSA0603	CLSA0805	CLSA1206	CLSA2010	CLSA2512
Standard Power Rating (W)	0.0625	0.1	0.125	0.25	0.75	1.0
"High" Power Rating (W)	0.125		0.25	0.5	1.0	2.0
Standard Resistance Range ( $\Omega$ )	0.05 to 1.0	0.02 to 1.0		0.01 to 1.0		
"High" Resistance Range ( $\Omega$ )	0.05 to 1.0					
Temperature Coefficient (depending on ohmic value)	$\pm 200$ to $\pm 400$ ppm	$\pm 200$ to $\pm 600$ ppm $\pm 100$ ppm upon request				
"High" Temperature Coefficient (depending on ohmic value)	$\pm 200$ to $\pm 400$ ppm			$\pm 200$ to $\pm 300$ ppm		
Tolerances	1% / 2% / 5%					
Operating Temperature range	$-55$ to $+155^{\circ}\text{C}$					
Dimensions (LxW) mm [inches]	1.00 x 0.50 [0.04 x 0.02]	1.60 x 0.80 [0.06 x 0.03]	2.00 x 1.25 [0.08 x 0.05]	3.10 x 1.55 [0.12 x 0.06]	5.00 x 2.50 [0.20 x 0.10]	6.30 x 3.10 [0.25 x 0.12]
Packaging (pcs) Tape and Reel	10,000	5,000			4,000	

Power Derating Curve

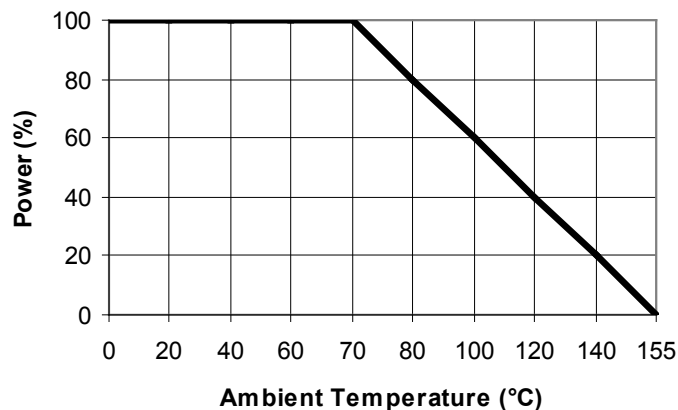

## Ordering Information

Part Description: Part Type - Resistance - Tolerance - TCR - Packaging - High/Standard Rating

Example: CLSA 2512 0.500Ohms 1% 100ppm HP

(Note: If no TCR is specified the highest value will be supplied. Standard Rating will be given if not specified)

### Environmental Characteristics

Test	Requirement	Test Method
Temperature Coefficient of Resistance	As Spec.	-55°C to 125°C, 25°C reference temperature
Short Time Overload	$\pm 0.5\% + 0.05\Omega$	RCWV*2.5 or Max. overload voltage for 5 seconds
Insulation Resistance	$\geq 10G$	Max. overload voltage for 1 minute
Load Life	$\pm 1.0\% + 0.05\Omega$	70 $\pm$ 2°C, Max. working voltage for 1000 hrs with 1.5 hrs "ON" and 0.5 hrs "OFF"
Biased Humidity	$\pm 1.0\% + 0.05\Omega$	1000hrs 85°C/85% RH 10% of operating power
High Temperature Exposure	$\pm 0.5\% + 0.05\Omega$	at +155°C for 1000 hrs
Bending Strength	As Spec.	Bending once for 5 seconds with 3mm
Thermal Shock	$\pm 0.5\% + 0.05\Omega$	-55°C/+155°C. 300 cycles with maximum transfer time of 20 seconds. Dwell time 15 minutes air to air
Solderability	95% min. coverage	245 $\pm$ 5°C for 3 seconds
Resistance to Soldering Heat	$\pm 0.5\% + 0.05\Omega$	260 $\pm$ 5°C for 10 seconds
Voltage Proof	No breakdown or flashover	1.42 times RCWV (RMS) for 1 minute
Leaching	Individual leaching area $\leq 5\%$ Total leaching area $\leq 10\%$	260 $\pm$ 5°C for 30 seconds
Temperature Cycling	$\pm 0.5\% + 0.05\Omega$	-55°C to +125°C, 1000 cycles
Moisture Resistance	$\pm 1.0\% + 0.05\Omega$	24hrs/cycle
Mechanical Shock	$\pm 0.25\% + 0.05\Omega$	Wave form: Tolerance for half sine pulse Peak value of 100g's. Normal Duration (D) is 6
Vibration	$\pm 0.5\% + 0.05\Omega$	5 g's for 20 min., 12 cycles each of 3 orientations, 10-2000 H
ESD	$\pm 1.0\% + 0.05\Omega$	Human body, 2KV
Flame Retardance	No Flame Present	Temperature sensing at 500°C, voltage power subjected to 32VDC current clamped up to 500ADC and decreased in 1.0VDC/hour
Resistance to Solvents	Marking Unsmeared	Add Aqueous wash chemical - OKEM Clean or equivalent. Do not use banned solvents.
Terminal strength	Not broken	Force of 1.8kg for 60 second