
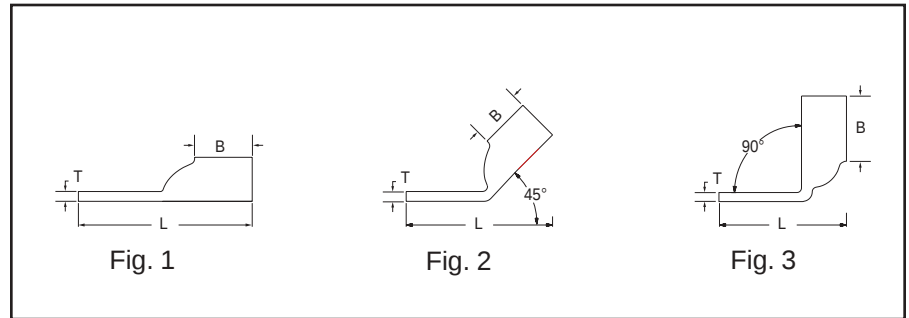


ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL

TYPES YA-L, YA-L-TC

COPPER COMPRESSION
TERMINAL

UL Listed 90° C,
600 Volts to 35 KV ♦

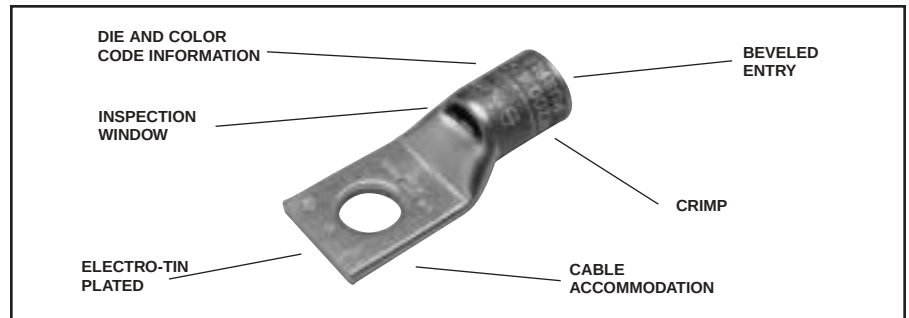

C-9



Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			▲ Installation Tooling							Wire Strip Length	
		*** AWG	MM ²			Dimensions			Dieless (# of crimps)	Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index			
						(B)	(T)	(L)			BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750					
YAV10-45-BOX	1	#14-#10 STR	6	8-10	.38"	.405"	.058"	.92"	Y8MRB-1 (1)	-	-	-	-		7/16"		
YAV10-BOX	1					.405"	.058"	1.02"									
YAV10R-BOX	3					.375"	.058"	.77"									
YAV10R3-BOX	3					1/4"	.47"	.405"								.047"	.83"
YAV10T2-BOX	1	#12-#10 SOL	6	5/16"	.53"	.38"	.047"	1.12"									
YAV10T3-45-BOX	2					1/4"	.47"	.405"								.047"	1.10"
YAV10T3-BOX	1					1/4"	.47"	.405"								.047"	1.10"
YAV10T4-BOX	1					3/8"	.56"	.38"								.047"	1.18"
YA8CL1-BOX	1	#8 AWG	† 10	1/4"	.44"	.44"	.08"	1.26"	Y1MR (1) Y8MRB-1 (1) Y2MR (1) MY29-3 (1) MY29-11 (1) MRC840 (1)	W8CVT (1) W8CRT (1) X8CRT (1)	W8CVT (1) W8CRT (1) X8CRT (1)	U8CRT (1)	Red	49	7/16"		
YA8CL1-45	2					.44"	.08"	1.24"									
YA8CL1-90	3					.80"											
YA8CL2-BOX	1					1.38"											
YA8CL2-45	2	#8 WELD	† 10	5/16"	.52"	.44"	.06"	1.34"									
YA8CL2-90	3					.92"											
YA8CL3-BOX	1					1.51"											
YA8CL3-45	2					1.45"											
YA8CL3-90	3	37/24	† 10	3/8"	.58"	.44"	.06"	1.04"									
YA8CL4-BOX	1					1.76"											
YA8CL4-45	2					1.67"											
YA8CL4-90	3					1.28"											
YA8CL-BOX	1	#6 SOLID	† 10	8-10	.41"	.44"	.08"	1.16"									
YA8CL-45	2					1.16"											
YA8CL-90	3					.71"											
YA6CL-BOX	1					1.18"											
YA6CL-45	2	#6 AWG	† 10	1/4"	.45"	.54"	.08"	1.08"	Y1MR (1) MY29-3 (1) MY29-11 (1) MRC840 (1) Y2MR (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	U5CRT (1)	Blue	7	7/8"		
YA6CL-90	3					.81"											
YA6CL1-BOX	1					.41"	.54"	.09"								.99"	
YA6CL1-45	2					.41"	.54"	.09"								.89"	
YA6CL1-90	3			8-10	.42"	.54"	.09"	.72"									
YA6CL3-BOX	1					1.24"											
YA6CL3-45	2					1.06"											
YA6CL3-90	3					.93"											

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
 ** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.
 *** The MM² conductor sizes listed are the recommendations for Class 2 conductor.

† The MM² conductor size listed is for both Class 2 and Class 5 conductor.
 ▲ See tooling section of this catalog for complete tool and die listings.

♦ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

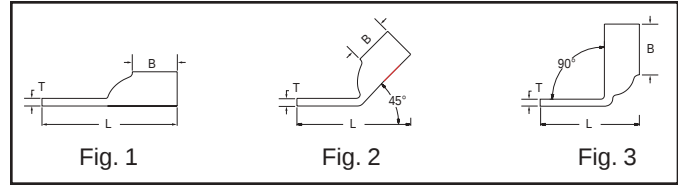

C-10



Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			Dieless (# of crimps)	▲ Installation Tooling						Wire Strip Length					
		AWG	*** MM²			(B)	(T)	(L)		Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index							
											BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750									
YA6CL4-BOX	1	#6 AWG		3/8"	.63"	.54"	.06"	Y1MR (1) MY29-3 (1) MY29-11 (1) MRC840 (1) Y2MR (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	W5CVT (1) W5CRT (1) X5CRT (1) X8CART (1)	U5CRT (1) UBCABT (1)	Blue	7	7/8"							
YA6CL4-45	2														1/2"	.75"	.54"	.12"	1.60"	1.54"	1.30"
YA6CL4-90	3																				
YA6CL6-BOX	1			1/4"	.44"	.81"	.07"														
YA6CL6-45	2																				
YA6CL6-90	3																				
YA5CL-BOX	1	#5 AWG		1/4"	.44"	.81"	.07"	Y1MR (2) MY29-3 (1) MY29-11 (1) MRC840 (1) Y2MR (2) Y644M (1)	W5CVT (1) W5CRT (1) X5CRT (1)	W5CVT (1) W5CRT (1) X5CRT (1)	U5CRT (1)	Blue	7	7/8"							
YA5CL-45	2																				
YA5CL-90	3																				
YA4CL-BOX	1	#4 AWG		1/4"	.50"	.81"	.09"	Y1MR (2) MY29-3 (1) MY29-11 (1) MRC840 (1) Y2MR (2) Y644M (1)	W4CVT (1) W4CRT (1) X4CRT (1)	W4CVT (1) W4CRT (1) X4CRT (1)	U4CRT (1) U6CABT (1)	Gray	8	7/8"							
YA4CL-45	2																				
YA4CL-90	3																				
YA4CL1-BOX	1			8-10	.50"	.81"	.09"								1.58"	1.28"	.75"				
YA4CL1-45	2																				
YA4CL1-90	3																				
YA4CL3-BOX	1			5/16"	.58"	.81"	.08"								1.92"	1.68"	.96"				
YA4CL3-45	2																				
YA4CL3-90	3																				
YA4CL4-BOX	1			3/8"	.58"	.81"	.08"								1.92"	1.68"	1.08"				
YA4CL4-45	2																				
YA4CL4-90	3																				
YA4CL6-BOX	1			1/2"	.71"	.81"	.06"								2.20"	2.02"	1.32"				
YA4CL6-45	2																				
YA4CL6-90	3																				
YA3CL	1			# 3 STR # 2 SOL	25	5/16"	.55"								.88"	.09"	Y1MR (2) MY29-3 (1) MY29-11 (1) MRC840 (1) Y2MR (2) Y644M (1)	W3CRT (1)	W3CRT (1)	U3CRT (1)	White
YA3CL-45	2																				
YA3CL-90	3																				
YA2CL2-BOX	1	#2 AWG	35	1/4"	.61"	.88"	.11"	Y1MR (2) MY29-3 (1) MY29-11 (1) MRC840 (1) Y644M (1)	W2CVT (1) W2CRT (1) X2CRT (1)	W2CVT (1) W2CRT (1) X2CRT (1)	U2CRT (1)	Brown	10	15/16"							
YA2CL2-45	2																				
YA2CL2-90	3																				
YA2CL-BOX	1			5/16"	.61"	.88"	.11"								1.88"	1.55"	.89"				
YA2CL-45	2																				
YA2CL-90	3																				
YA2CL4-BOX	1			3/8"	.61"	.88"	.11"								2.06"	1.74"	1.14"				
YA2CL4-45	2																				
YA2CL4-90	3																				
YA2CL6-BOX	1			1/2"	.73"	.88"	.09"								2.32"	2.17"	1.37"				
YA2CL6-45	2																				
YA2CL6-90	3																				
YA1CL2	1	#1 AWG	50	1/4"	.68"	.88"	.10"	Y1MR (2) MY29-3 (1) MY29-11 (1) MRC840 (1) Y644M (1)	W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	W1CVT (1) W1CRT-1 (1) X1CRT-1 (1)	U1CRT-1 (1) U4CABT (1)	Green	11	15/16"							
YA1CL2-45	2																				
YA1CL2-90	3																				
YA1CL-BOX	1			5/16"	.68"	.88"	.01"								1.94"	1.82"	1.03"				
YA1CL-45	2																				
YA1CL-90	3																				
YA1CL4-BOX	1			3/8"	.68"	.88"	.10"								2.06"	1.95"	1.16"				
YA1CL4-45	2																				
YA1CL4-90	3																				
YA1CL6-BOX	1			1/2"	.73"	.88"	.09"								2.37"	2.22"	1.40"				
YA1CL6-45	2																				
YA1CL6-90	3																				

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

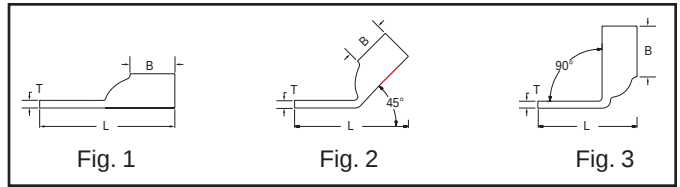

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions		Dieless (# of crimps)	▲ Installation Tooling						Wire Strip Length			
		AWG	*** MM²			(B)	(T)		(L)	Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index				
											BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750						
YA25L2-BOX	1	1/0 AWG		1/4"	.75"	.88"	.12"	MY29-3 (1) MY29-11 (1) MRC840 (2) Y644M (1)	W25VT (2) W25RT (2) X25RT (2)	W25VT (2) W25RT (2) X25RT (2)	U25RT (1) U2CABT (1)	Pink	12	15/16"				
YA25L2-45	2																	
YA25L2-90	3																	
YA25L4-BOX	1			3/8"	.75"	.88"	.12"								2.09"			
YA25L4-45	2																	
YA25L4-90	3																	
YA25L6-BOX	1			1/2"	.75"	.88"	.12"								2.34"			
YA25L6-45	2																	
YA25L6-90	3																	
YA25L-BOX	1			5/16"	.75"	.88"	.12"								1.96"			
YA25L-45	2																	
YA25L-90	3																	
YA26L2-BOX	1	2/0 AWG	70	1/4"	.83"	.94"	.12"	MY29-3 (1) MY29-11 (1) MRC840 (2) Y644M (1)	W26VT (2) W26RT (2) X26RT (2)	W26VT (2) W26RT (2) X26RT (2)	U26RT (1)	Black	13	1"				
YA26L2-45	2																	
YA26L2-90	3																	
YA26L3-BOX	1			5/16"	.83"	.94"	.12"								2.06"			
YA26L3-45	2																	
YA26L3-90	3																	
YA26L-BOX	1			3/8"	.83"	.94"	.12"								2.19"			
YA26L-45	2																	
YA26L-90	3																	
YA26L60	1			3/4"	.96"	.94"	.12"								2.96"			
YA26L60-45	2																	
YA26L60-90	3																	
YA26L6-BOX	1			1/2"	.83"	.94"	.12"								2.44"			
YA26L6-45	2																	
YA26L6-90	3																	
YA26L7-BOX	1			5/8"	.88"	.94"	.11"								2.69"			
YA26L7-45	2																	
YA26L7-90	3																	
YA26LNT516	1			5/16"	.62"	.94"	.13"								2.62"			
YA27L2-BOX	1	3/0 AWG		1/4"	1.00"	1.00"	.13"	W27VT (2) W27RT (2) X27RT (3)	W27VT (2) W27RT (2) X27RT (3)	U27RT (1)	Orange	14	1-1/16"					
YA27L2-45	2																	
YA27L2-90	3																	
YA27L3	1			5/16"	.91"	1.00"	.13"							2.16"				
YA27L3-45	2																	
YA27L3-90	3																	
YA27L4-BOX	1			3/8"	.91"	1.00"	.13"							2.29"				
YA27L4-45	2																	
YA27L4-90	3																	
YA27L-BOX	1			1/2"	.91"	1.00"	.13"							2.54"				
YA27L-45	2																	
YA27L-90	3																	
YA27LNT38				3/8"	.76"	1.00"	.12"											
YA28L17-BOX	1	4/0 AWG		5/8"	1.02"	.88"	.14"	W28VT (2) W28RT (2) X28RT (3)	W28VT (2) W28RT (2) X28RT (3)	U28RT (1)	Purple	15	1-1/8"					
YA28L17-45	2																	
YA28L17-90	3																	
YA28L2-BOX	1			1/4"	1.02"	.88"	.14"							1.96"				
YA28L2-45	2																	



C-11

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
** P-RT die sets for use in Y46 HYPRESS™ only. PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

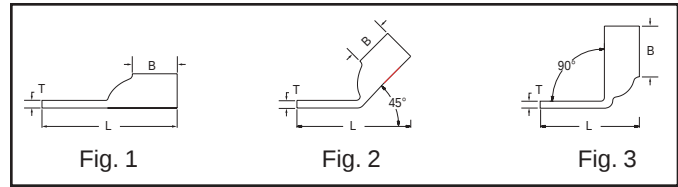

C-12



Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			▲ Installation Tooling						Wire Strip Length
		AWG	*** MM²			(B)	(T)	(L)	Dieless (# of crimps)	Mechanical MD6, OUR840, MD7-34R	Hydraulic		Color Code	Die Index	
											BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750			
YA28L2-90	3	4/0 AWG		1/4"	1.02"	.88"	.14"	1.04"	MY29-3 (1) MY29-11 (1) MRC840 (2) Y644M (1)	W28VT (2) W28RT (2) X28RT (2)	W28VT (2) W28RT (2) X28RT (3)	U28RT (1)	Purple	15	1-1/8"
YA28L3-BOX	1			5/16"	1.02"	.88"	.14"	2.08"							
YA28L3-45	2							2.01"							
YA28L3-90	3			3/8"	1.02"	.88"	.14"	1.16"							
YA28L4-BOX	1							2.21"							
YA28L4-45	2							2.14"							
YA28L4-90	3							1.29"							
YA28L56-BOX	1			3/4"	1.05"	.88"	.13"	2.90"							
YA28L56-45	2							2.81"							
YA28L56-90	3			1/2"	1.02"	.88"	.14"	1.97"							
YA28L-BOX	1							2.46"							
YA28L-45	2			3/8"	.76"	.88"	.14"	2.39"							
YA28L-90	3							1.54"							
YA28LNT38	1			3/8"	.76"	.88"	.16"	2.79"							
YA29L2	1	250 kcmil		1/4"	1.11"	1.06"	.16"	2.17"	MY29-3 (1) MY29-11 (1) Y644M (1)	W29VT (2) X29RT (4)	W29VT (2) W29RT (2) X29RT (4)	U29RT (1)	Yellow	16	1-1/8"
YA29L2-45	2							2.07"							
YA29L2-90	3							1.08"							
YA29L4	1							2.42"							
YA29L4-45	2			3/8"	1.11"	1.06"	.16"	2.32"							
YA29L4-90	3							1.33"							
YA29L7	1							2.30"							
YA29L7-45	2			5/16"	1.11"	1.06"	.16"	2.20"							
YA29L7-90	3							1.20"							
YA29LTC78	1							3.36"							
YA29LTC78-45	2			7/8"	1.11"	1.06"	.14"	3.23"							
YA29LTC78-90	3							2.26"							
YA29LNT38								3/8"							
YA29L-BOX	1			2.67"											
YA29L-45	2			1/2"	1.11"	1.06"	.16"	2.57"							
YA29L-90	3	1.58"													
YA30L	1	300 kcmil	150	1/2"	1.20"	1.03"	.16"	2.69"	Y644M (1)	W30VT (2)	W30VT (2) W30RT (2)	U30RT (2) U28ART (2)	White	17	1-1/16"
YA30L-45	2							2.60"							
YA30L-90	3							1.61"							
YA30L1	1			5/16"	1.20"	1.03"	.16"	2.31"							
YA30L1-45	2							2.22"							
YA30L1-90	3							1.24"							
YA30L24	1			3/8"	1.20"	1.03"	.16"	2.44"							
YA30L24-45	2							2.35"							
YA30L24-90	3							1.36"							
YA30L27	1			7/8"	1.20"	1.03"	.16"	3.37"							
YA30L27-45	2							3.29"							
YA30L27-90	3							2.30"							
YA30L28	1			3/4"	1.20"	1.03"	.16"	3.12"							
YA30L7	1							2.94"							
YA30L7-45	2							2.85"							
YA30L7-90	3	5/8"	1.20"	1.03"	.16"	1.86"									
YA31L	1					350 kcmil	185	1/2"	1.29"	1.06"	.18"	2.75"			
YA31L-45	2											2.75"			
YA31L-90	3	1.65"													

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

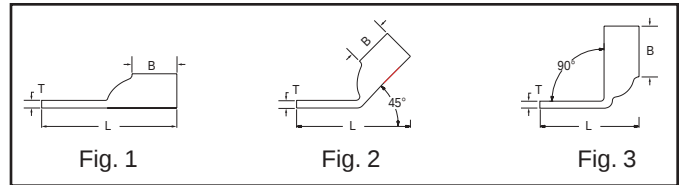

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			▲ Installation Tooling						Wire Strip Length
		AWG	MM²			(B)	(T)	(L)	Dieless (# of crimps)	Mechanical MD6, OUR840, MD7-34R	Hydraulic BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750	Color Code	Die Index	
YA31L11	1	350 kcmil	185	3/8"	1.29"	1.06"	.18"	2.50"	Y644M (1)	W31VT (2)	W31VT (2) W31RT (2)	U31RT (2) U29ART (2)	Red	18	1-3/16"
YA31L11-45	2							2.42"							
YA31L11-90	3							1.40"							
YA31L36	1			7/8"	1.29"	1.06"	.18"	4.02"							
YA31L36-45	2							4.02"							
YA31L36-90	3							3.94"							
YA31L7	1			5/8"	1.29"	1.06"	.18"	3.00"							
YA31L7-45	2							3.00"							
YA31L7-90	3							1.90"							
YA31LNT38				3/8"	96"	1.06"	.18"	3.37"							
YA32L	1	400 kcmil		5/8"	1.38"	1.19"	.19"	3.18"		W32VT (2)	W32VT (2) W32RT (2)	U32RT (2) U30ART (2)	Blue	19	1-1/4"
YA32L-45	2							3.08"							
YA32L-90	3							1.95"							
YA32L1	1			1/2"	1.40"	1.19"	.19"	2.93"							
YA32L1-45	2							2.83"							
YA32L1-90	3							1.70"							
YA32L14	1			3/8"	1.38"	1.19"	.19"	2.68"							
YA32L14-45	2							2.58"							
YA32L14-90	3							1.45"							
YA32LTC78	1			7/8"	1.40"	1.19"	.19"	3.62"							
YA32LTC78-45	2							3.52"							
YA32LTC78-90	3							2.38"							
YA33L	1	450 kcmil		5/8"	1.48"	1.50"	.21"	3.57"		W33VT (2)	W33VT (2) W33RT (2)	U33RT (2)	Gray	326	1-9/16"
YA33L-45	2							3.30"							
YA33L-90	3							2.00"							
YA34L	1	500 kcmil	240	5/8"	1.55"	1.27"	.23"	3.37"		W34VT (2)	W34VT (2) W34RT (2)	U34RT (2) U31ART (2)	Brown	20	1-7/16"
YA34L-45	2							3.30"							
YA34L-90	3							2.03"							
YA34L20	1			1"	1.55"	1.27"	.23"	4.05"							
YA34L20-45	2							3.99"							
YA34L20-90	3							2.72"							
YA34L37	1			3/8"	1.55"	1.27"	.23"	2.87"							
YA34L37-45	2							2.80"							
YA34L37-90	3							1.53"							
YA34L6	1			1/2"	1.55"	1.27"	.23"	3.12"							
YA34L6-45	2							3.05"							
YA34L6-90	3							1.78"							
YA34L8	1			3/4"	1.55"	1.27"	.23"	3.55"							
YA34L8-45	2							3.49"							
YA34L8-90	3							2.22"							
YA34L9	1			7/8"	1.55"	1.27"	.23"	3.80"							
YA34L9-45	2							3.74"							
YA34L9-90	3							2.47"							
YA35L	1	550 kcmil		5/8"	1.65"	1.69"	.25"	3.81"		-	-	U35RT (2)	Yellow	21	1-3/4"
YA35L-45	2							3.67"							
YA35L-90	3							2.08"							
YA36L11	1	600 kcmil	300	1/2"	1.74"	1.38"	.27"	3.29"		-	-	U36RT (2)	Green	22	1-3/4"
YA36L	1							3.72"							
YA36L-45	2			5/8"	1.74"	1.38"	.27"	3.51"							
YA36L-90	3							2.11"							



C-13

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
 ** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
 ▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.

ONE HOLE HYLUG™ CODE CONDUCTOR STANDARD BARREL (Continued)

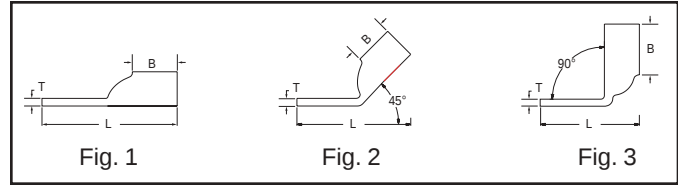

C-14

Catalog Number	Fig #	Conductor		Stud Hole Size	Tongue Width	Figure Dimensions			▲ Installation Tooling						Wire Strip Length			
		AWG	*** MM²			(B)	(T)	(L)	Dieless (# of crimps)	Mechanical	Hydraulic		Color Code	Die Index				
										MD6, OUR840, MD7-34R	BCT500HS, Y500CTHS	Y35, Y39, Y750, Y46*, PAT750						
YA36LTC78	1	600 kcmil	300	7/8"	1.74"	1.38"	.27"	3.97"	Y644M (1)	-	-	U36RT (2) U32ART (2)	Green	22	1-3/4"			
YA36LTC78-45	2							3.95"										
YA36LTC78-90	3							2.55"										
YA37L	1	650 kcmil	5/8"	1.80"	1.39"	.27"	3.57"	-		-	U37RT (2)	Orange	23	1-15/16"				
YA37L-45	2						3.55"											
YA37L-90	3						2.14"											
YA37L1	1	700 kcmil	5/8"	1.84"	1.45"	.27"	3.76"	-		-	U38RT (2)	Pink	400	1-15/16"				
YA38L	1						3.66"											
YA38L-90	2						3.60"											
YA38L-45	3	750 kcmil	5/8"	1.91"	1.42"	.27"	2.15"	-		-	U39RT (2) P39RT (2) **	Black	24	1-15/16"				
YA39L	1						3.67"											
YA39L-45	2						3.61"											
YA39L-90	3						2.17"											
YA39L2	1		7/8"	1.91"	1.42"	.27"	4.10"											
YA39L2-45	2						4.05"											
YA39L2-90	3						2.61"											
YA39L9	1		1-1/4"	1.91"	1.42"	.27"	4.85"											
YA39L9-45	2						4.80"											
YA39L9-90	3						3.36"											
YA39LNT38			3/8"	1.12"	1.42"	.27"	4.70"								-	-	P40RT(3) **	Orange
YA39L6	1	1/2"	1.91"	1.42"	.27"	3.41"												
YA39L6-45	2					3.36"												
YA39L6-90	3					1.92"												
YA40L	1	800 kcmil	400	5/8"	1.98"	1.42"	.30"	3.81"		-	-	P40RT(3) **	Orange	25	1-15/16"			
YA40L-45	2							3.69"										
YA40L-90	3							2.21"										
YA41L	1	850 kcmil	5/8"	2.01"	1.88"	.31"	4.15"	-		-	-	Gold	26	1-15/16"				
YA41L-45	2						4.03"											
YA41L-90	3						2.23"											
YA44L	1	1000 kcmil	500	5/8"	2.19"	1.65"	.33"	4.04"		-	-	P44RT(3) **	White	27	1-15/16"			
YA44L-45	2							4.01"										
YA44L-90	3							2.32"										
YA44L2	1	1250 kcmil	3/4"	2.49"	1.65"	.33"	3.98"	-		-	P45RT(3) **	Yellow	29	2-1/16"				
YA44L23	1						1"								2.19"	1.65"	.33"	4.73"
YA-45L	1						4.68"											
YA-45L-45	2	1300 kcmil	3/4"	2.46"	2.00"	.38"	4.64"	-		-	P45RT(3) **	Yellow	29	2-1/16"				
YA-45L-90	3						2.62"											
YA-453L	1						4.71"											
YA-453L-45	2	1500 kcmil	3/4"	2.53"	2.00"	.39"	4.68"	-		-	-	Orange	30	2-1/16"				
YA-453L-90	3						2.65"											
YA46L	1						4.78"											
YA46L-45	2	1750 kcmil	3/4"	2.69"	2.00"	.40"	4.75"	-		-	P46RT (3) **	Green	31	2-1/16"				
YA46L-90	3						2.71"											
YA47L	1						5.05"											
YA47L-45	2	2000 kcmil	3/4"	2.90"	2.19"	.42"	5.00"	-		-	-	Gray	33	2-1/4"				
YA47L-90	3						2.79"											
YA48L	1						5.19"											
YA48L-45	2	2000 kcmil	3/4"	3.10"	2.25"	.46"	5.19"	-		-	-	Brown	34	2-1/4"				
YA48L-90	3						2.89"											

* Use PUADP-1 adapter with "U" dies in Y46 HYPRESS™.
** P-RT die sets for use in Y46 HYPRESS™ only, PUADP-1 adapter not required.

*** The MM² conductor sizes listed are the recommendations for Class 2 conductor.
▲ See tooling section of this catalog for complete tool and die listings.

◆ For applications greater than 2000 Volts, consult cable manufacturer for voltage stress relief instructions.