




QPL Fixed Coaxial Attenuators

2082 Series

MIL-A-3933/16

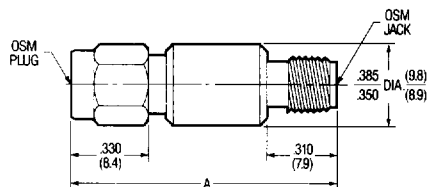

2

Military Part Number	M/A-COM Part Number	Outline	Dim. A Max. Inches (mm)	Attenuation Value (dB) Nom.	Frequency Range (GHz)	Commercial Alternate
-29	2082-4385-12N	2	1.24 (31.5)	11.5	dc - 18.0	—
-30	2082-4137-12N	2	1.24 (31.5)	12	dc - 18.0	2082-6194-12
-31	2082-4385-13N	2	1.24 (31.5)	12.5	dc - 18.0	—
-32	2082-4137-13N	2	1.24 (31.5)	13	dc - 18.0	2082-6194-13
-33	2082-4385-14N	2	1.24 (31.5)	13.5	dc - 18.0	—
-34	2082-4137-14N	2	1.24 (31.5)	14	dc - 18.0	2082-6194-14
-35	2082-4385-15N	2	1.24 (31.5)	14.5	dc - 18.0	—
-36	2082-4137-15N	2	1.24 (31.5)	15	dc - 18.0	2082-6194-15
-37	2082-4385-16N	2	1.24 (31.5)	15.5	dc - 18.0	—
-38	2082-4137-16N	2	1.24 (31.5)	16	dc - 18.0	2082-6194-16
-39	2082-4385-17N	2	1.24 (31.5)	16.5	dc - 18.0	—
-40	2082-4137-17N	2	1.24 (31.5)	17	dc - 18.0	2082-6194-17
-41	2082-4385-18N	2	1.24 (31.5)	17.5	dc - 18.0	—
-42	2082-4137-18N	2	1.24 (31.5)	18	dc - 18.0	2082-6194-18
-43	2082-4385-19N	2	1.24 (31.5)	18.5	dc - 18.0	—
-44	2082-4137-19N	2	1.24 (31.5)	19	dc - 18.0	2082-6194-19
-45	2082-4385-20N	2	1.24 (31.5)	19.5	dc - 18.0	—
-46	2082-4385-21N	2	1.24 (31.5)	20.5	dc - 18.0	—
-47	2082-4137-21N	2	1.24 (31.5)	21	dc - 18.0	2082-6195-21
-48	2082-4385-22N	2	1.24 (31.5)	21.5	dc - 18.0	—
-49	2082-4137-22N	2	1.24 (31.5)	22	dc - 18.0	2082-6195-22
-50	2082-4385-23N	2	1.24 (31.5)	22.5	dc - 18.0	—
-51	2082-4137-23N	2	1.24 (31.5)	23	dc - 18.0	2082-6195-23
-52	2082-4385-24N	2	1.24 (31.5)	23.5	dc - 18.0	—
-53	2082-4137-24N	2	1.24 (31.5)	24	dc - 18.0	2082-6195-24
-54	2082-4385-25N	2	1.24 (31.5)	24.5	dc - 18.0	—
-55	2082-4137-25N	2	1.24 (31.5)	25	dc - 18.0	2082-6195-25
-56	2082-4137-28N	2	1.24 (31.5)	28	dc - 18.0	2082-6195-28

M/A-COM part number reflects non-screened unit. For screened unit, change "N" to "S."

Specifications Subject to Change Without Notice.

M/A-COM Inc. ■ 1011 Pawtucket Boulevard, Lowell, MA 01853 USA

■ Telephone: 800-366-2266