
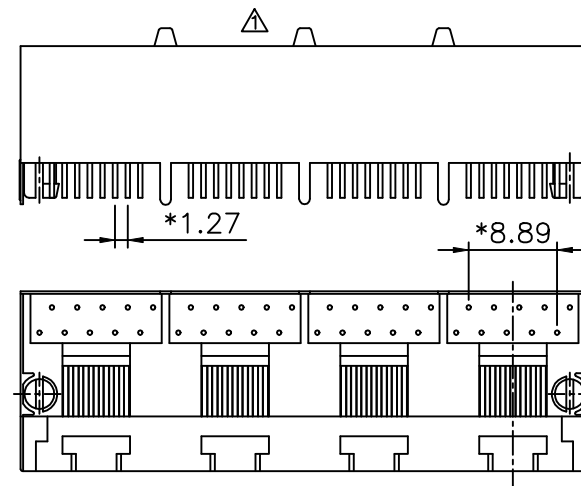
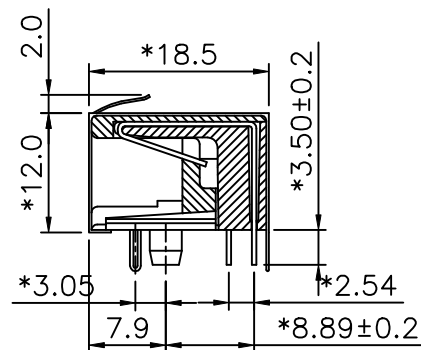


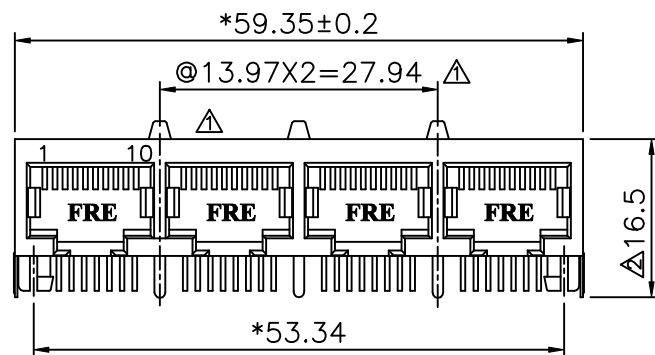

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD
1		MODIFY DRAWING	LIUXIN	
2		MODIFY P/N	ANKLE	

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 40 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
- OPERATION: 0°C TO 70°C .

MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.


PART NUMBER: E560X-XXC06X

8- 8 CONTACTS
1-10 CONTACTS

1- 3u" 2- 6u"
3-15u" 4-30u"
5-50u" 6-Pd 20u"

SHIELD :
0- TIN
4- NICKEL

A- FRONT PEG 3.05 WITH 1 GROUNDING TABS
B- FRONT PEG 3.05 WITH 3 GROUNDING TABS

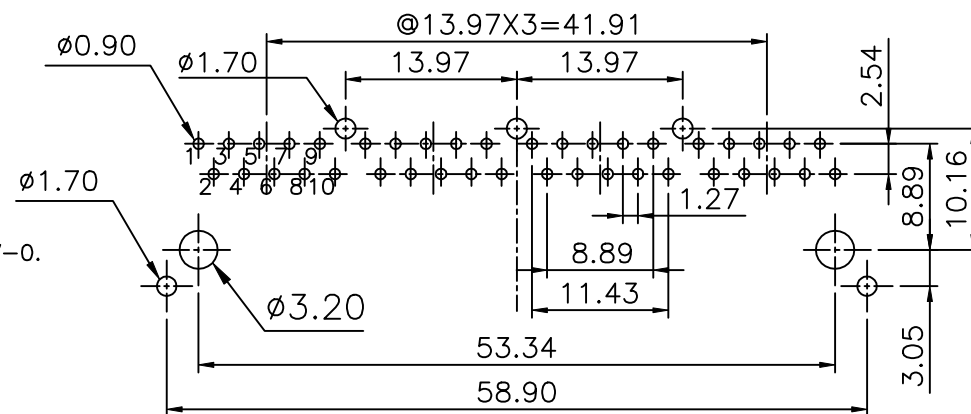

PC Board Layout Component Side Shown

DETACHED LISTS	 MM (INCH)		DFTO: TONY	DATE 5/21/97	FULL RISE ELECTRONIC CO., LTD	
	TOLERANCES EXCEPT AS NOTED		CHKD: ASHELLY	DATE 2006/2/14		
			MFO	DATE		
			APPLV: LUSHENG	DATE 2006/2/14		
	MM .0 ±0.20 .00 ±0.15 .000 ±0.075				TITLE	
	ANGLES ±		MATERIAL :		11.5 SIDE ENTRY PCB GANG JACK 10P	
			QT'Y :		DRAWING NO. GE563118	
	THIRD ANGLE PROJECTION		FINISH :		/PART NO. SEE NOTE	
			SCALE : 1.25:1		SIZE A3	
			DO NOT SCALE DRAWING		REV 2	
				SHEET X OF Y		