


GRS Splice Connectors

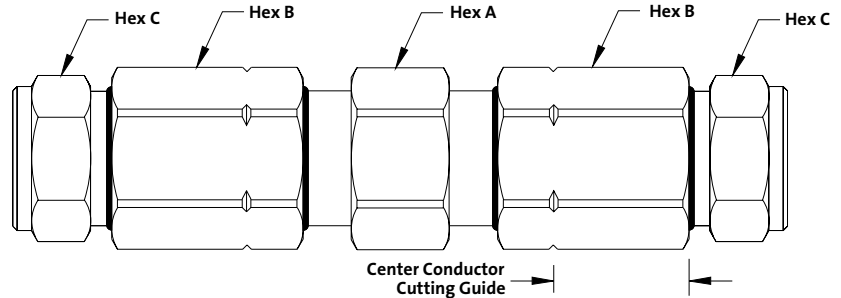

CommScope P-3 Times Fiber T-10

Cable Series	Part Number	Center Conductor	Outer Conductor	Body Hex (A)	Main Nut Hex (B)	Back Nut Hex (C)
.412	GRS-412-SP-DU-01	.092	.412	15/16	1	15/16
.500	GRS-500-SP-DU-03	.109	.500	1-1/8	1-1/8	1
.625	GRS-625-SP-DU-02	.137	.625	1-1/4	1-1/4	1-1/8
.750	GRS-750-SP-DU-01	.167	.750	1-3/8	1-3/8	1-1/4
.875	GRS-875-SP-DU-02	.194	.875	1-3/8	1-3/8	1-3/8
1.000	GRS-1000-SP-DU-01	.220	1.000	1-3/8	1-5/8 ϕ , 1-1/2 flats	1-1/2

CommScope QR

.320 (7C)	GRS-320-SP-QR	.071	.320	15/16	1	1
.540	GRS-540-SP-QRP***	.124	.540	1-1/4	1-1/4	1-1/4
.715	GRS-715-SP-QRP***	.166	.715	1-5/16	1-5/16	1-5/16
.860	GRS-860-SP-QRP***	.203	.860	1-7/16	1-1/2	1-1/2
1.125	GRS-1125-SP-QR	.263	1.125	Requires 2 Hook Type Spanner Wrenches (P/N SW-2)		

Times Fiber TX-10

.565	GRS-565-SP-TX	.129	.565	1-1/4	1-1/4	1-1/8
.700	GRS-700-SP-TX	.165	.700	1-5/16	1-5/16	1-5/16
.840	GRS-840-SP-TX	.194	.840	1-3/8	1-1/2	1-1/2
1.160	GRS-1160-SP-TX	.269	1.160	Requires 2 Hook Type Spanner Wrenches (P/N SW-2)		

Trilogy MC2

.440	GRS-440-SP-MC2	.105	.450	1-1/8	1-1/8	1
.500	GRS-500-SP-MC2	.123	.510	1-1/8	1-1/8	1
.650	GRS-650-SP-MC2	.156	.640	1-5/16	1-5/16	1-5/16
.750	GRS-750-SP-MC2	.185	.760	1-3/8	1-3/8	1-1/4
1.000	GRS-1000-SP-MC2	.248	1.015	1-1/2	1-3/4 ϕ , 1-5/8 flats	1-1/2

Early Generations See Cable Group Listings in Reference Section of this Catalog

.412 Group A	GRS-412-SP-A-01	.080	.412	13/16	1	15/16
.412 Group CX	GRS-412-SP-CX	.080	.482*	15/16	1-1/8	1
.500 Group C	GRS-500-SP-A-01	.100	.500	15/16	1-1/8	1
.500 Group D	GRS-500-SP-DU-01	.109	.500	1-1/8	1-1/8	1
.500 Group E	GRS-500-SP-DU-02	.109	.500	1-1/8	1-1/8	1
.500 Group CX	GRS-500-SP-CX	.110	.571*	1-1/8	1-1/4	1-1/8
.625 Group CX	GRS-625-SP-CX	.137	.693*	1-1/4	1-3/8	1-1/4
.750 Group G	GRS-750-SP-A-01	.148	.750	1-1/8	1-3/8	1-1/4
.750 Group H	GRS-750-SP-DU-03	.167	.750	1-3/8	1-3/8	1-1/4
.750 Group J	GRS-750-SP-FD-04	.176	.750	1-3/8	1-3/8	1-1/4
.750 Group CX	GRS-750-SP-CX	.169	.816*	1-3/8	1-1/2 ϕ , 1-7/16 flats	1-1/4
.875 Group CX	GRS-875-SP-CX	.194	.947*	1-3/8	1-5/8 ϕ , 1-1/2 flats	1-1/2
1.000 Group O	GRS-1000-SP-A-01	.193	1.000	1-3/8	1-5/8 ϕ , 1-1/2 flats	1-1/2
1.000 Group N	GRS-1000-SP-FD-01	.236	1.000	1-1/2	1-3/4 ϕ , 1-5/8 flats	1-1/2

*Indicates diameter over outer jacket

***Incorporates a non-metallic support sleeve