


.125" (3,18mm) Power Connector




Standard .125"

- UL File No. E-29179
CSA File No. LR-19980
- Up to 20 amperes per circuit
- Positive lock (2 & 12 circuit)
- Accommodates 10-18 AWG wire
- 250 volt rating*
- 2, 6 & 12 circuit sizes. Contact factory for other circuit sizes

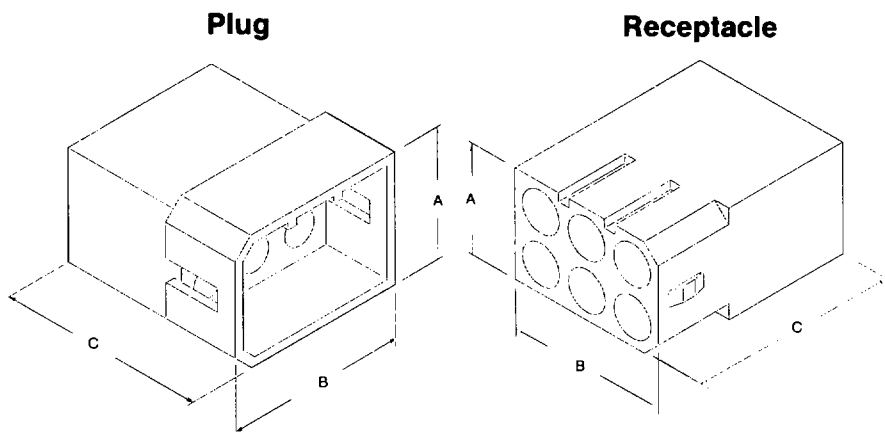

Mounting Hole Detail

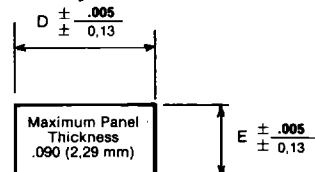

Mounting Hole Detail

Housings

Ordering Information (Order Terminals on Page 26K of this Catalog)

inches
mm

	Plug	Plug	Plug
Ckt. I.D. Shown is Mating Side of Receptacle; Wire Side of Plug			
Series-Circuit Size	4306-2	4154-6	2201-12
Amperes/Circuit (Max)*	20	15	12
Voltage Rating (Max)*	250	250	250
RECEPTACLE Order No.			
Panel Mount	03-12-1021	03-12-1061	03-12-1121
Free Hanging	03-12-1022	03-12-1062	03-12-1122
Dimension A	.62 (15,7)	.55 (13,97)	1.20 (30,5)
B	.30 (7,6)	.81 (20,57)	.74 (18,8)
C	1.02 (25,9)	1.06 (26,9)	1.06 (26,9)
Panel D	.778 (19,76)	.712 (18,08)	1.36 (34,54)
Cutout E	.375 (9,52)	.878 (22,23)	.81 (20,57)
PLUG Order No.			
Panel Mount	03-12-2021	03-12-2061	03-12-2121
Free Hanging	03-12-2022	03-12-2062	03-12-2122
Dimension A	.72 (18,2)	.91 (23,1)	1.30 (33,0)
B	.40 (10,2)	.65 (16,5)	.84 (21,3)
C	.98 (24,9)	1.00 (25,4)	1.00 (25,4)
Panel D	.878 (22,30)	.815 (20,70)	1.46 (37,80)
Cutout E	.432 (10,97)	.960 (24,38)	.855 (21,72)

NOTES: *Rating is based on fully loaded housings

K