

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 508)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOSET UL94V0

-CONTACT MATERIAL: BRASS
GOLD OVER NICKEL

-ACCESSORIES: BRASS
Cadmium plated, yellow passivation

-SHELLS: STEEL
Cadmium plated, yellow passivation

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 7.5A

-CONTACT RESISTANCE: <= 7.3 m ohms

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/155/56

TEMPERATURE RANGE -55°C TO +155°C

DAMP HEAT STEADY STATE 56 DAYS

SALT SPRAY 48 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum

- Female screw : 0.5 N.m minimum

Series

DBML25S043N

Shell size: **E A B C D**
see sheet 2

Front accessory definition
see sheet 2

Blank : without accessory

F : floating mounting

L : threaded insert M3

O : threaded insert UNC 4-40

V : female screw UNC 4-40

Contact number (see sheet 2)

9,15,25,37,50

Contacts



S : Socket

Plating

Blank : solder bucket 500 matings/unmatings

043 : solder bucket 500 matings/unmatings
for harsh environment


Obligatory for HE508




25 WAY for Example

rev	ecn no	dr	date
A	LS06-0174	MPE	2006/11/14
B	LS07-0273	MPE	2007/10/30
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface	-	tolerance std	projection	mm	
		ISO 1302	✓	ISO 406	ISO 1101		
		TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	M PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	A2
Eng	P LEGARE	2006/11/14	LINEAR	0.XX	±0.1	Scale	2:1
Chr	P LEGARE	2006/11/14	0° ±2°	0.XXX	±0.05	ECN	LS07-0273
Appr	P LEGARE	2006/11/14	Product family	-			
						Spec ref	

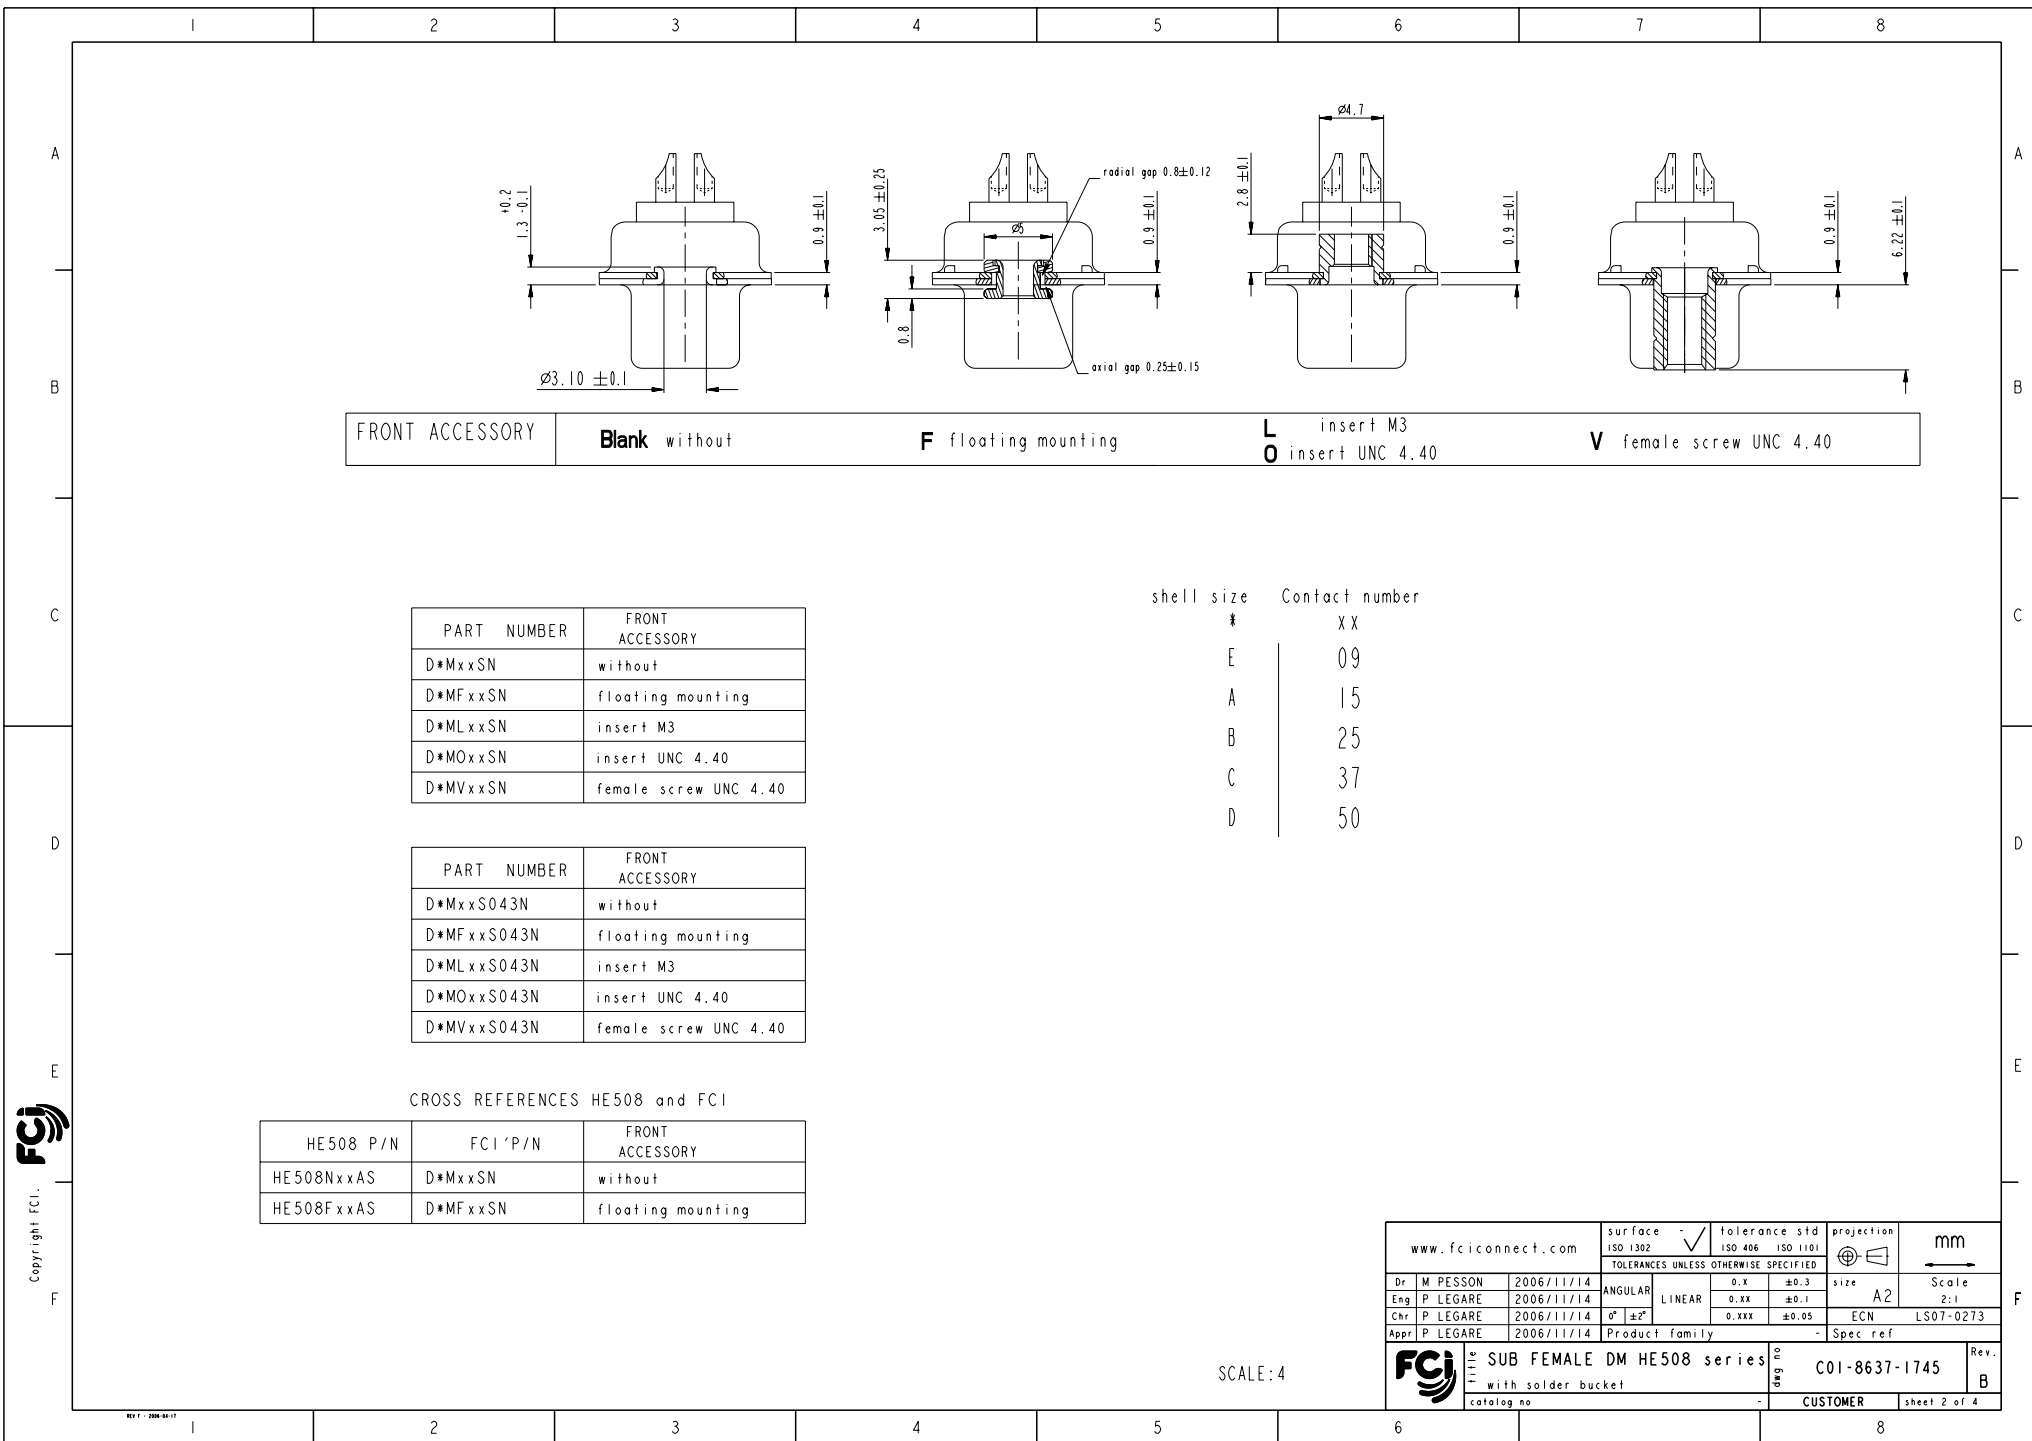


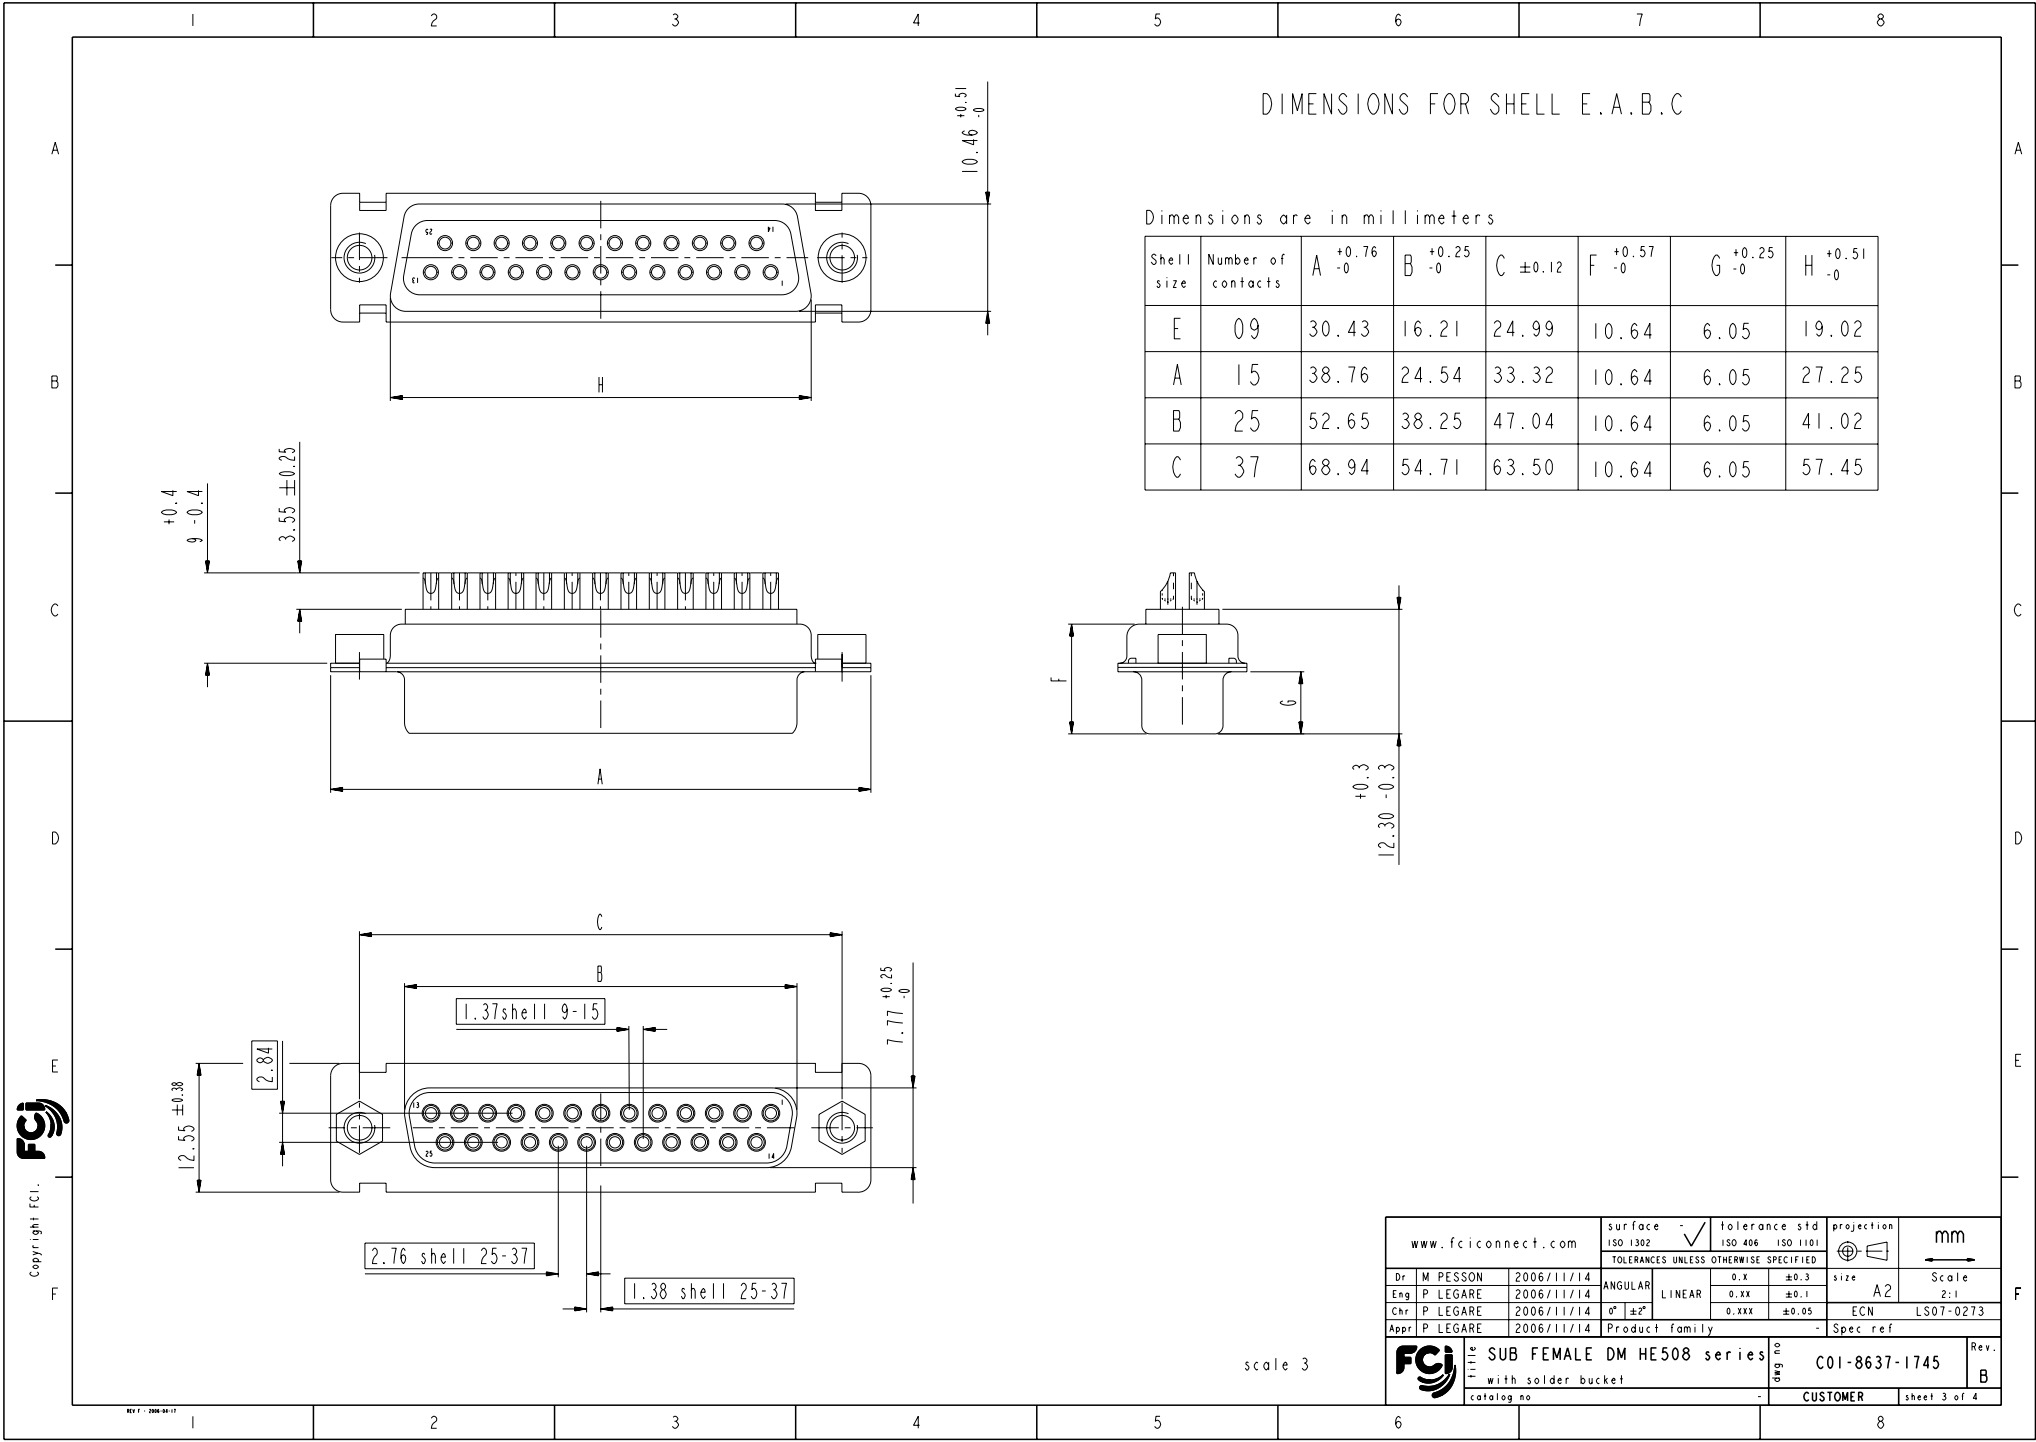

DIMENSIONS FOR SHELL E.A.B.C

Dimensions are in millimeters



Shell size	Number of contacts	A ^{+0.76 -0}	B ^{+0.25 -0}	C ^{±0.12}	F ^{+0.57 -0}	G ^{+0.25 -0}	H ^{+0.51 -0}
E	09	30.43	16.21	24.99	10.64	6.05	19.02
A	15	38.76	24.54	33.32	10.64	6.05	27.25
B	25	52.65	38.25	47.04	10.64	6.05	41.02
C	37	68.94	54.71	63.50	10.64	6.05	57.45

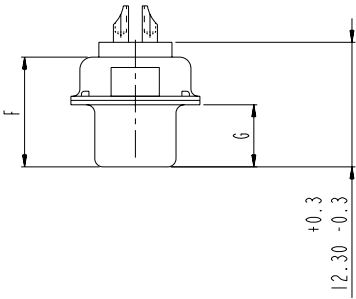

scale 3

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406	projection ISO 1101	mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2006/11/14	ANGULAR	0.X	±0.3	size A2
Eng	P LEGARE	2006/11/14	LINEAR	0.XX	±0.1	Scale 2:1
Chr	P LEGARE	2006/11/14	0° ±2°	0.XXX	±0.05	ECN LS07-0273
Appr	P LEGARE	2006/11/14	Product family	Spec ref		
FCI		SUB FEMALE DM HE508 series		deg no	C01-8637-1745	Rev. B
		with solder bucket		catalog no	CUSTOMER	sheet 3 of 4

DIMENSIONS FOR SHELL SIZE D (50 CONTACTS)

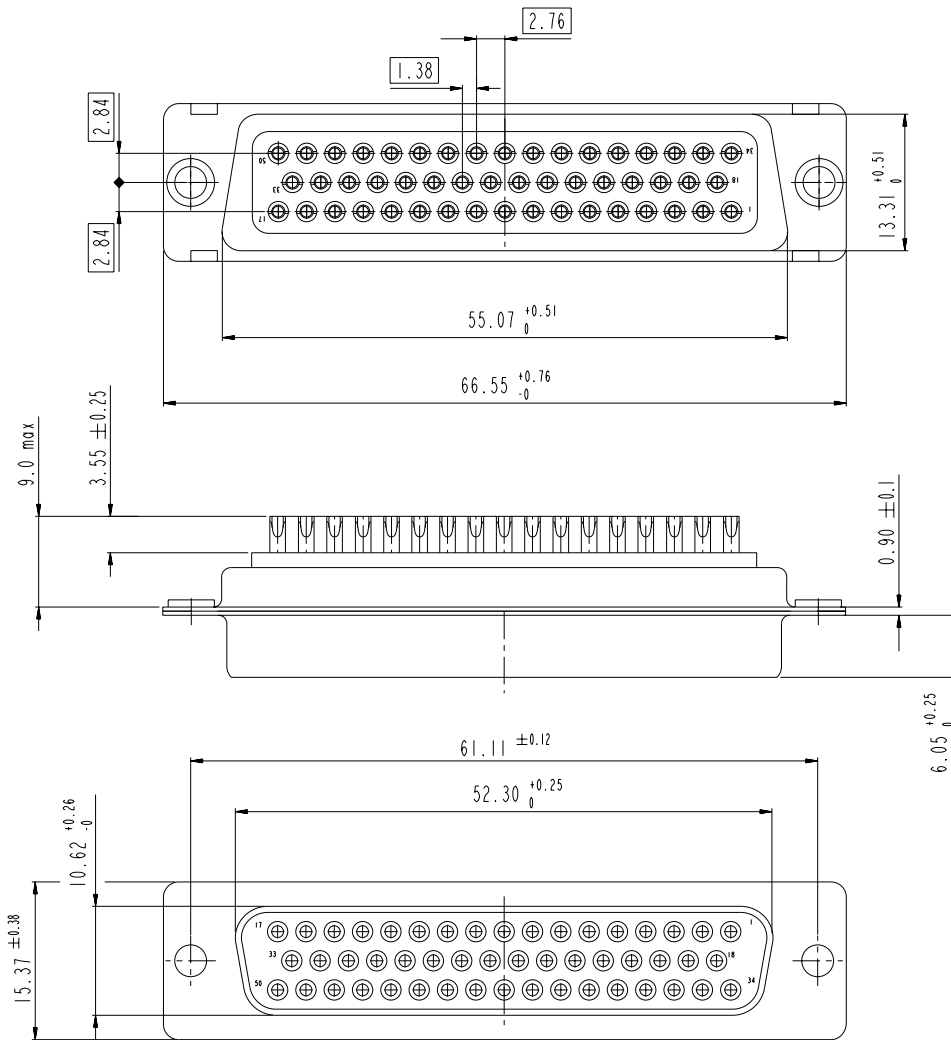

scale 3

www.fciconnect.com		surface	ISO 1302	tolerance std	ISO 406	ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED						
Dr	M PESSON	2006/11/14	ANGULAR	0.X	±0.3	size	A2	Scale
Eng	P LEGARE	2006/11/14	LINEAR	0.XX	±0.1			2:1
Chr	P LEGARE	2006/11/14	0° ±2°	0.XXX	±0.05	ECN	LS07-0273	
Appr	P LEGARE	2006/11/14	Product family			Spec ref		
Title		SUB FEMALE DM HE508 series		dwg no		C01-8637-1745		Rev.
with solder bucket								B
catalog no				CUSTOMER		sheet 4 of 4		