
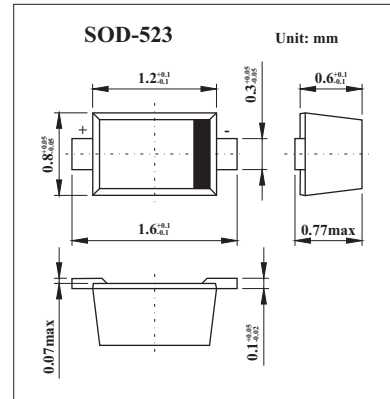


# ESD5Z3.3

## Features

- Peak Power up to 200 Watts @ 8 x 20  $\mu$ s Pulse
- Low Leakage
- Response Time is Typically < 1 ns
- ESD Rating of Class 3 (> 16 kV) per Human Body Model



## Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
ESD Voltage			
	Per Human Body Model	16	KV
	Per Machine Model	400	V
Electrostatic discharge			
	IEC61000-4-2 Air discharge	30	KV
	IEC61000-4-2 Contact Air discharge	30	
Electrostatic discharge			
IEC61000-4-4		40	A
Total Power Dissipation on FR-5 Board*1, @ $T_a = 25^\circ\text{C}$	$P_D$	100	mW
Junction Temperature Range	$T_L$	260(10s)	$^\circ\text{C}$
Lead Solder Temperature -Maximum	$T_J$	150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$

\*1 FR-5 = 1.0 X 0.75 X 0.62 in.

## Electrical Characteristics ( $T_a = 25^\circ\text{C}$ unless otherwise noted, $V_F = 0.9\text{ V Max.}$ @ $I_F = 10\text{ mA}$ for all types)

Device	$V_{RWM}(V)$	$I_R(\mu A)$ @ $V_{RWM}$	$V_{BR}(V)$ @ $I_T^*2$	$I_T$	$V_C(V)^*1$ @ $I_{PP}=5.0A$	$V_C(V)^*1$ @ Max $I_{PP}$	$I_{PP}(A)^*1$	$P_{PK}(W)^*1$	$C(pF)$
	Max	Max	Min	mA	Typ	Max	Max	Max	Typ
ESD5Z3.3	3.3	0.05	5.0	1.0	8.4	14.1	11.2	158	105

\* 1. Surge current waveform per Fig.1

2.  $V_{BR}$  is measured with a pulse test current  $I_T$  at an ambient temperature of  $25^\circ\text{C}$ .

## Marking

Marking	ZE
---------	----

# ESD5Z3.3

■ Typical Characteristics

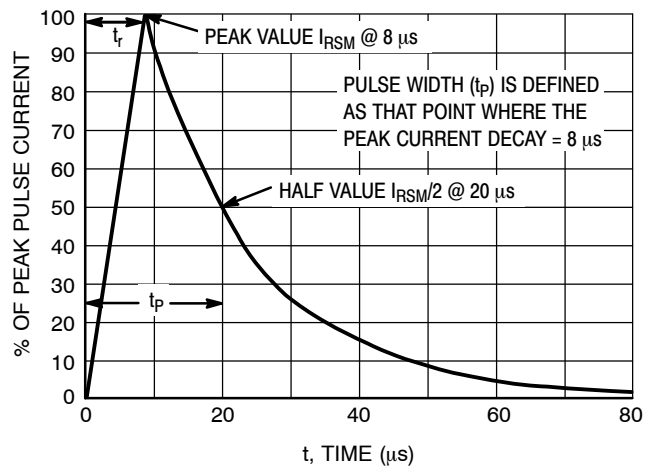
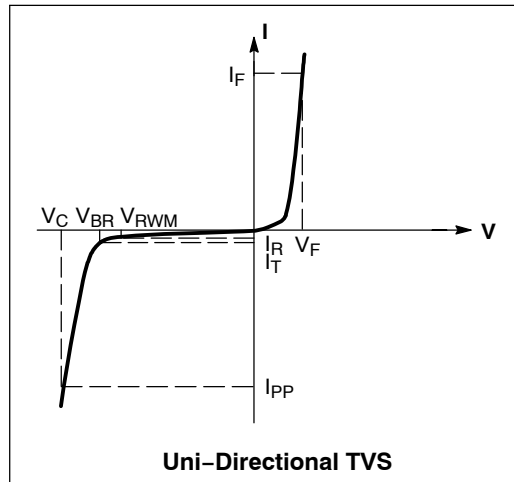


Figure 1. 8 x 20 μs Pulse Waveform