

ASI CC DIST FCAB M12

Order No.: 2741309

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2741309>

Connection element, flat-ribbon cable to M12 connector, for AS-i modules

Commercial data

EAN	4017918190422
Pack	1 pcs.
Customs tariff	85369010
Weight/Piece	0.0178 KG
Catalog page information	Page 187 (AX-2007)

Product notes

WEEE/RoHS-compliant since:
08/01/2005



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

External sheath

External diameter max.	8 mm
External diameter min.	6 mm

Mechanical properties

Ambient temperature (operation)	-20 °C ... 70 °C
---------------------------------	------------------

Ambient temperature (storage/transport)	-20 °C ... 70 °C
---	------------------

Accessories


Item	Designation	Description
General		
1555680	SAC-4P-MS/ 0,3-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket M12 SPEEDCON, length: 0.3 m
1555693	SAC-4P-MS/ 0,5-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket M12 SPEEDCON, length: 0.5 m
1555703	SAC-4P-MS/ 1,0-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket M12 SPEEDCON, length: 1 m
1555716	SAC-4P-MS/ 2,0-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket M12 SPEEDCON, length: 2 m
1555729	SAC-4P-MS/ 5,0-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket M12 SPEEDCON, length: 5 m
1555732	SAC-4P-MS/10,0-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket, M12 SPEEDCON, length: 10 m
1555745	SAC-4P-MS/15,0-186/FS SCO	Power cable, 4-pos., PUR/PVC black, straight connector M12 SPEEDCON on straight socket, M12 SPEEDCON, length: 15 m
1205150	SZK PH1	Screwdriver, suitable for Phillips screws Phillips-Recess, size: 1

Protection and sealing elements

1680539	PROT-M12	An M12 screw plug for the unoccupied M12 sockets of the sensor/ actuator cable, boxes and flush-type connectors
1553129	PROT-MS SCO	M12 screw plug with SPEEDCON quick locking for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors

Drawings

Schematic diagram

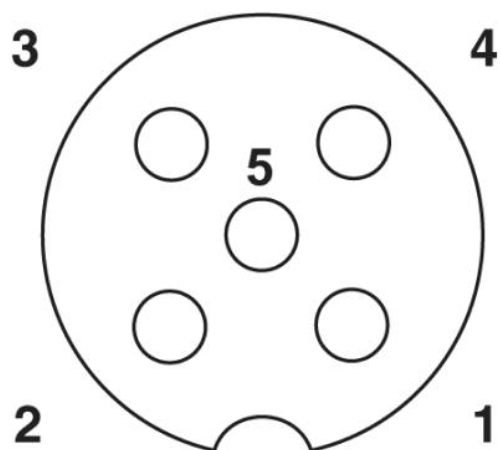

Pin assignment M12, PIN 1: AS-i +, PIN 3: AS-i -, PIN 2,4,5: Not used

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>



© 2009 Phoenix Contact
Technical modifications reserved;