


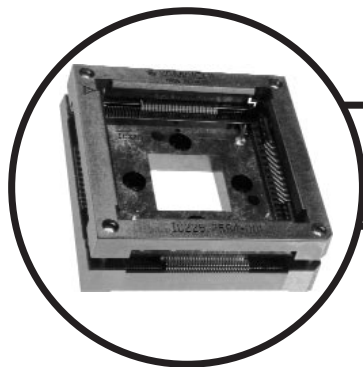

MCR (Molded Carrier Ring)

IC225 Series

Characteristics

Insulation Resistance: 1,000MΩ minimum at 500 VDC
 Withstanding Voltage: 500 VAC for 1 minute
 Contact Resistance: 30mΩ max. at 10mA/20mV (Initial)
 Operating Temperature: -40°C ~ +170°C

Material

Insulator: PEI (Glass Filled)
 Contact: Beryllium Copper
 Plating: Gold over Nickel

IC225- 256 4- 001 *- *

Socket Series

No. of Leads

Contact Direction

Design No.

Positioning Pin

N: Without Positioning Pin

No Mark: With Positioning Pin



Protection Key

K: High (For Protection)

No Mark: Low

Depopulated Versions Available

Quad Flat
Packages

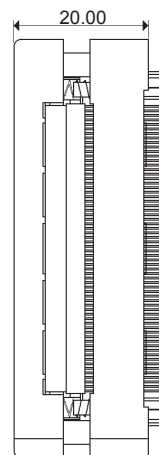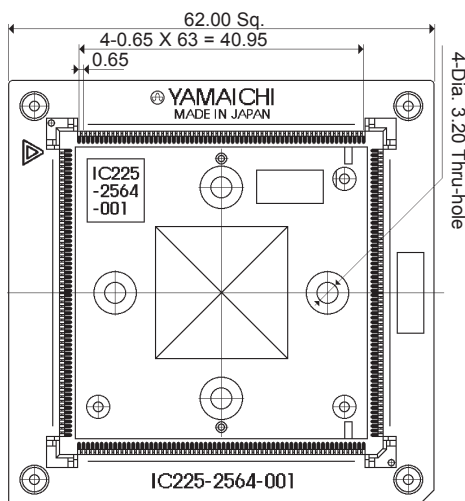

Test Pitch	Size	Variation	Notes
0.65mm	46 x 46	AB	Jedec MO-094