



DATA SHEET

SEMICONDUCTOR

MZ2V0~MZ56V

500 mW DO-34 Hermetically Sealed Glass Zener Voltage Regulators



AXIAL LEAD
DO34

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Value	Units
Power Dissipation	500	mW
Storage Temperature Range	-65 to +200	$^\circ\text{C}$
Operating Junction Temperature	+200	$^\circ\text{C}$
Lead Temperature (1/16" from case for 10 seconds)	+230	$^\circ\text{C}$


These ratings are limiting values above which the serviceability of the diode may be impaired.

DEVICE MARKING DIAGRAM



Specification Features:

- Zener Voltage Range 2.0 to 56 Volts
- DO-34 Package (JEDEC DO-204)
- Through-Hole Device Type Mounting
- Hermetically Sealed Glass
- Compression Bonded Construction
- All external surfaces are corrosion resistant and leads are readily solderable
- Cathode indicated by polarity band

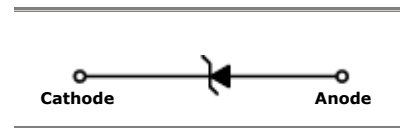

ELECTRICAL SYMBOL

Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Device Type	$V_Z @ I_{ZT}$ (Volts) Nominal	I_{ZT} (mA)	$Z_{ZT} @ I_{ZT}$ (Ω) Max	$I_R @ V_R$ (μA) Max	V_R (Volts)
MZ2V0	2.0	5	100	120	0.5
MZ2V2	2.2	5	100	120	0.7
MZ2V4	2.4	5	100	120	1
MZ2V7	2.7	5	110	100	1
MZ3V0	3.0	5	120	50	1
MZ3V3	3.3	5	120	20	1
MZ3V6	3.6	5	100	10	1
MZ3V9	3.9	5	100	5	1
MZ4V3	4.3	5	100	5	1
MZ4V7	4.7	5	80	5	1
MZ5V1	5.1	5	80	5	1.5
MZ5V6	5.6	5	60	5	2.5
MZ6V2	6.2	5	60	5	3
MZ6V8	6.8	5	20	2	3.5
MZ7V5	7.5	5	20	0.5	4
MZ8V2	8.2	5	20	0.5	5
MZ9V1	9.1	5	25	0.5	6
MZ10V	10	5	30	0.2	7
MZ11V	11	5	30	0.2	8
MZ12V	12	5	30	0.2	9
MZ13V	13	5	35	0.2	10
MZ15V	15	5	40	0.2	11

MZ2V0~MZ56V

Electrical Characteristics T_A = 25°C unless otherwise noted

Device Type	V _Z @ I _{ZT} (Volts) Nominal	I _{ZT} (mA)	Z _{ZT} @ I _{ZT} (Ω) Max	I _R @ V _R (μA) Max	V _R (Volts)
MZ16V	16	5	40	0.2	12
MZ18V	18	5	45	0.2	13
MZ20V	20	5	45	0.2	15
MZ22V	22	5	30	0.2	17
MZ24V	24	5	35	0.2	19
MZ27V	27	5	45	0.2	21
MZ30V	30	5	55	0.2	23
MZ33V	33	5	65	0.2	25
MZ36V	36	5	75	0.2	27
MZ39V	39	5	85	0.2	30
MZ43V	43	5	90	0.2	33
MZ47V	47	5	90	0.2	36
MZ51V	51	5	110	0.2	39
MZ56V	56	5	110	0.2	43

V_F Forward Voltage = 1.2 V Maximum @ I_F = 200 mA for all types

Notes:

- The type numbers listed have zener voltage min/max limits as shown and have a standard tolerance on the nominal zener voltage of 5%.
- For detailed information on price, availability and delivery of nominal zener voltages between the voltages shown and tighter voltage tolerances, contact your nearest YFElectronics representative.
- The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK}.

Electrical Symbol Definition

Symbol	Parameter
V _Z	Reverse Zener Voltage @ I _{ZT}
I _{ZT}	Reverse Current
Z _{ZT}	Maximum Zener Impedance @ I _{ZT}
I _{ZK}	Reverse Current
Z _{ZK}	Maximum Zener Impedance @ I _{ZK}
I _R	Reverse Leakage Current @ V _R
V _R	Breakdown Voltage
I _F	Forward Current
V _F	Forward Voltage @ I _F

Typical Characteristics

