



TYPE QN-FF AND QN-FM FINGRIP™ COUPLERS


NYLON FULLY INSULATED
MALE/FEMALE COUPLERS

600 V, 105° C



Features and Benefits

- Full insulation.
 - ◊ Eliminates the need for post insulation.
- Nylon insulation.
 - ◊ Tough duty 600V rating at 105°C.
- Nema detent.
 - ◊ Insures proper coupler alignment and secureness.
- Tin plated brass.
 - ◊ Balanced material specifications for strength and corrosion resistance with high conductivity.

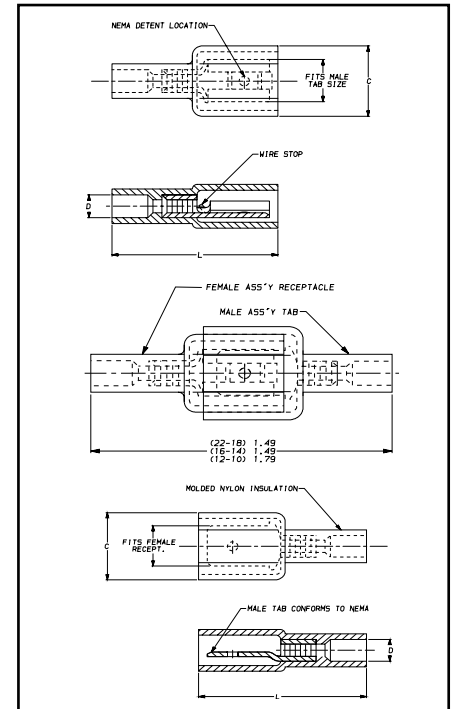

B-39

FEMALE RECEPTACLE COUPLER												
CATALOG NUMBER	WIRE RANGE AWG	WIRE RANGE MM	FITS MALE TAB SIZE	NYLON INSUL. COLOR	STOCK THK. RECEPT	L MAX.	B MAX.	D WIRE INS OD MAX	INSTALLATION TOOLING	BULK CATALOG NUMBER	TAPE MOUNTED CATALOG NO.	
QN18FF250CD	22-18	.25-1.5	.250 X .032	RED	.018	.89	.38	.165	Y10D*	QN18FF250B	QN18FF250M	
QN18FF187CD			.187 X .020	RED	.016	.78	.60	.135		QN18FF187B	QN18FF187M	
QN14FF250CD	16-14	1.0-2.5	.250 X .032	BLUE	.018	.89	.38	.165		QN14FF250B	QN14FF250M	
QN14FF187CD			.187 X .020	BLUE	.016	.78	.83	.285		QN14FF187B	QN14FF187M	
QN10FF250CD	12-10	2.6-6.6	.250 X .032	YELLOW	.018	1.04	.38	.275		QN10FF250B	QN10FF250M	
MALE TAB COUPLER												
CATALOG NUMBER	WIRE RANGE AWG	WIRE RANGE MM	FITS FEMALE RECEPT.	NYLON INSUL. COLOR	STOCK THK. TAB	L MAX.	B MAX.	D WIRE INS OD MAX			BULK CATALOG NUMBER	TAPE MOUNTED CATALOG NO.
QN18MF250CD	22-18	.25-1.5	.250 X .032	RED	.031	.97	.45	.145			QN18MF250B	QN18MF250M
QN14MF250CD	16-14	1.0-2.5	.250 X .032	BLUE	.031	.97	.45	.170			QN14MF250B	QN14MF250M
QN10MF250CD	12-10	2.6-6.6	.250 X .032	YELLOW	.031	1.12	.46	.255			QN10MF250B	QN10MF250M

* For UL listed applications contact factory.