



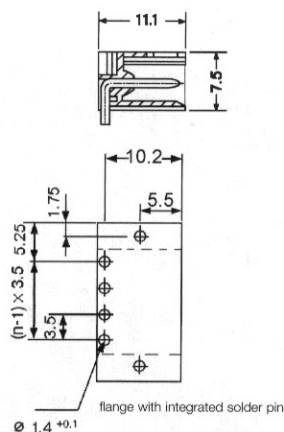

Pin headers SL-SMT 3.5/90LF

new



Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	13	10	10

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 211

Solder pin length 1.5 mm

Tape-on-Reel

Color

Tape width 56 mm 32 mm

Poles	Type	Part No.	Part No.	Qty.
2	SL-SMT 3.5/2/90LF	1762004001	1762004002	250
3	SL-SMT 3.5/3/90LF	1762014001	1762014002	250
4	SL-SMT 3.5/4/90LF	1762024001	-	250
5	SL-SMT 3.5/5/90LF	1762034001	-	250
6	SL-SMT 3.5/6/90LF	1762044001	-	250
7	SL-SMT 3.5/7/90LF	1762054001	-	250
8	SL-SMT 3.5/8/90LF	1762064001	-	250
9	SL-SMT 3.5/9/90LF	1762074001	-	250

For detailed product and application information for SMT see chapter "Other Applications" page 176-183.

Accessories	Page
Mounting	188, 189
Marking	190
Coding	193
Miscellaneous	198

Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	13	10	10

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 211

Solder pin length 1.5 mm

Tray

Color

Poles	Type	Part No.	Qty.
2	SL-SMT 3.5/2/90LF	1762003001	96
3	SL-SMT 3.5/3/90LF	1762013001	84
4	SL-SMT 3.5/4/90LF	1762023001	72
5	SL-SMT 3.5/5/90LF	1762033001	60
6	SL-SMT 3.5/6/90LF	1762043001	54
7	SL-SMT 3.5/7/90LF	1762053001	48
8	SL-SMT 3.5/8/90LF	1762063001	42
9	SL-SMT 3.5/9/90LF	1762073001	42
10	SL-SMT 3.5/10/90LF	1762083001	36
11	SL-SMT 3.5/11/90LF	1762093001	36
12	SL-SMT 3.5/12/90LF	1762103001	30
13	SL-SMT 3.5/13/90LF	1762113001	30
14	SL-SMT 3.5/14/90LF	1762123001	24
15	SL-SMT 3.5/15/90LF	1762133001	24
16	SL-SMT 3.5/16/90LF	1762143001	24
17	SL-SMT 3.5/17/90LF	1762153001	24
18	SL-SMT 3.5/18/90LF	1762163001	24
19	SL-SMT 3.5/19/90LF	1762173001	18
20	SL-SMT 3.5/20/90LF	1762183001	18
21	SL-SMT 3.5/21/90LF	1762193001	18
22	SL-SMT 3.5/22/90LF	1762203001	18
23	SL-SMT 3.5/23/90LF	1762213001	18
24	SL-SMT 3.5/24/90LF	1762223001	18

For detailed product and application information for SMT see chapter "Other Applications" page 176-183.

Accessories	Page
Mounting	188, 189
Marking	190
Coding	193
Miscellaneous	198

Technical data	VDE	UL	CSA
Rated voltage (V)	125*	300	300
Rated current (A)	13	10	10

*Pollution severity 3 / Overvoltage category III

Additional technical data see page 211

Solder pin length 1.5 mm

Standard box

Color

Poles	Type	Part No.	Qty.
2	SL-SMT 3.5/2/90LF	1762002001	100
3	SL-SMT 3.5/3/90LF	1762012001	100
4	SL-SMT 3.5/4/90LF	1762022001	100
5	SL-SMT 3.5/5/90LF	1762032001	50
6	SL-SMT 3.5/6/90LF	1762042001	50
7	SL-SMT 3.5/7/90LF	1762052001	50
8	SL-SMT 3.5/8/90LF	1762062001	50
9	SL-SMT 3.5/9/90LF	1762072001	50
10	SL-SMT 3.5/10/90LF	1762082001	50
11	SL-SMT 3.5/11/90LF	1762092001	50
12	SL-SMT 3.5/12/90LF	1762102001	50
13	SL-SMT 3.5/13/90LF	1762112001	50
14	SL-SMT 3.5/14/90LF	1762122001	50
15	SL-SMT 3.5/15/90LF	1762132001	50
16	SL-SMT 3.5/16/90LF	1762142001	50
17	SL-SMT 3.5/17/90LF	1762152001	20
18	SL-SMT 3.5/18/90LF	1762162001	20
19	SL-SMT 3.5/19/90LF	1762172001	20
20	SL-SMT 3.5/20/90LF	1762182001	20
21	SL-SMT 3.5/21/90LF	1762192001	20
22	SL-SMT 3.5/22/90LF	1762202001	20
23	SL-SMT 3.5/23/90LF	1762212001	20
24	SL-SMT 3.5/24/90LF	1762222001	20

For detailed product and application information for SMT see chapter "Other Applications" page 176-183.

Accessories	Page
Mounting	188, 189
Marking	190
Coding	193
Miscellaneous	198