


2SA1979UF

■ Features

- Large collector current.
- Suitable for low-voltage operation because of its low saturation voltage.

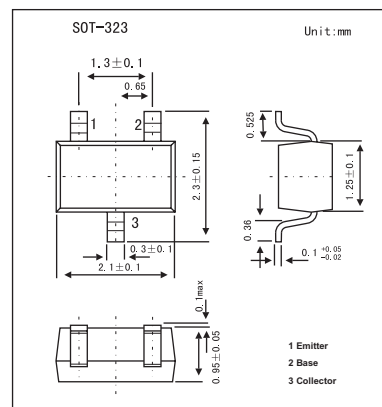

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage	V _{CB0}	-40	V
Collector-emitter voltage	V _{CEO}	-32	V
Emitter-base voltage	V _{EB0}	-5	V
Collector current	I _C	-500	mA
Collector dissipation	P _C	200	mW
Junction temperature	T _J	150	°C
Storage temperature	T _{stg}	-55 to +150	°C

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BV _{CB0}	I _C =-100μA, I _E =0	-40			V
Collector-emitter breakdown voltage	BV _{CEO}	I _C =-1mA, I _B =0	-32			V
Emitter-base breakdown voltage	BV _{EB0}	I _E =-10μA, I _C =0	-5			V
Collector cutoff current	I _{CB0}	V _{CB} =-40V, I _E =0			-0.1	μA
Emitter cutoff current	I _{EB0}	V _{EB} =-5V, I _C =0			-0.1	μA
DC current transfer ratio	h _{FE}	V _{CE} =-1V, I _C =-100mA	70		240	
Collector-emitter saturation voltage	V _{CE(sat)}	I _C =-100mA, I _B =-10mA			-0.25	V
Transition frequency	f _T	V _{CE} =-6V, I _C =-20mA		200		MHz
Output capacitance	C _{ob}	V _{CB} =-6V, I _E =0, f=1MHz		7.5		pF

■ hFE Classification

Marking	A	
Rank	O	Y
hFE	70~140	120~240