

APPLIED CONCEPTS INC.

397 Route 281 - P.O. BOX 1175
 Tully, New York 13159-1175
 Phone: (315) 696-6676 Fax: (315) 696-9923
 E-mail: www.acipower.com

AC-1496

PRODUCT DATA SHEET

01/05/05

CCFL INVERTER

(For Single Tube Applications)

The AC-1496 is designed to drive 1 CCFL to a nominal current level of 4.5mA.

Intensity control (0-100%) is accomplished by the user providing a variable dc level of 0V(off) to 5V(full-on) at pin 3 of CON1.

A +5V level is available at pin 4 of CON1 for powering the high-side of the intensity control potentiometer.

The lamp output is open and short circuit protected.

UL 1950 Recognized (File# E201813).


Specifications:

- Vin = +12V +/- 10%
- CCFL strike voltage = 1050Vrms @ Vin=12V
- CCFL tube current = 4.5mA/tube @ 100% intensity/Vin=12V
- Recommended CCFL sustaining voltage = 400Vrms - 600Vrms
- Nominal tube current frequency = 39khz +/- 10%
- Nominal pwm frequency = 98Hz +/- 3%
- Pwm duty cycle range = 0 to 100%
- Average electrical efficiency >87%

Additional control capability:*

- Enable/Disable function
- Simple 1 or 2 button intensity control
- CDS ambient light sensor control
- Two-wire(variable resistance) intensity control
- Serial communication control

* Please contact factory for information

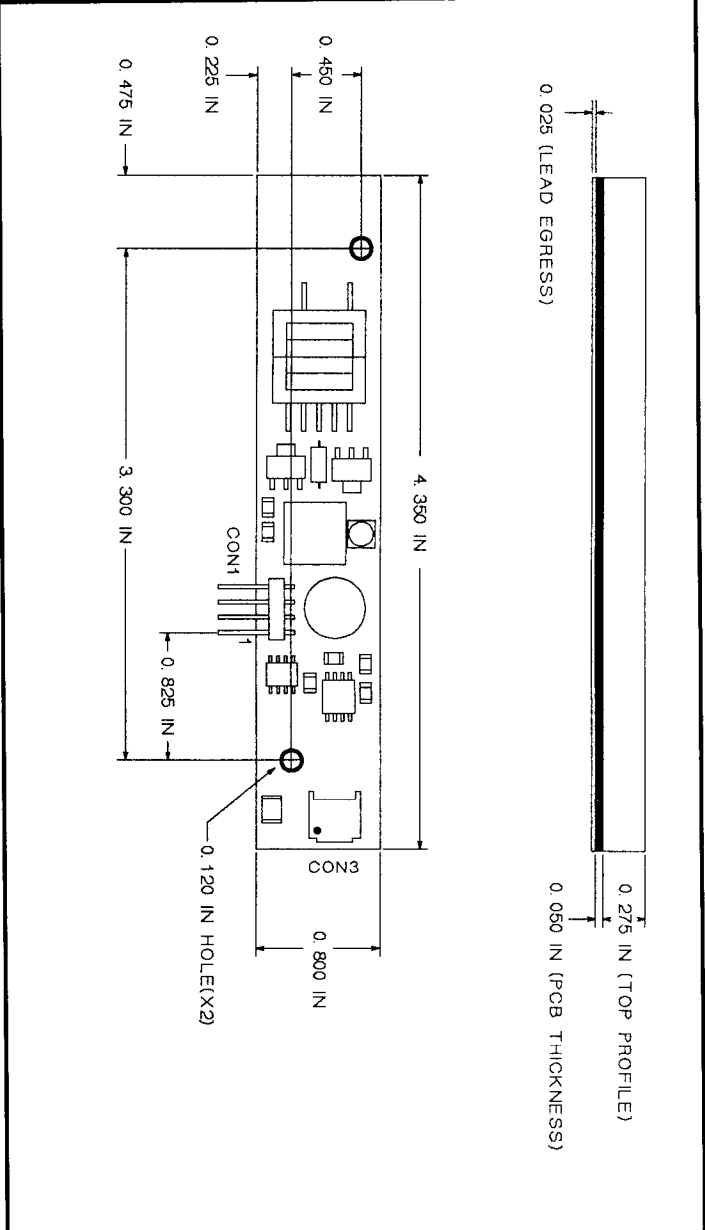

INPUT CONNECTOR CON1 MOLEX 22-28-8041		OUTPUT CONNECTOR CON3 JST SM02B-BHSS-1-TB	
PIN #	FUNCTION	PIN #	FUNCTION
1	+VIN	1	CCFL HOT
2	GND	2	CCFL COLD
3	VCNTL		
4	LOGIC HI OUT		