




Number of contacts


48, 32, 16




Female connectors

Identification	Number of contacts	Contact arrangement	Part No. Performance levels according to DIN 41 612, explanations page 10		
			3	2	1
Female connector with angled solder pins	48		09 28 148 7801	09 28 148 6801	09 28 148 2801*
	32		09 28 132 7801	09 28 132 6801	09 28 132 2801*
	16		09 28 116 7801	09 28 116 6801	09 28 116 2801*
	16		09 28 116 7811	09 28 116 6811	09 28 116 2811*

Dimensions

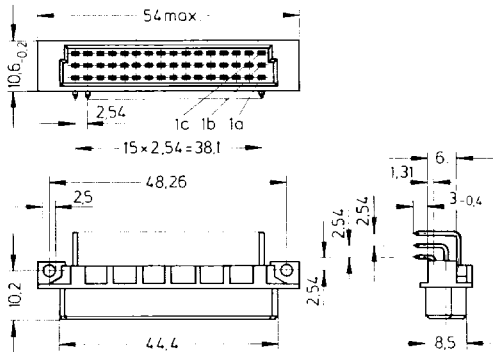

Board drillings

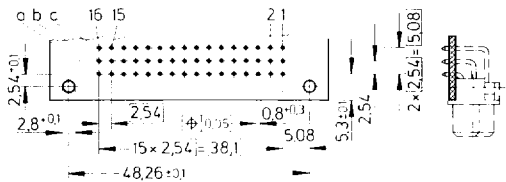

Dimensions in mm

* Not normally kept in stock