

FEATURES AND SPECIFICATIONS

Features and Benefits

- Sizes 2 to 20 circuits
- Friction locking window provides secure mating retention

Reference Information

Packaging: Bag
 Mates With: 5507
 Designed In: Millimeters


Electrical

Voltage: 250V
 Current: 3.0A
 Contact Resistance: 20mΩ max.
 Dielectric Withstanding Voltage: 1000V AC/1 min.
 Insulation Resistance: 1000 MΩ min.

Physical


Housing: 6/6 nylon, UL 94V-0
 Contact: Brass, Tin over Copper plating
 Operating Temperature: -40 to +105°C

5508
Vertical
Friction Lock



B
 2.00 to 2.50mm (.079 to .098") Pitch

CATALOG DRAWING (FOR REFERENCE ONLY)

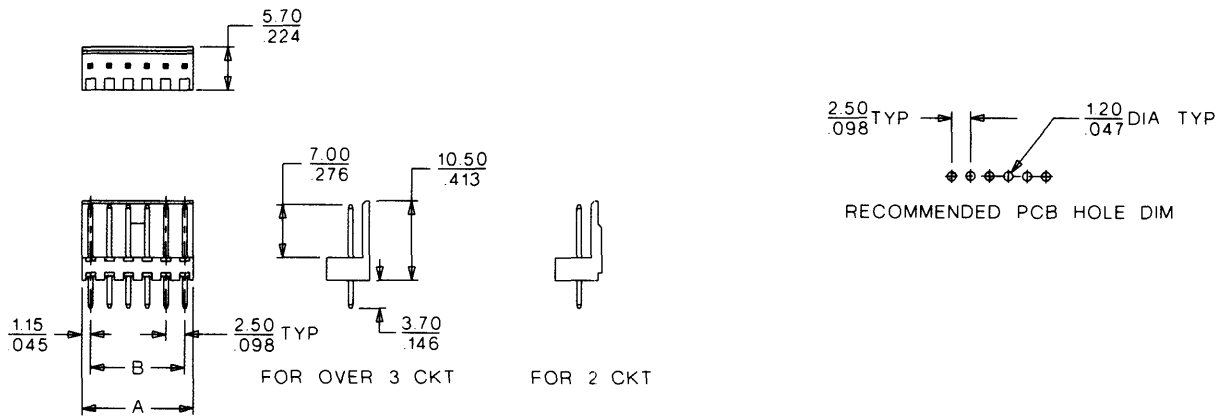

ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.	Dimension	
		A	B
2	39-27-0026	4.80 (.189)	2.50 (.098)
3	39-27-0036	7.30 (.287)	5.00 (.197)
4	39-27-0046	9.80 (.386)	7.50 (.295)
5	39-27-0056	12.30 (.484)	10.00 (.394)
6	39-27-0066	14.80 (.583)	12.50 (.492)
7	39-27-0076	17.30 (.681)	15.00 (.591)
8	39-27-0086	19.80 (.780)	17.50 (.689)
9	39-27-0096	22.30 (.878)	20.00 (.787)
10	39-27-0106	24.80 (.976)	22.50 (.886)
11	39-27-0116	27.30 (1.075)	25.00 (.984)