
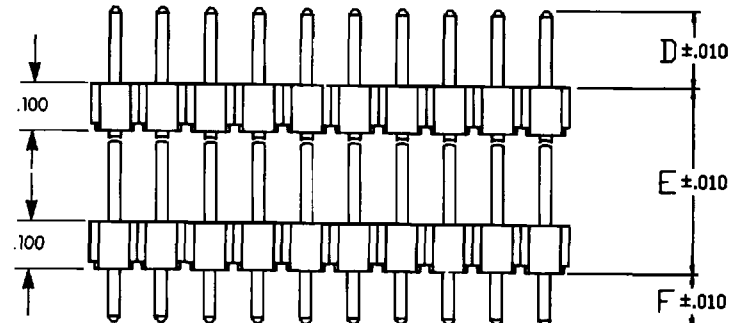
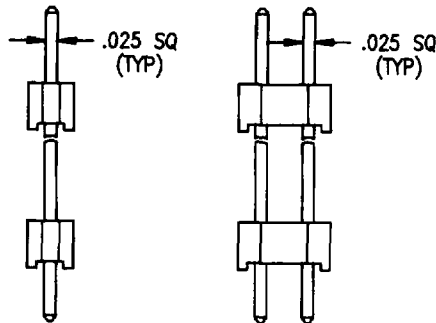
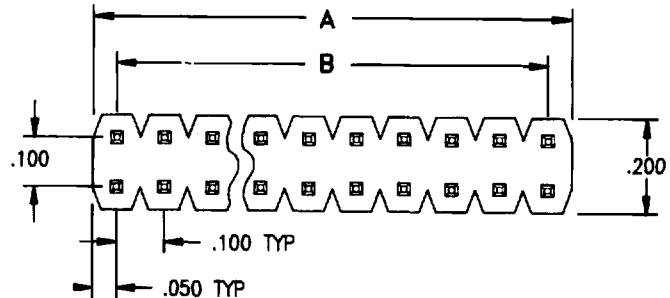


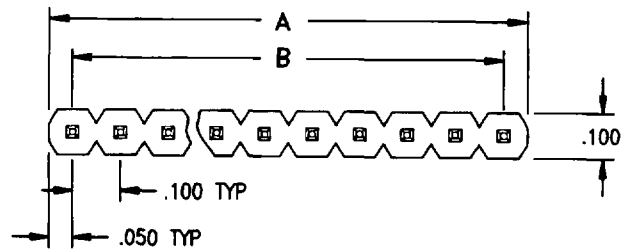


DIMENSIONS

A = The number of equal spaces X .100 + .100

B = The number of equal spaces X .100

To determine the number of equal spaces, subtract (1) from the number of desired contact positions, i.e. a 28 position connector has 27 equal spaces.

PART NUMBERING



D - Stacking Header

CONFIGURATION

S - Single Row
D - Dual Row

SERIES CODE

25 - .025 sq. header

NUMBER OF POSITIONS

Single Row - 01 thru 40
Dual Row - 04 thru 80

MATING POST LENGTH (DIM "D")

23 - .230 (STANDARD)
for additional mating lengths, round off desired dimension (Ex. .305 - 30)

OPTIONS:

A - Alignment Pin
L - Board Lock
C - Crimped Locking Lead

TERMINATION

S - Dip Solder

SOLDER POST LENGTH (DIM "F")

10 - .100 (STANDARD)
For additional post lengths, round off desired dimension (Ex. .505 - 50)

SPACE BETWEEN BOARDS (DIM "E")

40 - .400 (STANDARD)
For additional space dimension, round off desired dimension (Ex. .505 - 50)

PLATING

22 - .000010 in gold on contact area over .000050 in Ni, .000100 SnPb on Tail.
24 - .000010 in gold on contact area over .000050 in Ni, flash Gold on Tail.
(Consult factory for other options.)