


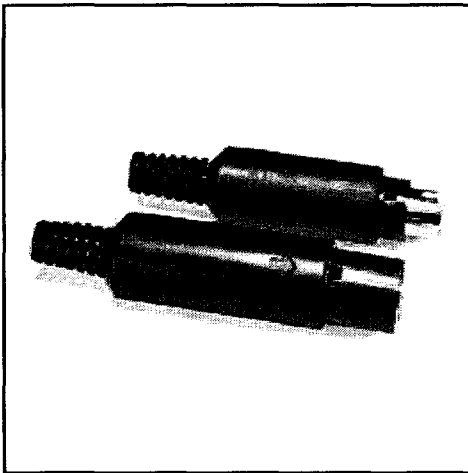

Mini DIN 4031-[*][**]

*Number of contacts;
Options are: 3, 4, 5, 6, 7, 8, 9

**Gender; Options are:
M = male
F = female

MATERIALS:

- Insulator: UL94V-0 / PBT glass filled
- Contacts: Pin = Brass, Socket = Phosphor bronze
- Plating: Tin
- Operating temperature: -55°C to +105°C
- Metal shell: Nickel plated
- Cover: ABS
- Strain relief cap: PVC
- Color: Black


ELECTRICAL:

- Current rating: 1 AMP maximum
- Insulation resistance: 50 Megohms minimum
- Dielectric withstanding voltage: 250 VAC
- Contact resistance: 30 milliohms maximum

FEATURES:


- Snap together design
- Quick easy assembly
- Signal / power capability

4031 Male

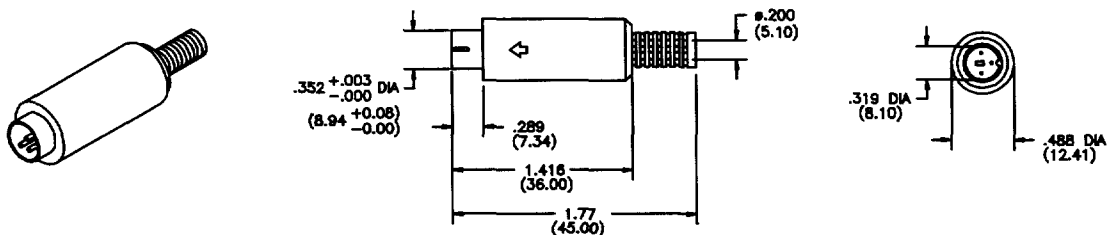

NO. OF CONTACTS	3P	4P	5P	6P	7P	8P	9P
POSITION							

4031 Female

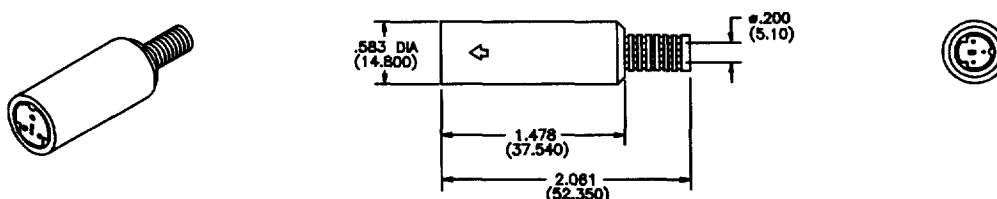

NO. OF CONTACTS	3P	4P	5P	6P	7P	8P	9P
POSITION							