



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PART NUMBER		TAB SIZE	WIRE RANGE AWG (mm ²)	DIMENSIONS in		
PREFIX	PKG			A $\pm .03$ (0.8)	B $\pm .01$ (0.3)	C $\pm .01$ (0.3)
D18-188B	-C	.187 x .020	22-18	.56	.23	.10
	-M	(4.8 x 0.5)	(.38-1.0)	(14.2)	(5.8)	(2.5)
D14-188B	-C	.187 x .020	16-14	.56	.23	.10
	-M	(4.8 x 0.5)	(1.5-2.5)	(14.2)	(5.8)	(2.5)



NOTES:

- USED FOR:
A. STRANDED COPPER WIRE ONLY
B. 302°F (150°C) MAX TEMP RATING
- PACKAGE QTY:
A. STD: C=100
B. BULK: M=1000
- MATERIAL:
A. STAMPING: .016 (0.41) THK BRASS, TIN PLATED
- WIRE STRIP LENGTH 9/32 $\pm 1/32$ (7.1 ± 0.8)
-0 -0
- FIRST INSERTION FORCE: 12 LB (53N) MAX
FIRST WITHDRAWAL FORCE: 12 LB (53N) MAX
6 LB (27N) MIN
- INSTALLATION TOOLS:
A. CT-100 (POCKET B)
- DIMENSIONS IN BRACKETS ARE IN MILLIMETERS OR mm²

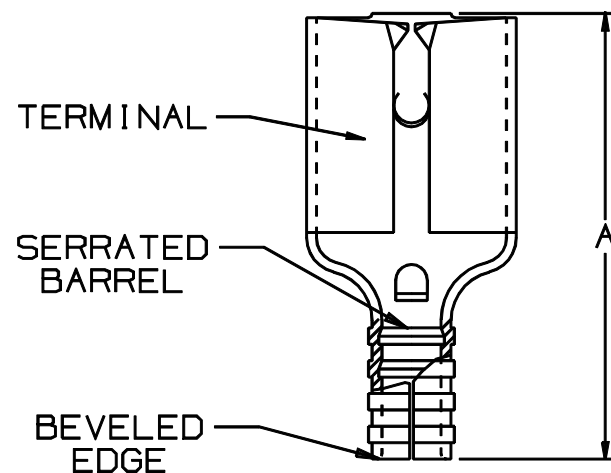

CERTIFIED
LR31212

A41303_05

05	1/01	RM		FILESPEC WAS N41303AA_PCD_04						PANDUIT CORP. TINLEY PARK, ILLINOIS NON-INSULATED FEMALE DISCONNECT, BUTTED SEAM (.188 SERIES)			
04	4/95	MS		REMOVED SLOT FROM TERMINAL	03131								
03	10/94	TH	RS	UPDATED NOTES AND DIMENSIONS	02549		LA	TFK					
02	1/92	DL	DL	UPDATED FORMAT	00798		LA	KRS					
REV	DATE	BY	CHK	DESCRIPTION	ECN #	QA	CUST	PM	APP	DRAWN BY DAW	CHK'D	SCALE NONE	DRAWING NO. A41303

NON-INSULATED FEMALE DISCONNECT,
BUTTED SEAM (.188 SERIES)