




(1,27mm) .050"

DWM, HDWM SERIES

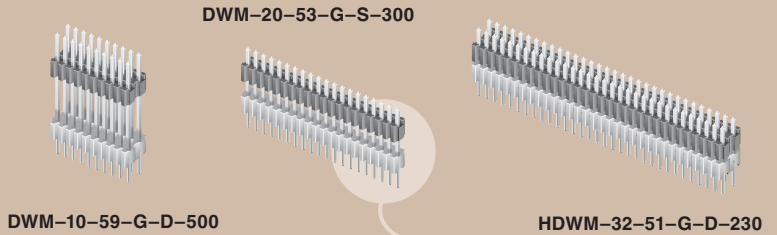

THROUGH-HOLE MICRO BOARD STACKER

SPECIFICATIONS

DWM

For complete specifications see www.samtec.com?DWM

Insulator Material:

Top: Black LCP
Bottom: Natural LCP



Terminal Material:

Phosphor Bronze



Plating:

Au or Sn over 50µ" (1,27µm) Ni

Current Rating:

1A

Operating Temp Range:

-55°C to + 105°C with Tin
-55°C to + 125°C with Gold

RoHS Compliant:

Yes

HDWM

For complete specifications see www.samtec.com?HDWM

Same as DWM except not CSA rated.



Note: Other Gold plating options available. Contact Samtec.

Note: These Series are non-standard, non-returnable.



Processing:

Max Processing Temp: 230°C for 60 seconds, or 260°C for 20 seconds 3x

Lead-Free Solderable:

Yes



Mates with:
SMS, SLM, RSM

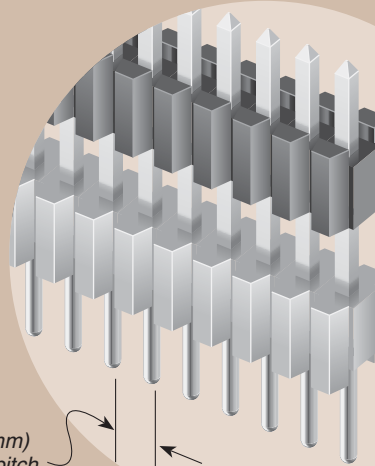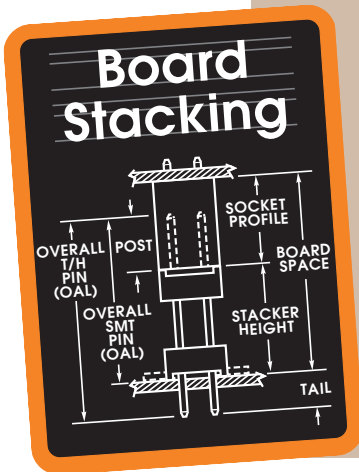

TYPE STRIP	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	OTHER OPTION
	01 thru 50	Specify LEAD STYLE from chart	-L = 10µ" (0,25µm) Gold contact, Matte Tin on tail -G = 10µ" (0,25µm) Gold on post, Gold flash on tail	-S = Single Row -D = Double Row	-“XXX” = Stacker Height Example: -250 = (6,35mm) .250"	-“XXX” = Polarized Position (Specify position of omitted pin)
		DWM = Standard Board Spacer HDWM = High Temp Board Spacer				



www.samtec.com

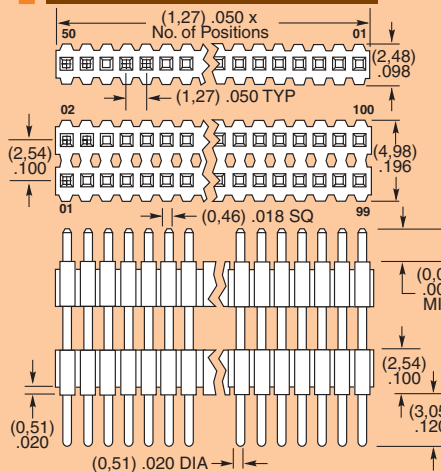

LEAD STYLE	OAL
-01	(11,43) .450
-51	(10,41) .410
-52	(10,80) .425
-53	(12,83) .505
-54	(14,10) .555
-55	(15,49) .610
-56	(15,88) .625
-57	(16,51) .650
-58	(17,91) .705
-59	(19,18) .755
-60	(20,96) .825
-61	(26,67) 1.050

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM