


**NOTES:**

- ① MAT'L: COPPER (STOCK TKN.  $\frac{.040}{.040}$  )
  - PLATING: ELECTRO TIN (.0003 MIN)
  - ② TIN-PLATED BRASS FUNNEL FERRULE
  - ③ NYLON INSULATION (COLOR CODED YELLOW )
- STUD SIZES: ( $\pm .005$ )
- 02 = .094
  - 04 = .119
  - 06 = .146
  - 08 = .173
  - 10 = .198
  - 14 = .265
  - 56 = .328
  - 38 = .390
- "UL" LISTING # E32244  
 "CSA" LISTING # 18689
- WIRE SIZE: 12 - 10 AWG<sup>2</sup>  
 4.0 - 6.0 MM<sup>2</sup>

ALL DIMENSIONS =  $\frac{\text{INCHES}}{\text{MM}}$  (MWID) = DENOTES MAXIMUM WIRE INSULATION DIAMETER

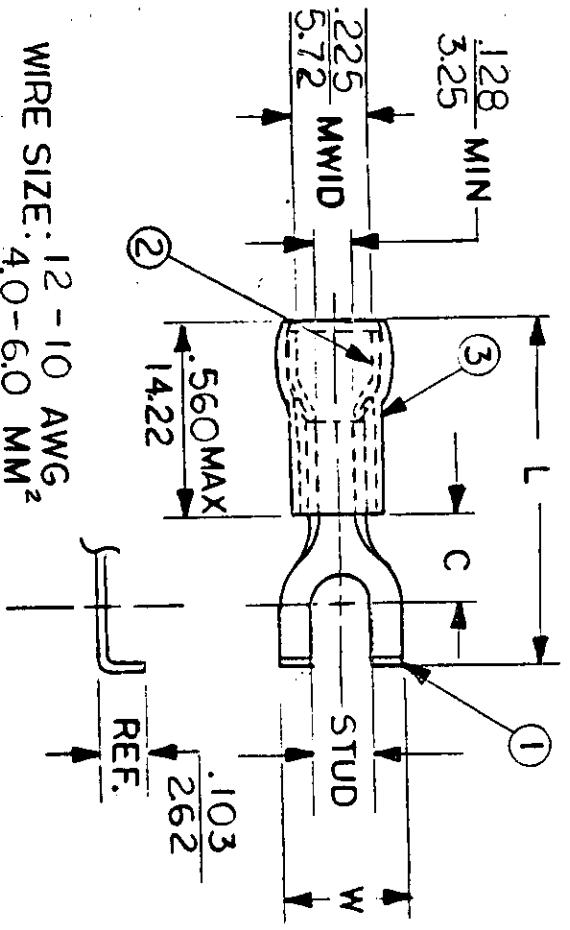

FILE NO. C-CD-804-02

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	AVAILABLE STUD SIZES	DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED		REFERENCE	SCALE:	NTS	DATE	TITLE:	DWG. NO.	CUSTOMER DWG
					FRAC.	DEC.	ANG.	DRWN. BY:	CHKD. BY:	APPRD. BY:	FLANGED SPADE TONGUE TERMINAL AVIKRIMP 800-SERIES		
C-817-	$\frac{.375}{9.53}$	$\frac{.301}{7.65}$	$\frac{1.076}{27.33}$	06, 08, 10						11.13.84		A	
										11.26.84			

