


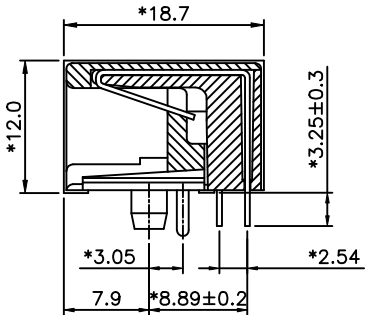


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD



NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : GLASS FILLED POLYESTER UL 94V-0.
2. HOUSING COLOR : BLACK.
3. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
4. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER : 1 LB MIN.
6. PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: 0°C TO 70°C .
3. WAVE SOLDERING TEMPERATURE: $230 \sim 250^{\circ}\text{C}$ (5~10SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO


FCC PART 68, SUBPART F.

CUL FILE NO. E163191

PART NUMBER: E560X-X2A06X-L

- | | | |
|---------------|--------|-----------|
| 8- 8 CONTACTS | 1- 3u" | 2- 6u" |
| 1-10 CONTACTS | 3-15u" | 4-30u" |
| | 5-50u" | 6-Pd 20u" |

SHIELD:
0- TIN
4- NICKEL

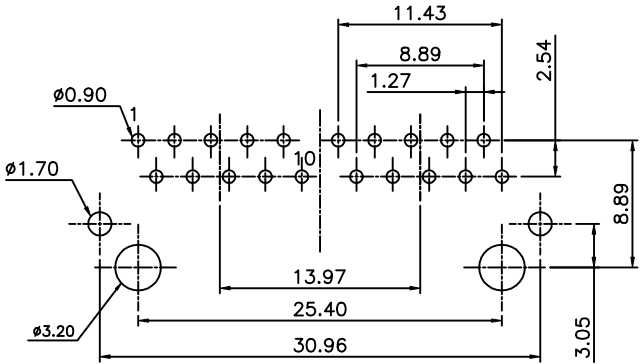

PC Board Layout Component Side Shown

MM (INCH)		DFTO ANKUE	DATE 11/22/05	FULL RISE ELECTRONIC CO., LTD	
TOLERANCES EXCEPT AS NOTED		CHKD:JAMY	DATE 2005/11/22		
MM	±	MFO	DATE	TITLE 11.5 SIDE ENTRY PCB GANG JACK 10P	
.0 ±0.20	±	APPVILUSHENG	DATE 2005/11/22		
.00 ±0.15	±	MATERIAL :		DRAWING NO. GE563023-LC	
.000 ±0.075	±	QT'Y :		/PART NO. SEE NOTE	
ANGLES ±		FINISH :		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		SCALE : 1:1		SHEET X OF Y	