
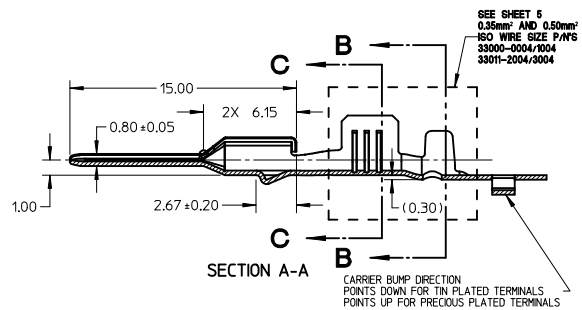
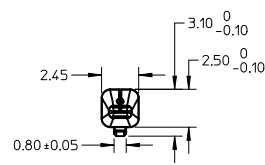



ISO VIEW
SCALE 2:1

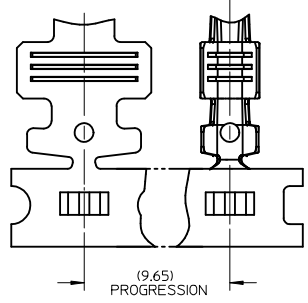


SEE SHEET 5
0.35mm² AND 0.50mm²
ISO WIRE SIZE P/AFS
3300-2004/3004
3301-2004/3004

GENERAL NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATING TERMINAL SHOWN ON SD-33012-002
- MATERIAL: ASTM B422, UNS C19025, HR04
THICKNESS: 0.30 mm ± 0.01
TEMPER: FULL HARD (REF)
TENSILE: 496-572 MPA
- TIN PLATED TERMINAL FINISH:
OVERALL UNDERPLATE ELECTRODEPOSITED NICKEL
OVERALL ELECTRODEPOSITED REFLOW TIN
- GOLD PLATED TERMINAL FINISH
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED GOLD
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- SILVER PLATED TERMINAL FINISH
OVERALL UNDERPLATE ELECTRODEPOSITED DUCTILE SULFAMATE NICKEL
CONTACT AREA - ELECTRODEPOSITED PURE SILVER (0.5% MAX IMPURITIES) SEMI-BRIGHT FINISH
- SILVER ANTI-TARNISH : EVABRITE
GRIP AREA - ELECTRODEPOSITED 100% TIN MATTE FINISH
- MEETS CRIMP PERFORMANCE SPECIFICATION SAE/USCAR-21 (RELEASED: 08/25/01)
- MEETS PERFORMANCE STANDARD FOR AUTOMOTIVE ELECTRICAL CONNECTOR SYSTEMS SAE/USCAR-2 REV 3 (APRIL 2001)
- MEETS FIELD CORRELATED LIFE TEST SAE/USCAR-20 (NOVEMBER 2001)
- MEETS WIRING COMPONENT DESIGN GUIDELINES SAE/USCAR-12 REV 2 (DECEMBER 2001)
- MEETS ELECTRICAL CONNECTION SYSTEM DESIGN SPECIFICATION (SDS) REV 11 (5/2002)
- REFERENCE PK-31300-516 FOR REEL DIRECTION
- REFERENCE AS-33000-001 FOR CRIMP INFORMATION

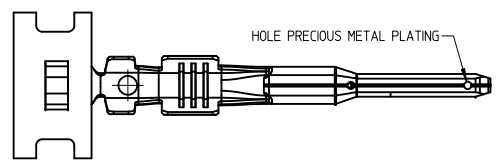

PRECIOUS METAL PLATED BLADE




TIN PLATED BLADE


ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06	QUALITY SYMBOLS ∇=0 ∇=0 ∇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION																
		<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± 0.1</td> <td>± 0.004</td> </tr> <tr> <td>3 PLACES</td> <td>± 0.15</td> <td>± 0.006</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.2</td> <td>± 0.008</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> <td>± 0.012</td> </tr> </table>			mm	INCH	4 PLACES	± 0.1	± 0.004	3 PLACES	± 0.15	± 0.006	2 PLACES	± 0.2	± 0.008	1 PLACE	± 0.3	± 0.012	DRAWN BY DATE L.PULLIAM 2006/01/31		TITLE	MX150 15MM BLADE TERMINAL		
			mm	INCH																				
		4 PLACES	± 0.1	± 0.004																				
3 PLACES	± 0.15	± 0.006																						
2 PLACES	± 0.2	± 0.008																						
1 PLACE	± 0.3	± 0.012																						
ANGULAR ± 3 °		CHECKED BY DATE A.DHIR 2006/02/01																						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		APPROVED BY DATE B.MOSER 2006/02/02		MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-33000-001		SHEET NO. 1 OF 5																
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																								

TABLE										
SUPPLIER PART NUMBER		PLATING	GRIP CODE	WIRE APPLICATION		A ±0.30	B ±0.30	C ±0.30	D ±0.30	COMMENTS
RIGHT PAYOFF DIRECTION B	LEFT PAYOFF DIRECTION D			SAE (AWG)	METRIC (mm ²)					
33000-0001	33000-1001	TIN	14	14	2.0-15	3.9	3.8	1.7	1.6	
33000-0002	33000-1002	TIN	18	16/18/20	1.0-0.75	3.3	3.1	1.3	1.4	
33000-0003	33000-1003	TIN	22	22	0.35-0.50	2.5	2.6	0.9	1.0	
33000-0004	33000-1004	TIN	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm)
33011-1002	33011-0002	GOLD	14	14	2.0-15	3.9	3.8	1.7	1.6	
33011-1004	33011-0004	GOLD	18	16/18/20	1.0-0.75	3.3	3.1	1.3	1.4	
33011-1006	33011-0006	GOLD	22	22	0.35-0.50	2.5	2.6	0.9	1.0	
33011-2003	33011-3003	SILVER	14	14	2.0-15	3.9	3.8	1.7	1.6	
33011-2002	33011-3002	SILVER	18	16/18/20	1.0-0.75	3.3	3.1	1.3	1.4	
33011-2001	33011-3001	SILVER	22	22	0.35-0.50	2.5	2.6	0.9	1.0	
33011-2004	33011-3004	SILVER	M3	N/A	0.35-0.50	2.5	2.7	0.9	154±0.1	PREFERRED TERMINAL FOR USE IN SEALED APPLICATION WITH 0.35& 0.50 WIRES (OD 1.2-1.7mm) USE IN CLASS 3 (125° C) APPLICATIONS ONLY



ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06 REV C12	QUALITY SYMBOLS = 0 = 0 = 0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
		4 PLACES ± 0.3 3 PLACES ± 0.3 2 PLACES ± 0.1 1 PLACE ± 0.3	mm INCH ± 0.3 ± 0.3 ± 0.1 ± 0.1 ± 0.3 ± 0.3	DRAWN BY L.PULLIAM	DATE 2006/01/31	TITLE MX150 15MM BLADE TERMINAL	CHECKED BY A.DHIR	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± 3°		APPROVED BY B.MOSER		DATE 2006/02/02	MOLEX INCORPORATED	
				MATERIAL NO. SEE TABLE		DOCUMENT NO. SD-33000-001		SHEET NO. 2 OF 5
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

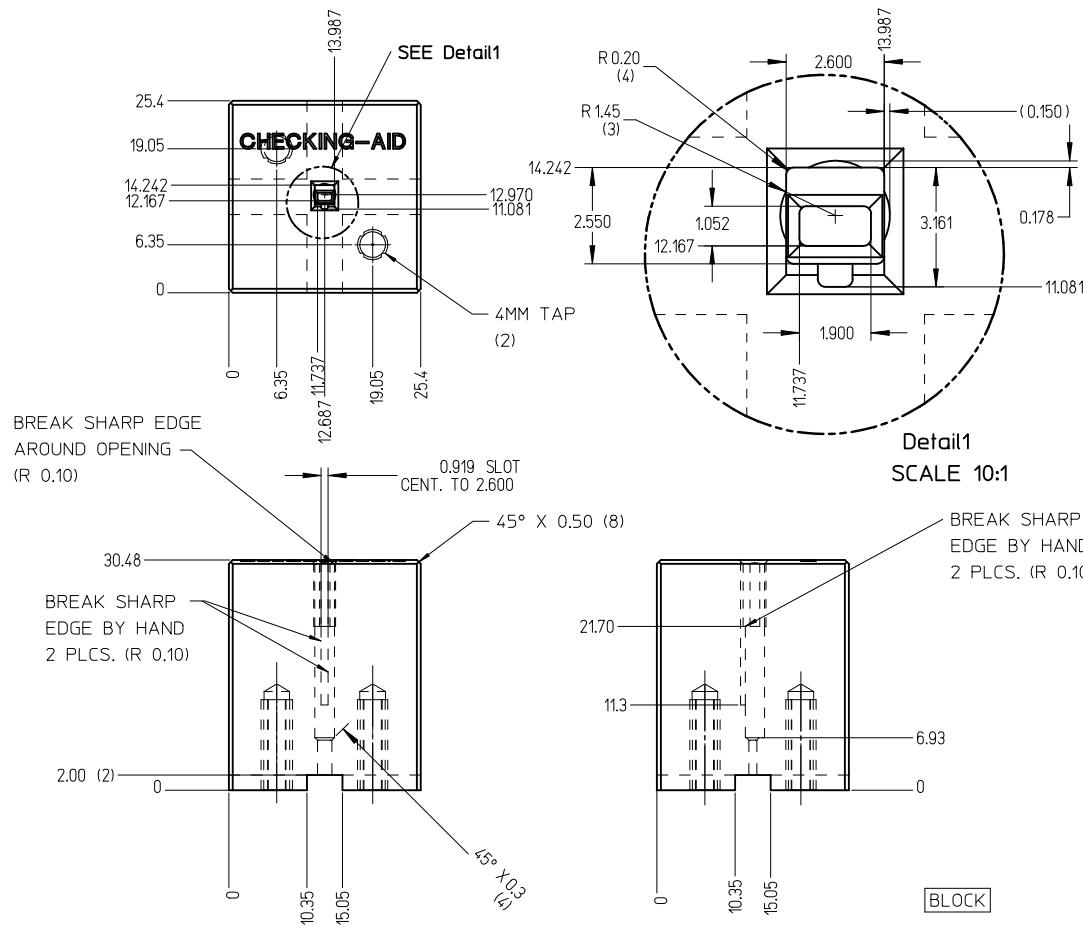

CHECKING-AID
 2 PIECE ASM. A2 TOOL STEEL
 HARDEN & GRIND TO A ROCKWELL
 HARDNESS "C" SCALE OF 56-58

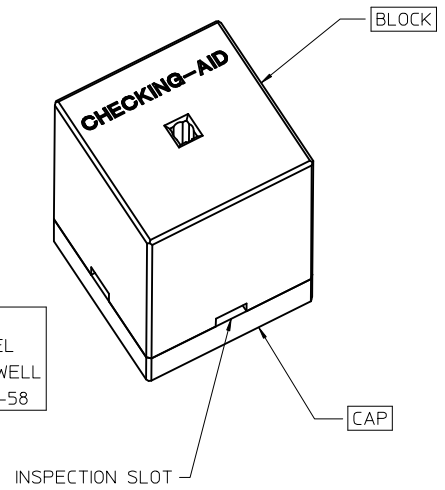

CHECKING AID TOLERANCE
 .XXX = .005
 .XX = .03
 .X = .3

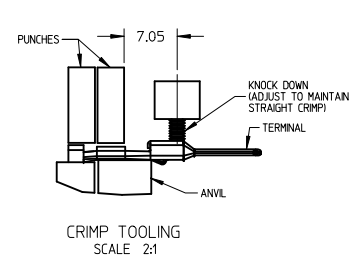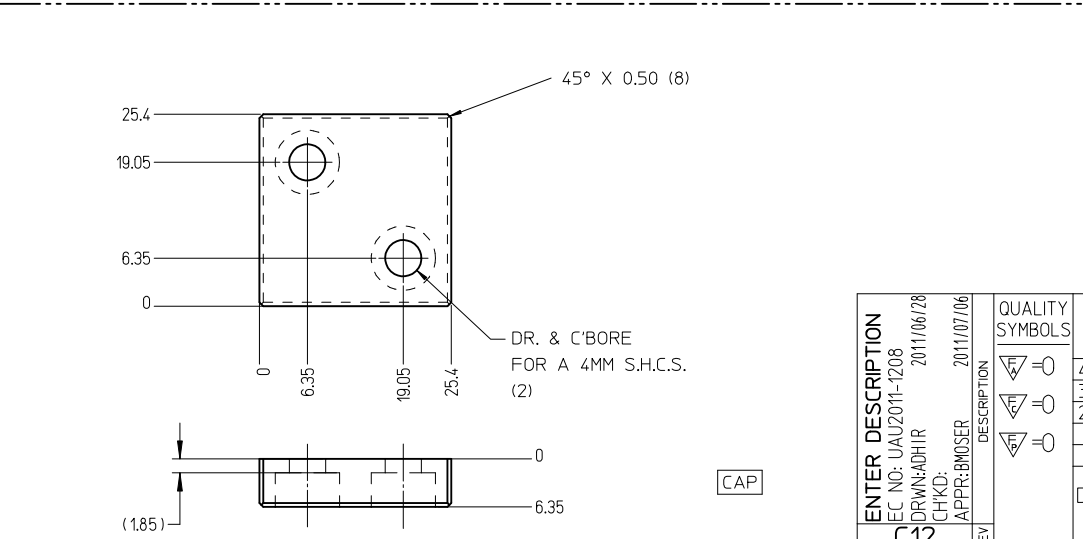




- CRIMP REQUIREMENTS:
1. CRIMP STRAIGHTNESS MUST BE MAINTAINED. USE A KNOCKDOWN TOOL LOCATED AS SHOWN. TERMINAL BOX MUST NOT BE DEFORMED
 2. AFTER CRIMPING, THE TERMINAL AND WIRE MUST FIT FREELY INTO THE CHECKING AID 33000-700. PROPER INSERTION DEPTH IS MET WHEN BLADE TIP STOPS ON CAP. SLOTS PROVIDED TO VISUALLY INSPECT STOPPAGE OF PIN TIP.
 3. FOR OTHER MECHANICAL REQUIREMENTS ON CRIMPED TERMINALS. REFER TO SAE/USCAR-21 (5-13-02) SECTIONS 4.2 (VISUAL INSPECTION), 4.3 (CROSS SECTION ANALYSIS) AND 4.4 (CONDUCTOR CRIMP PULLOUT FORCE)

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0
--	--------------------------------------





GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE MM ONLY
4 PLACES ± .05	DRAWN BY DATE L.PULLIAM 2006/01/31
3 PLACES ± .04	CHECKED BY DATE A.DHIR 2006/02/01
2 PLACES ± 0.1	APPROVED BY DATE B.MOSER 2006/02/02
1 PLACE ± 0.3	MATERIAL NO.
ANGULAR ± 3°	SCALE 2:1
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SIZE C

SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
MX150 1.5MM BLADE TERMINAL		
MOLEX INCORPORATED		
DOCUMENT NO. SD-33000-001	SHEET NO. 3 OF 5	

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

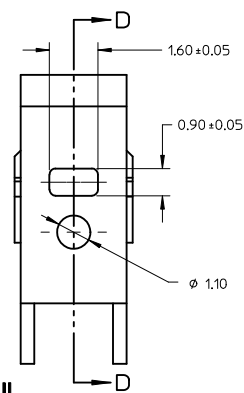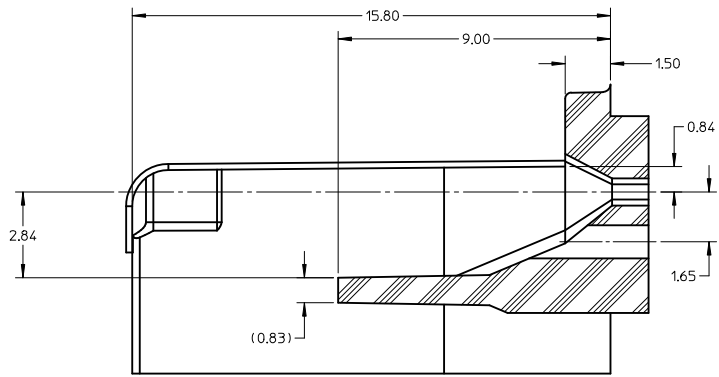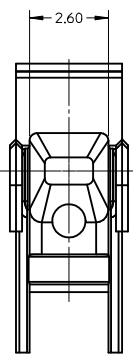




SECTION D-D TPA/INSERT DETAIL

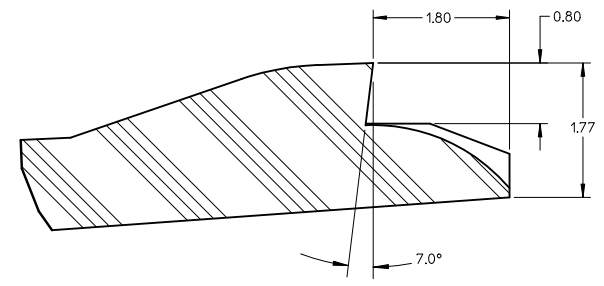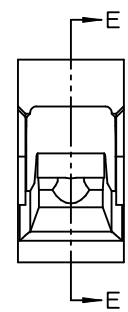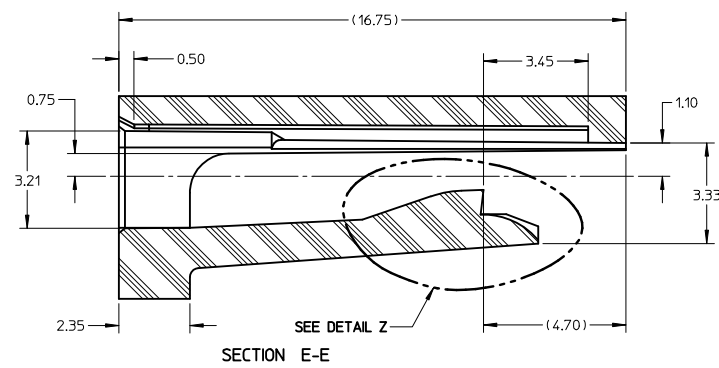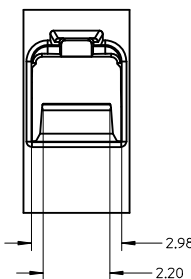

DETAIL Z SCALE 20:1

HOUSING DETAIL


- NOTES: (UNLESS OTHERWISE SPECIFIED)
- TOLERANCES: LINEAR ±0.10
ANGULAR 3°
 - ALL DRAFT WITHIN TOLERANCE
 - MAX RADI ON ALL CORNERS SHOWN SHARP: 0.10
 - MAX FLASH PERMISSIBLE: 0.1
 - EJECTOR PIN MARKS PERMISSIBLE IF FLUSH TO 0.25 BELOW SURFACE
 - MATERIAL: HOUSING/FINGER SPECIFICATION ENGINEERED FOR MATERIAL WITH THE FOLLOWING PROPERTIES:
A. FLEXURAL MODULUS = 4,500 TO 9,400 MPa
PER ASTM TEST D790
B. ELONGATION AT YIELD = 2.3% OR BETTER
PER ASTM TEST D638 TYPE V
 - CAVITY SPEC FOR USE ONLY WITH MOLEX BLADE TERMINAL PART NUMBERS (EXCEPT P/N'S FOR UNSEALED APPLICATIONS) SPECIFIED ELSEWHERE ON THIS DRAWING

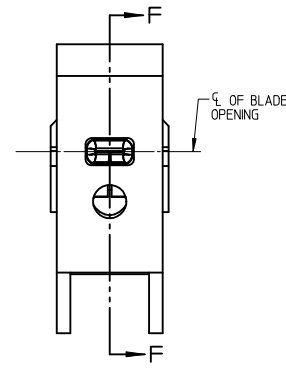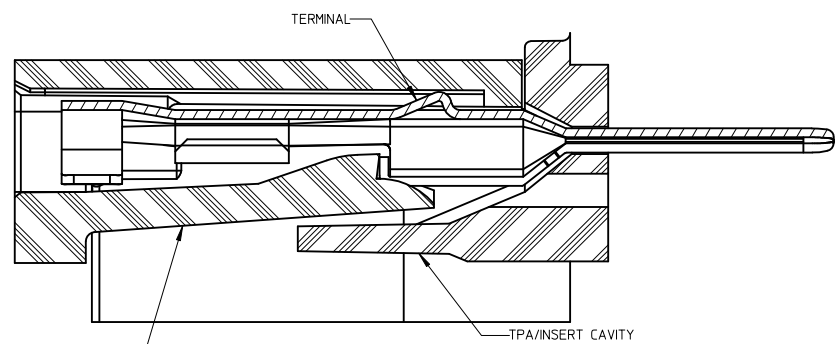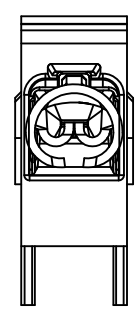






BLADE TERMINAL HOUSING CAVITY SECTION F-F

BLADE CAVITY ASSEMBLY VIEWS

ENTER DESCRIPTION EC NO: UAU2011-1208 DRWN:ADHIR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06 REV: C12	QUALITY SYMBOLS 	GENERAL TOLERANCES (UNLESS SPECIFIED) <table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± 0.1</td> <td>± 0.004</td> </tr> <tr> <td>3 PLACES</td> <td>± 0.15</td> <td>± 0.006</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.2</td> <td>± 0.008</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> <td>± 0.012</td> </tr> </table>		mm	INCH	4 PLACES	± 0.1	± 0.004	3 PLACES	± 0.15	± 0.006	2 PLACES	± 0.2	± 0.008	1 PLACE	± 0.3	± 0.012	DIMENSION STYLE MM ONLY DRAWN BY DATE L.PULLIAM 2006/01/31 CHECKED BY DATE A.DHIR 2006/02/01 APPROVED BY DATE B.MOSER 2006/02/02	SCALE METRIC	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION 	TITLE MX150 15MM BLADE TERMINAL
		mm	INCH																			
	4 PLACES	± 0.1	± 0.004																			
	3 PLACES	± 0.15	± 0.006																			
2 PLACES	± 0.2	± 0.008																				
1 PLACE	± 0.3	± 0.012																				
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE TABLE	SHEET NO. 4 OF 5																			
MOLEX INCORPORATED		DOCUMENT NO. SD-33000-001																				
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																						



ISO VIEW
SCALE 2:1

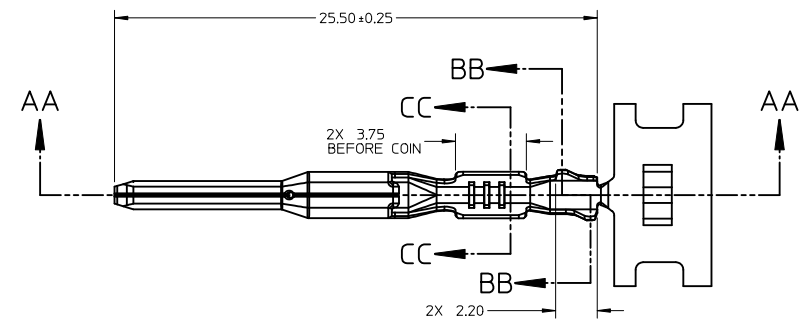

SECTION AA-AA
P/N'S 33000-0004/1004
33011-2004/3004

CARRIER BUMP DIRECTION
POINTS DOWN FOR TIN PLATED TERMINALS
POINTS UP FOR PRECIOUS METAL PLATED
TERMINALS

ENTER DESCRIPTION IEC NO: UAU2011-1208 DRWN:ADHIR 2011/06/28 CHKD: APPR:BMOSER 2011/07/06 REV:	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
	▽=0	mm INCH	MM ONLY	5:1	METRIC	
	▽=0	4 PLACES ± --- ± ---	DRAWN BY DATE	TITLE		
	▽=0	3 PLACES ± --- ± ---	L.PULLIAM 2006/01/31	MX150 15MM BLADE TERMINAL		
	2 PLACES ± 0.1 ± ---	CHECKED BY DATE	MOLEX INCORPORATED			
	1 PLACE ± 0.3 ± ---	A.DHIR 2006/02/01	SD-33000-001			
	ANGULAR ± 3 °	APPROVED BY DATE	SHEET NO.			
		B.MOSER 2006/02/02	5 OF 5			
		MATERIAL NO.	DOCUMENT NO.			
		SEE TABLE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			