

DIGITRON SEMICONDUCTORS

1N941-1N946B

11.7 VOLT TEMPERATURE COMPENSATED ZENER REFERENCE DIODES

- Standard reference voltage of 11.7 V $\pm 5\%$ with tighter tolerance also available
- Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).
- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.

MAXIMUM RATINGS

Operating and Storage Temperature:	-55 to +175°C
DC Power Dissipation:	500 mW @ $T_L = 25^\circ\text{C}$ maximum current I_{ZM} of 39mA
Optimum Voltage Temperature Stability	$I_Z = 7.5\text{mA}$
Solder Temperatures:	260°C for 10 s (maximum)

ELECTRICAL CHARACTERISTICS @ 25°C UNLESS OTHERWISE SPECIFIED

Type Number (Note 1)	Zener Voltage $V_Z @ I_{ZT}$ (Note 4)	Zener Test Current I_{ZT}	Maximum Zener Impedance (Note 2) $Z_{ZT} @ I_{ZT}$	Maximum Reverse Current $I_R @ 8\text{ V}$	Voltage Temperature Stability (Note 3 & 4) ΔV_{ZT} Maximum	Temperature Range	Effective Temperature Coefficient α_{VZ}
	Volts	mA	Ohms	μA	mV	°C	%/°C
1N941	11.12-12.28	7.5	30	15	88	0 to +75	0.01
1N941A	11.12-12.28	7.5	30	15	181	-55 to +100	0.01
1N941B	11.12-12.28	7.5	30	15	239	-55 to +150	0.01
1N942	11.12-12.28	7.5	30	15	44	0 to +75	0.005
1N942A	11.12-12.28	7.5	30	15	90	-55 to +100	0.005
1N942B	11.12-12.28	7.5	30	15	120	-55 to +150	0.005
1N943	11.12-12.28	7.5	30	15	18	0 to +75	0.002
1N943A	11.12-12.28	7.5	30	15	36	-55 to +100	0.002
1N943B	11.12-12.28	7.5	30	15	47	-55 to +150	0.002
1N944	11.12-12.28	7.5	30	15	9	0 to +75	0.001
1N944A	11.12-12.28	7.5	30	15	18	-55 to +100	0.001
1N944B	11.12-12.28	7.5	30	15	24	-55 to +150	0.001
1N945	11.12-12.28	7.5	30	15	4	0 to +75	0.0005
1N945A	11.12-12.28	7.5	30	15	9	-55 to +100	0.0005
1N945B	11.12-12.28	7.5	30	15	12	-55 to +150	0.0005
1N946	11.12-12.28	7.5	30	15	1.8	0 to +75	0.0002
1N946A	11.12-12.28	7.5	30	15	3.6	-55 to +100	0.0002
1N946B	11.12-12.28	7.5	30	15	4.7	-55 to +150	0.0002

Note 1: For tighter voltage tolerances, add a hyphenated suffix to the part number for desired tolerance at the end of the part number.

Note 2: Measured by superimposing 0.75mA ac rms on 7.5 mA dc @ 25°C.

Note 3: The maximum allowable change observed over the entire temperature range will not exceed the specified mV change at any discrete temperature between the established limits.

Note 4: Voltage measurements to be performed 15 seconds after application of dc current.


DIGITRON SEMICONDUCTORS

1N941 – 1N946B

11.7 VOLT TEMPERATURE
COMPENSATED ZENER REFERENCE DIODES

MECHANICAL CHARACTERISTICS

Case:	DO-35 Glass
Marking:	Body Painted, Alpha-Numeric
Polarity:	Cathode Band

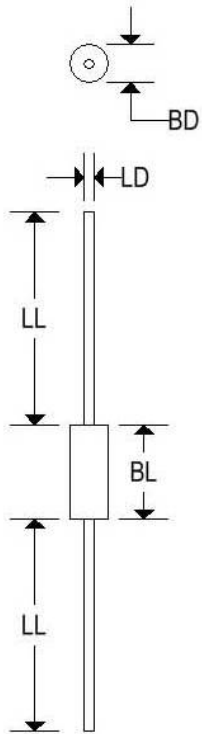

	DO-35			
	Inches		Millimeters	
	Min	Max	Min	Max
BD	0.055	0.090	1.400	2.290
BL	0.120	0.200	3.050	5.080
LD	0.018	0.022	0.460	0.560
LL	1.000	1.500	25.400	38.100

Available Non-RoHS (standard) or RoHS compliant (add PBF suffix).
Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.

