

6

5




4

3

2


1

### CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
16/3 SJT 105°C, VW-1	NORTH AMERICAN	8.5	13A 125V	BLACK	  OR 

#### NOTES:


1. Cords are to be individually bagged.

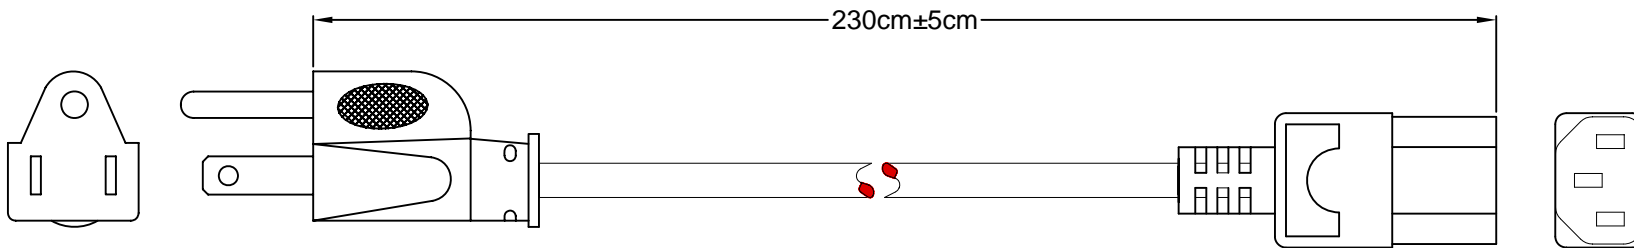

NEMA 5-15P



IEC 60320 C13

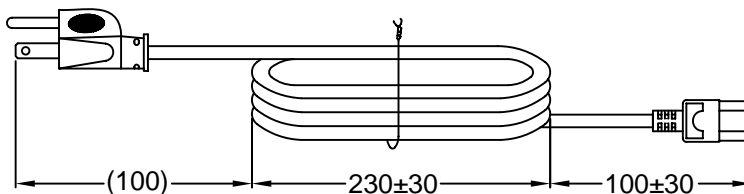

HANKING DETAIL

**RoHS  
COMPLIANT**

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			PB	TD	PB	TD	PB	TD
A	12/18/99	UPDATED DRAWING					JJ	
B	11/15/00	ADD APPROVALS & PACK SPEC.					JJ	
C	12/13/01	REVISED / UPDATED			GQ		PB	
D	06/27/02	DNM 230 WAS 183			GQ		TD	PB
E	6/22/08	TEMP. RATING WAS 75°C			PB			

TOLERANCE IN MM UNLESS OTHERWISE SPECIFIED > 1000 ± 50 <= 1000 ± 30 STRIPPED LENGTH ± 2	
DRAWN BY: AH	DATE: 1/10/94
CHECK BY: LFH	DATE: 12/10/98
APPR BY: SS	DATE: 12/10/98

**Power Dynamics, Inc.**  
 Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: AMERICAN CORD SET; 230cm LONG  
 NEMA 5-15P TO IEC 60320 C13; 16/3 SJT

10087

SIZE: A  
 SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY  
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1  
 REV: E