
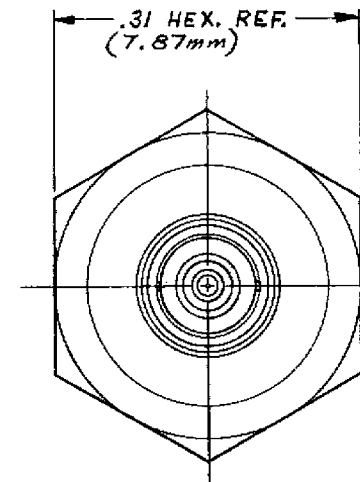


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

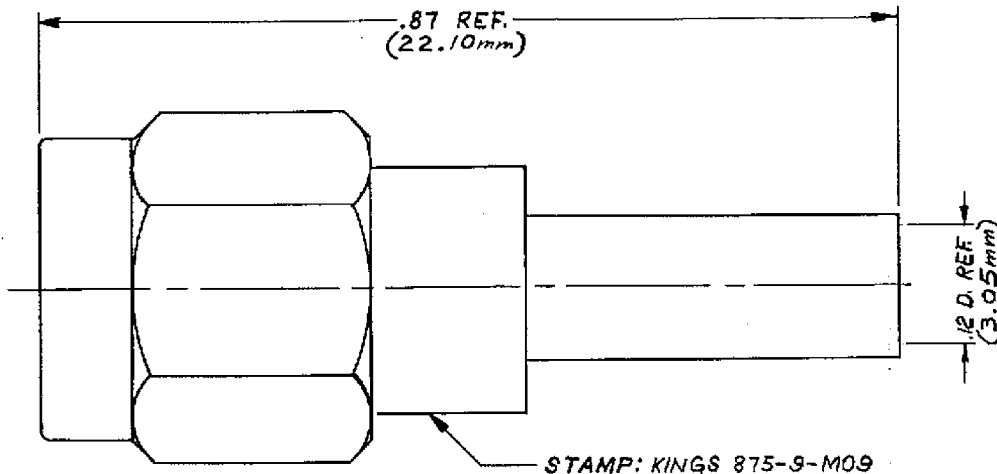

G S N

875-9-M09

NOTES

1. FOR USE WITH M17/119-RG 174 & M17/113-RG 316 CABLE.
2. FOR CABLING INSTRUCTIONS SEE CP-439.
3. FOR CABLE TRIMMING USE KTJ-82 & KTD-121.
4. FOR CRIMPING USE DIE SIZE 21.
5. MATERIAL
 K-GRIP SLEEVE-BRONZE
 CONTACT-BRASS, QQ-B-626
 GASKET-SILICONE RUBBER, ZZ-R-765
 INSULATOR-L-P-403
 ALL OTHER METAL PARTS-BERYLLIUM COPPER, QQ-C-530
6. FINISHES:
 ALL METAL PARTS-HARD GOLD PLATE PER MIL-G-45204

7. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE-50 Ω
 FREQUENCY RANGE-DC TO 12.4GHz

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
 3 PLACE DECIMALS ± .004 ANGLES ± 0°30'
- T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.
6. ALL PLATING IN ACCORDANCE WITH KER 10004.

G S D

REVISIONS

ISSUE	CHANGES
9	CN 24855 A GL 11 OCT 84

G S D

SCALE	
APPROX. SURFACE AREA:	
USED ON:	
REF:	
SMA PLUG	
DRAWN AJ	DATE 10 OCT 84
APPR. MJB	DATE 17 OCT 84
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
YARDING NEW YORK 10007

875-9-M09