



ST280S SERIES

PHASE CONTROL THYRISTORS

Stud Version

Features

- Center amplifying gate
- Hermetic metal case with glass-metal seal insulator
- International standard case TO-209AB (TO-93)
- Threaded studs UNF 3/4 - 16UNF2A or ISO M16x1.5
- Compression Bonded Encapsulation for heavy duty operations such as severe thermal cycling

280A


Typical Applications

- DC motor controls
- Controlled DC power supplies
- AC controllers

Major Ratings and Characteristics

Parameters	ST280S	Units
$I_{T(AV)}$	280	A
@ T_C	85	°C
$I_{T(RMS)}$	440	A
I_{TSM}	7850	A
@ 60Hz	8220	A
I^2t	308	KA ² s
@ 60Hz	281	KA ² s
V_{DRM}/V_{RRM}	400 to 600	V
t_q typical	100	μs
T_J	- 40 to 125	°C

SCR STUD
M16

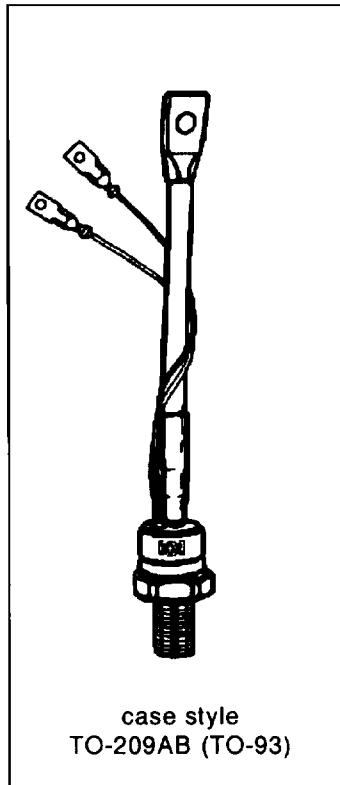

ST280S Series

ELECTRICAL SPECIFICATIONS

Voltage Ratings

Type number	Voltage Code	V_{DRM}/V_{RRM} , max. repetitive peak and off-state voltage V	V_{RSM} , maximum non-repetitive peak voltage V	I_{DRM}/I_{RRM} max. @ $T_J = T_J$ max mA
ST280S	04	400	500	30
	06	600	700	

On-state Conduction

Parameter	ST280S	Units	Conditions
$I_{T(AV)}$ Max. average on-state current @ Case temperature	280	A	180° conduction, half sine wave
	85	°C	
$I_{T(RMS)}$ Max. RMS on-state current	440	A	DC @ 75°C case temperature
I_{TSM} Max. peak, one-cycle non-repetitive surge current	7850	A	t = 10ms t = 8.3ms t = 10ms t = 8.3ms
	8220		
	6600		
	6900		
I^2t Maximum I^2t for fusing	310	KA ² s	No voltage reapplied 100% V_{RRM} reapplied
	220		
	218		
	200		
$I^2\sqrt{t}$ Maximum $I^2\sqrt{t}$ for fusing	3100	KA ² √s	t = 0.1 to 10ms, no voltage reapplied
$V_{T(TO)1}$ Low level value of threshold voltage	0.84	V	(16.7% $\times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)}$, $T_J = T_J$ max.)
$V_{T(TO)2}$ High level value of threshold voltage	0.88		($I > \pi \times I_{T(AV)}$, $T_J = T_J$ max.)
r_{t1} Low level value of on-state slope resistance	0.50	mΩ	(16.7% $\times \pi \times I_{T(AV)} < I < \pi \times I_{T(AV)}$, $T_J = T_J$ max.)
r_{t2} High level value of on-state slope resistance	0.47		($I > \pi \times I_{T(AV)}$, $T_J = T_J$ max.)
V_{TM} Max. on-state voltage	1.28	V	$I_{pk} = 880A$, $T_J = T_J$ max, $t_p = 10ms$ sine pulse
I_H Maximum holding current	600	mA	$T_J = 25^\circ C$, anode supply 12V resistive load
I_L Max. (typical) latching current	1000 (300)		

Switching

Parameter	ST280S	Units	Conditions
di/dt Max. non-repetitive rate of rise of turned-on current	1000	A/μs	Gate drive 20V, 20Ω, $t_r \leq 1\mu s$ $T_J = T_J$ max, anode voltage $\leq 80\%$ V_{DRM}
t_d Typical delay time	1.0	μs	Gate current 1A, $di_g/dt = 1A/\mu s$ $V_d = 0.67\% V_{DRM}$, $T_J = 25^\circ C$
t_q Typical turn-off time	100		$I_{TM} = 300A$, $T_J = T_J$ max, $di/dt = 20A/\mu s$, $V_A = 50V$ $dv/dt = 20V/\mu s$, Gate 0V 100Ω, $t_p = 500\mu s$

Blocking

Parameter	ST280S	Units	Conditions
dv/dt Maximum critical rate of rise of off-state voltage	500	V/ μ s	$T_J = T_{J\max}$ linear to 80% rated V_{DRM}
I_{DRM} Max. peak reverse and off-state leakage current I_{RRM}	30	mA	$T_J = T_{J\max}$, rated V_{DRM}/V_{RRM} applied

Triggering

Parameter	ST280S	Units	Conditions
P_{GM} Maximum peak gate power	10.0	W	$T_J = T_{J\max}$, $t_p \leq 5\text{ms}$
$P_{G(AV)}$ Maximum average gate power	2.0		$T_J = T_{J\max}$, $f = 50\text{Hz}$, $d\% = 50$
I_{GM} Max. peak positive gate current	3.0	A	$T_J = T_{J\max}$, $t_p \leq 5\text{ms}$
+ V_{GM} Maximum peak positive gate voltage	20	V	
- V_{GM} Maximum peak negative gate voltage	5.0		$T_J = T_{J\max}$, $t_p \leq 5\text{ms}$
I_{GT} DC gate current required to trigger	TYP. 180 90 40	MAX. - 150 -	$T_J = -40^\circ\text{C}$ $T_J = 25^\circ\text{C}$ $T_J = 125^\circ\text{C}$ Max. required gate trigger/ current/ voltage are the lowest value which will trigger all units 12V anode-to-cathode applied
V_{GT} DC gate voltage required to trigger	2.9 1.8 1.2	- 3.0 -	
I_{GD} DC gate current not to trigger	10	mA	
V_{GD} DC gate voltage not to trigger	0.25	V	$T_J = T_{J\max}$ Max. gate current/ voltage not to trigger is the max. value which will not trigger any unit with rated V_{DRM} anode-to-cathode applied

Thermal and Mechanical Specification

Parameter	ST280S	Units	Conditions
T_J Max. operating temperature range	-40 to 125	°C	
T_{stg} Max. storage temperature range	-40 to 150		
R_{thJC} Max. thermal resistance, junction to case	0.105	K/W	DC operation
R_{thCS} Max. thermal resistance, case to heatsink	0.04		Mounting surface, smooth, flat and greased
T Mounting torque, $\pm 10\%$	31 (275)	Nm (lbf-in)	Non lubricated threads
	24.5 (210)		Lubricated threads
wt	Approximate weight	280	g
Case style	TO - 209AB (TO-93)	See Outline Table	

ST280S Series

$\Delta R_{th,JC}$ Conduction

(The following table shows the increment of thermal resistance $R_{th,JC}$ when devices operate at different conduction angles than DC)


Conduction angle	Sinusoidal conduction	Rectangular conduction	Units	Conditions
180°	0.016	0.012	K/W	$T_j = T_{j\ max}$
120°	0.019	0.020		
90°	0.025	0.027		
60°	0.036	0.037		
30°	0.060	0.060		

Ordering Information Table

Device Code	ST	28	0	S	06	P	0	V	
	1	2	3	4	5	6	7	8	9
<ul style="list-style-type: none">1 - Thyristor2 - Essential part number3 - 0 = Converter grade4 - S = Compression bonding Stud5 - Voltage code: Code x 100 = V_{RRM} (See Voltage Rating Table)6 - P = Stud base 16UNF threads M = Stud base metric threads (M16 x 1.5)7 - 0 = Eyelet terminals (Gate and Auxiliary Cathode Leads) 1 = Fast - on terminals (Gate and Auxiliary Cathode Leads) 2 = Flag terminals (For Cathode and Gate Terminals)8 - V = Glass-metal seal9 - Critical dv/dt: None = 500V/μsec (Standard selection) L = 1000V/μsec (Special selection)									

Outline Table

GLASS METAL SEAL

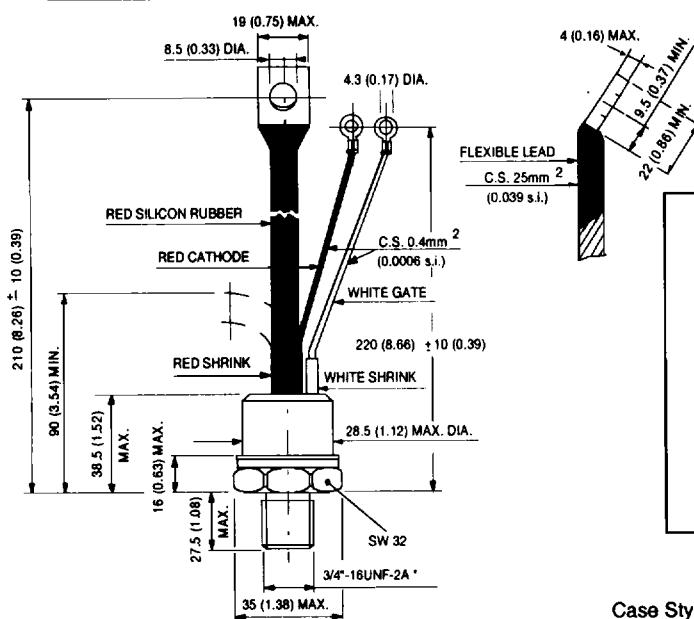


Fast-on Terminals

AMP. 280000-1
REF-250SCR STUD
M7D

Case Style TO-209AB (TO-93)

All dimensions in millimeters (inches)


* FOR METRIC DEVICE : M16 x 1.5 - LENGTH 21 (0.83) MAX.

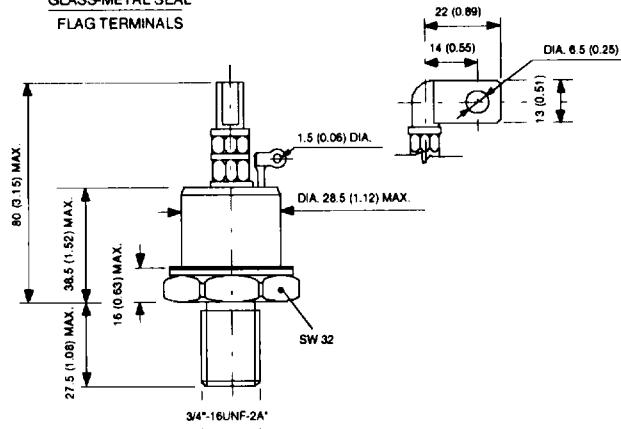GLASS-METAL SEAL
FLAG TERMINALS

*FOR METRIC DEVICE: M16 X 1.5 - LENGTH 21 (0.83) MAX.

Case Style TO-209AB (TO-93) Flag

All dimensions in millimeters (inches)



ST280S Series

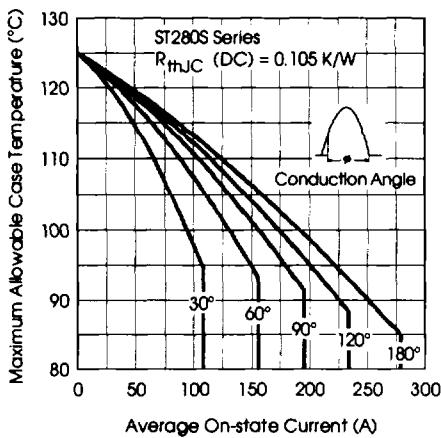


Fig. 1 - Current Ratings Characteristics

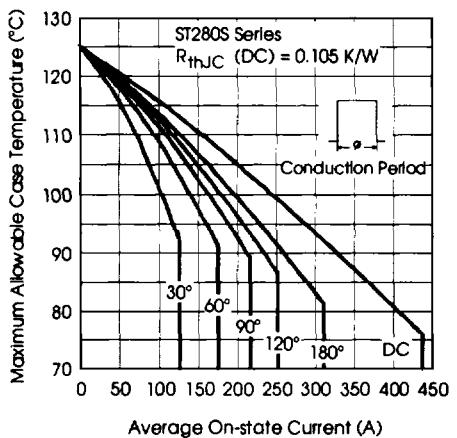


Fig. 2 - Current Ratings Characteristics

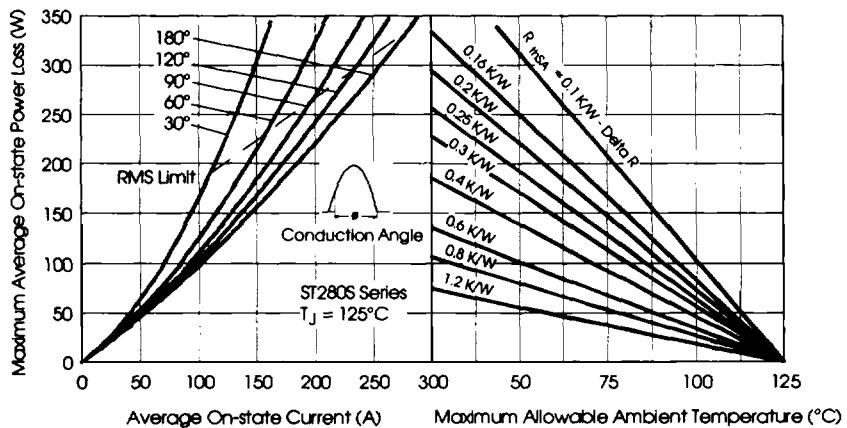


Fig. 3 - On-state Power Loss Characteristics

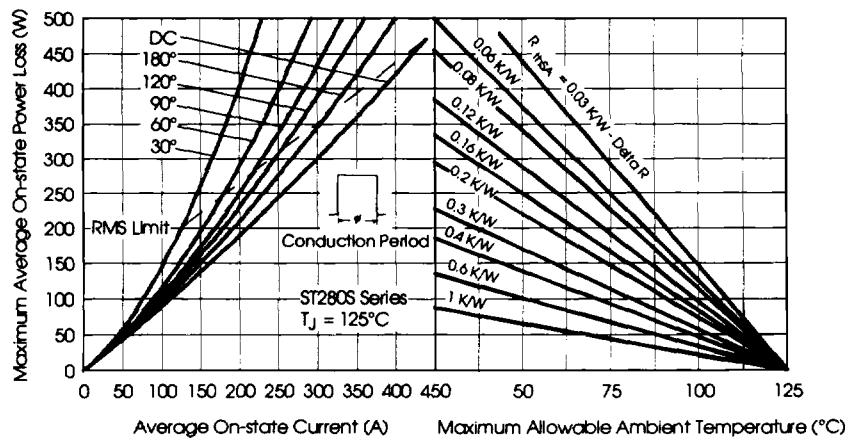


Fig. 4 - On-state Power Loss Characteristics

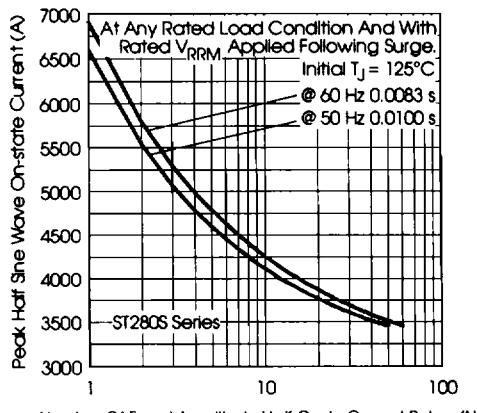


Fig. 5 - Maximum Non-Repetitive Surge Current

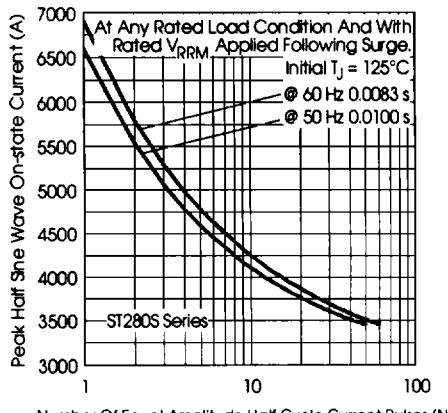


Fig. 6 - Maximum Non-Repetitive Surge Current

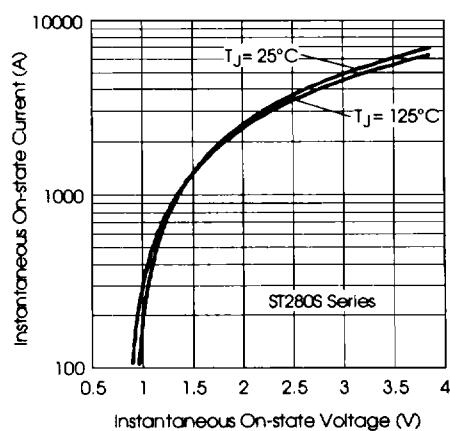


Fig. 7 - On-state Voltage Drop Characteristics

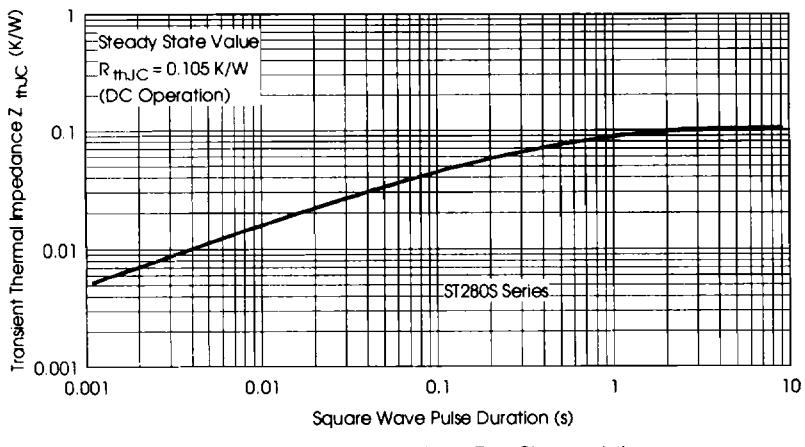


Fig. 8 - Thermal Impedance Z_{thJC} Characteristic

ST280S Series

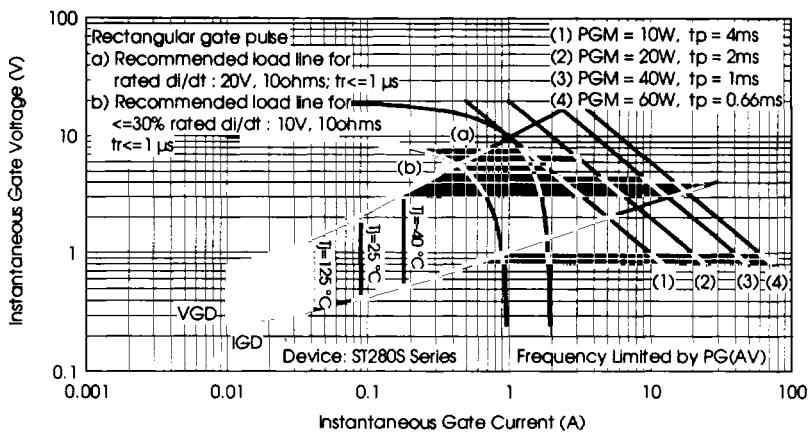


Fig. 9 - Gate Characteristics