

SPECIFICATIONS

Mechanical

Mating Force: 3.0kg (6.6Lb) min.
Unmating Force: 0.3kg (0.66Lb) min.
Durability : 5000 Cycles

Electrical


Voltage Rating: 150V max.
Current Rating: 1A max.
Contact Resistance: 50mΩ max.
Dielectric Withstanding Voltage: 500V
Insulation Resistance: 100MΩ

Physical


Housing: Thermoplastic, UL 94V-0
Contact: Copper alloy
Plating: See "ORDERING INFORMATION"
Metal Spring: Copper alloy
Operating Temperature: -40 to +85

AUDIO JACK Connector

JA Series
T/H Type
3 Bands
Plug ⌀3.5mm
6 Pos.

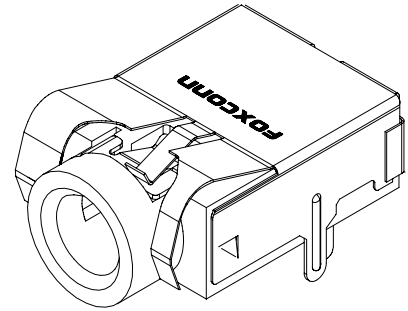

DRAWING

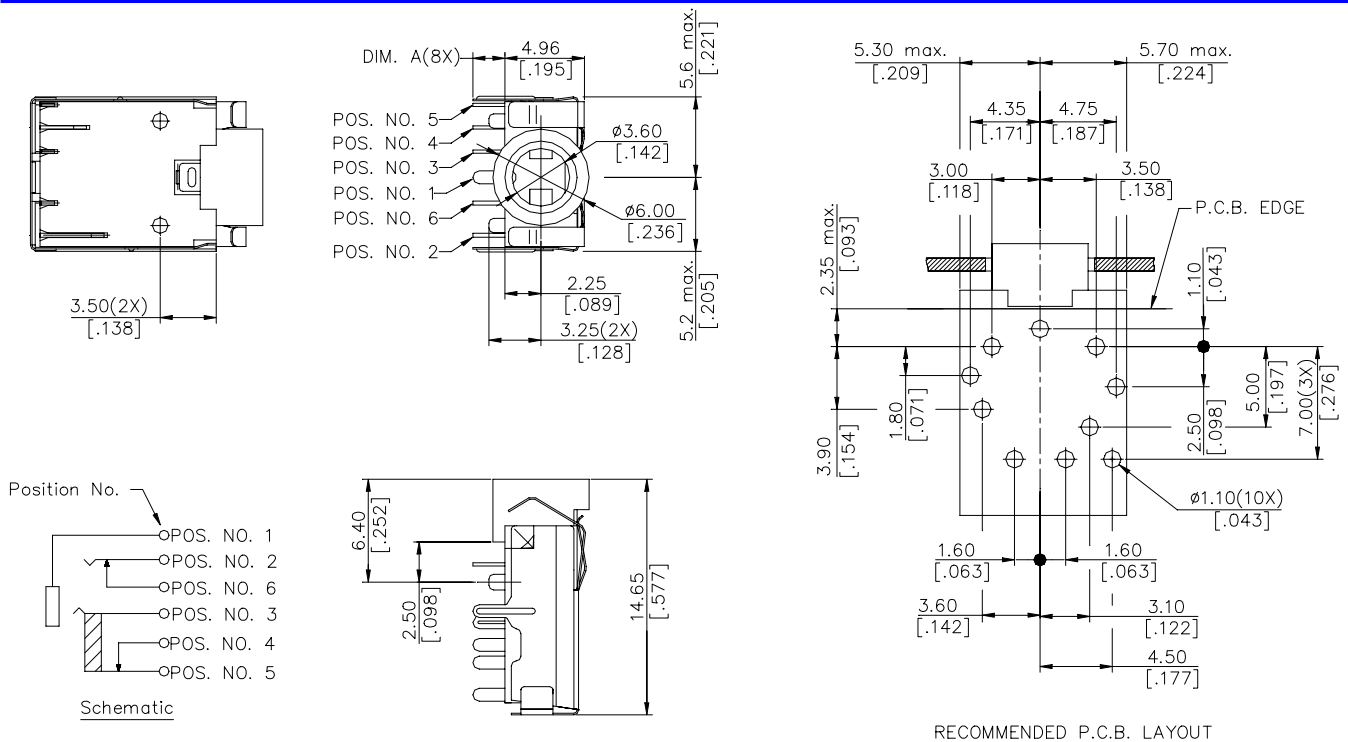

ORDERING INFORMATION

PRODUCT NO.: JA6333L-(W*)1S*-TR

Series Prefix J=Jack
Conn. Series A=Audio Jack
Body&Termination Type 6=Single Port, R/A,
Sleeve Style 3=W/O Bushing
Plug Type 3=3 Band
Plug Diameter 3=3.50 (0.141")
Contact Area Plating L=Pd/Ni + Gold Flash
W=High temperature Plastic

Packing Code TR=Tape Reel
Tail Length 0=2.00mm
 1=2.40mm
 2=1.45mm
W/ Shell
Schematic
Color B=Light Blue
 L=Lime
 O=Orange
 P=Pink

BLACK	JA6333L-1S0-TR	2.00
	JA6333L-1S1-TR	2.40
	JA6333L-1S2-TR	1.45
PINK 701C	JA6333L-WP1S0-TR	2.00
	JA6333L-WP1S1-TR	2.40
	JA6333L-WP1S2-TR	1.45
ORANGE 157C	JA6333L-WO1S0-TR	2.00
	JA6333L-WO1S1-TR	2.40
	JA6333L-WO1S2-TR	1.45
LIME 577C	JA6333L-WL1S0-TR	2.00
	JA6333L-WL1S1-TR	2.40
	JA6333L-WL1S2-TR	1.45
LIGHT BLUE 284C	JA6333L-WB1S0-TR	2.00
	JA6333L-WB1S1-TR	2.40
	JA6333L-WB1S2-TR	1.45
COLOR	P/N	DIM. L