


Established Reliability Mil-Qualified Metal Glaze™ Resistor



RLR Series

- 1/8 watt to 1/2 watt
- TCR of ± 100 ppm/°C
- 1% and 2% tolerance
- 4.3 ohms to 3.01M ohms
- MIL-R-39017 approved to "S" level

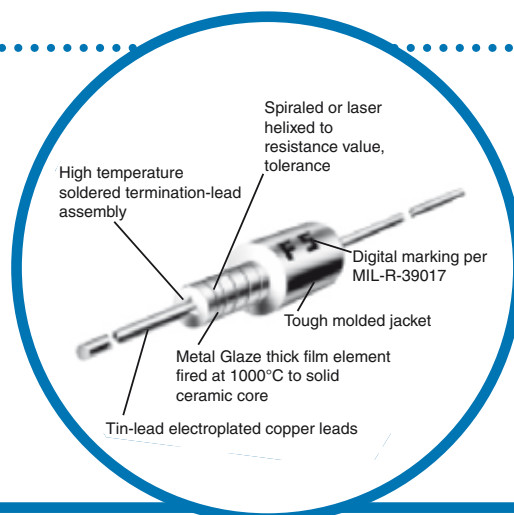

Electrical Data

MIL Type	Marking	Tolerance (±%)	T.C. (ppm/°C)	Power Rating (watts)	Resistance Range (ohms)	Nominal Size	Max Voltage Rating
RLR05/S*	Stamp	1, 2	100	1/8 @ 70°C	10 to 301K	1/8W	200
RLR07/S	Stamp	1, 2	100	1/4 @ 70°C	10 to 3.01M	1/4W	250
RLR20/S	Stamp	1, 2	100	1/2 @ 70°C	4.3 to 3.01M	1/2W	350

* Conformally coated construction on all 1/8 nominal sizes.

Environmental Data

Test Conditions	MIL-R-22684 Test Limits Allowed	RL07 Max. %ΔR (±3σ)
Temperature Coefficient (ppm/°C)	±100	±100
Low Temperature Operation	±0.25%	±0.05%
Thermal Shock	±0.25%	±0.15%
Moisture Resistance	±1.00%	±0.50%
Short Time Overload	±0.50%	±0.15%
Load Life (70°C --- 1/4W) 1000 hours	±4.00%	±0.50%
Terminal Strength	±0.25%	±0.05%
Effect of Soldering	±0.25%	±0.10%
Shock	±0.50%	±0.05%
Vibration	±0.50%	±0.05%
High Temperature Exposure (150°C No Load)	±2.00%	±0.50%
Temperature Rise @ 1/4W Power Load	-	See Temperature Rise Chart
Dielectric Strength	±0.25%	±0.05%

ESTABLISHED RELIABILITY MIL SPECIFICATIONS: RLR products listed above are qualified to the appropriate established reliability MIL Specification. In general, Metal Glaze units such as these are specified for all RLR requirements.


General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.




www.bitechnologies.com www.irctt.com www.welwyn-tt.com

Physical Data

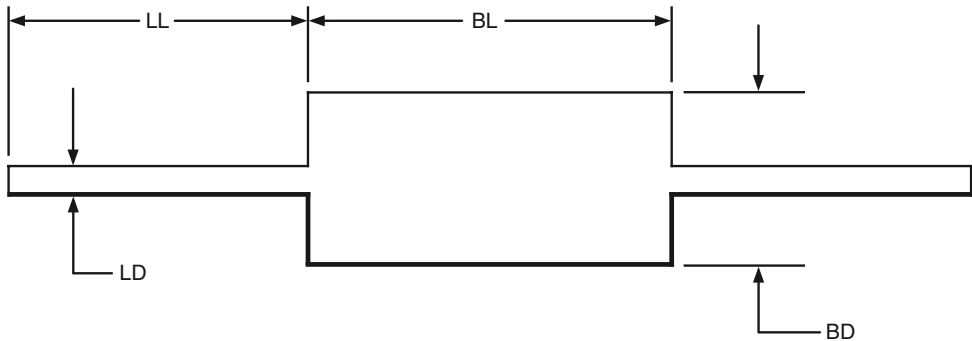					
Dimensions (Inches and (mm))					
Nominal Size	Body Length BL	Body Diameter BD	Lead Length LL	Lead Diameter LD	Clean Lead
1/8 watt	0.150 ±0.020 (3.8 ±0.5)	0.066 ±0.008 (1.7 ±0.2)	1.00 ±0.125 (25.4 ±3.2)	0.016 ±0.002 (0.41 ±0.05)	0.187 (4.7)
1/4 watt	0.250 ±0.015 (6.4 ±0.4)	0.090 ±0.008 (2.3 ±0.2)	1.50 ±0.125 (38.1 ±3.2)	0.025 ±0.002 (0.64 ±0.05)	0.300 (7.6)
1/2 watt	0.390 ±0.010 (9.9 ±0.3)	0.140 ±0.008 (3.6 ±0.2)	1.50 ±0.125 (38.1 ±3.2)	0.032 ±0.002 (0.81 ±0.05)	0.450 (11.4)

MIL Spec. Power Derating Chart

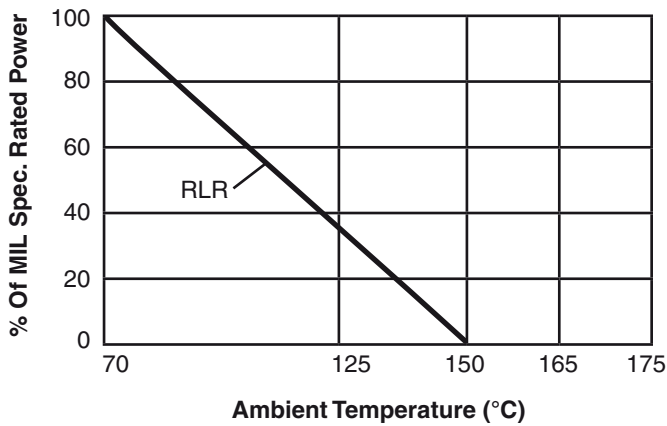

Ordering Data

Sample Part No.	RLR	20	C	1001	F	S
MIL Style •						
RL = Fixed Film Resistor. Established reliability.						
Power Rating •						
05 = 1/8 watt 07 = 1/4 watt 20 = 1/2 watt						
Lead Material •						
C = Solderable/weldable leads						
Resistance •						
First three digits represent significant figures; fourth digit is number of zeros.						
Tolerance •						
F = ±1%, G = ±2%						
Failure Rate •						
S = 0.001% for 1000 hours (60% confidence)						

General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.