



**Dual Enhancement Mode Field Effect Transistor (N and P Channel)****PRODUCT SUMMARY (N-Channel)**

VDSS	ID	RDS(ON) (mΩ) Max
100V	2.0A	216 @ VGS=10V
		328 @ VGS=4.5V

PRODUCT SUMMARY (P-Channel)

VDSS	ID	RDS(ON) (mΩ) Max
-100V	-1.3A	547 @ VGS=-10V
		614 @ VGS=-4.5V

**ABSOLUTE MAXIMUM RATINGS** ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter		N-Channel	P-Channel	Units
V _{DS}	Drain-Source Voltage		100	-100	V
V _{GS}	Gate-Source Voltage		±20	±20	V
I _D	Drain Current-Continuous ^a	T _C =25°C	2.0	-1.3	A
		T _C =70°C	1.6	-1.0	A
I _{DM}	-Pulsed ^b		7.2	-4.7	A
E _{AS}	Sigle Pulse Avalanche Energy ^d		16	25	mJ
P _D	Maximum Power Dissipation ^a	T _C =25°C	2		W
		T _C =70°C	1.28		W
T _J , T _{STG}	Operating Junction and Storage Temperature Range		-55 to 150		°C

THERMAL CHARACTERISTICS

$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient ^a	62.5	$^{\circ}\text{C/W}$
-----------------	--	------	----------------------

N-Channel ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	100			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =80V , V _{GS} =0V			1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	1.0	1.7	3	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =10V , I _D =1.0A		173	216	m ohm
		V _{GS} =4.5V , I _D =0.8A		243	328	m ohm
g _{FS}	Forward Transconductance	V _{DS} =10V , I _D =1.0A		2		S
DYNAMIC CHARACTERISTICS [°]						
C _{iss}	Input Capacitance	V _{DS} =25V,V _{GS} =0V f=1.0MHz		305		pF
C _{OSS}	Output Capacitance			36		pF
C _{RSS}	Reverse Transfer Capacitance			23		pF
SWITCHING CHARACTERISTICS [°]						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =50V I _D =1A V _{GS} =10V R _{GEN} = 6 ohm		7.5		ns
t _r	Rise Time			8.2		ns
t _{D(OFF)}	Turn-Off Delay Time			16		ns
t _f	Fall Time			4		ns
Q _g	Total Gate Charge	V _{DS} =50V,I _D =1A,V _{GS} =10V		5.5		nC
		V _{DS} =50V,I _D =1A,V _{GS} =4.5V		3.2		nC
Q _{gs}	Gate-Source Charge	V _{DS} =50V,I _D =1A, V _{GS} =10V		0.95		nC
Q _{gd}	Gate-Drain Charge			1.7		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
V _{SD}	Diode Forward Voltage ^b	V _{GS} =0V,I _S =2.0A		0.83	1.3	V

STM102D

Ver 1.0

P-Channel ELECTRICAL CHARACTERISTICS (T_C=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
OFF CHARACTERISTICS						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =-250uA	-100			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-80V , V _{GS} =0V			-1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} = ±20V , V _{DS} =0V			±100	nA
ON CHARACTERISTICS						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250uA	-1.0	-1.8	-3	V
R _{DS(ON)}	Drain-Source On-State Resistance	V _{GS} =-10V , I _D =-0.65A		438	547	m ohm
		V _{GS} =-4.5V , I _D =-0.6A		455	614	m ohm
g _{FS}	Forward Transconductance	V _{DS} =-10V , I _D =-0.65A		3.6		S
DYNAMIC CHARACTERISTICS [°]						
C _{ISS}	Input Capacitance	V _{DS} =-25V,V _{GS} =0V f=1.0MHz		840		pF
C _{OSS}	Output Capacitance			47		pF
C _{RSS}	Reverse Transfer Capacitance			29		pF
SWITCHING CHARACTERISTICS [°]						
t _{D(ON)}	Turn-On Delay Time	V _{DD} =-50V I _D =-0.65A V _{GS} =-10V R _{GEN} = 6 ohm		12		ns
t _r	Rise Time			12		ns
t _{D(OFF)}	Turn-Off Delay Time			48		ns
t _f	Fall Time			9		ns
Q _g	Total Gate Charge	V _{DS} =-50V,I _D =-0.65A,V _{GS} =-10V		15		nC
		V _{DS} =-50V,I _D =-0.65A,V _{GS} =-4.5V		7		nC
Q _{gs}	Gate-Source Charge	V _{DS} =-50V,I _D =-0.65A,		1.5		nC
Q _{gd}	Gate-Drain Charge	V _{GS} =-10V		2.9		nC
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
V _{SD}	Diode Forward Voltage ^b	V _{GS} =0V,I _S =-3A		-0.86	-1.3	V

Notes

- a.Surface Mounted on FR4 Board, t ≤ 10sec.
b.Pulse Test:Pulse Width ≤ 300us, Duty Cycle ≤ 2%.
c.Guaranteed by design, not subject to production testing.
d.Starting T_J=25°C, L=0.5mH, V_{DD} = 20V, V_{GS}=10V.(See Figure13)

Nov,30,2011

N-Channel

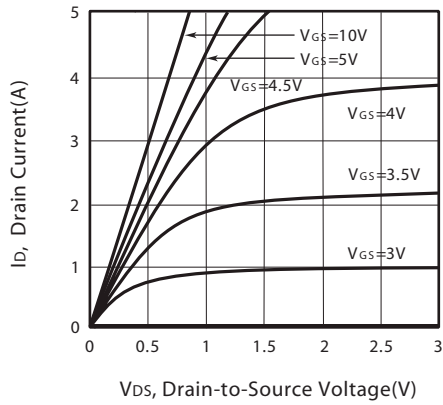


Figure 1. Output Characteristics

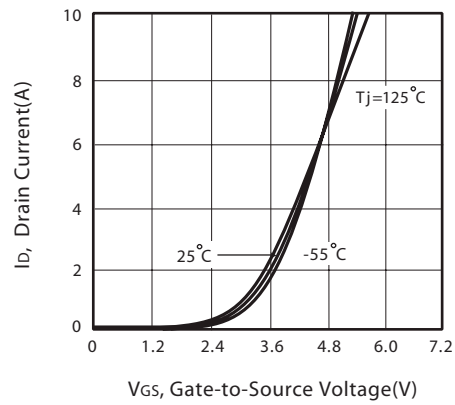


Figure 2. Transfer Characteristics

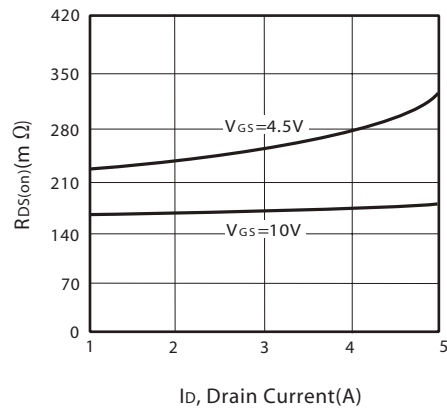


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

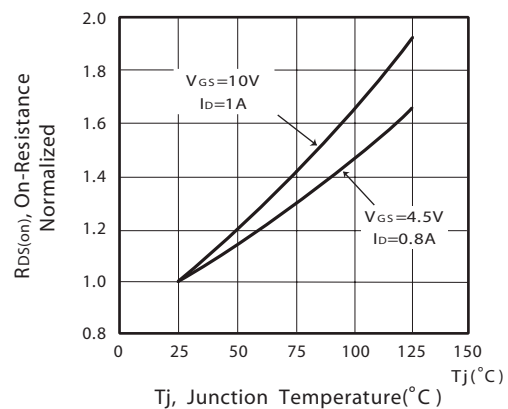


Figure 4. On-Resistance Variation with Drain Current and Temperature

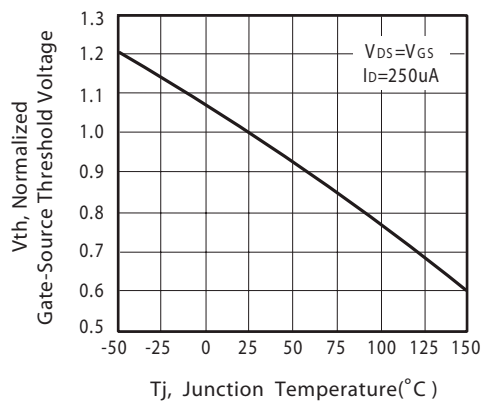


Figure 5. Gate Threshold Variation with Temperature

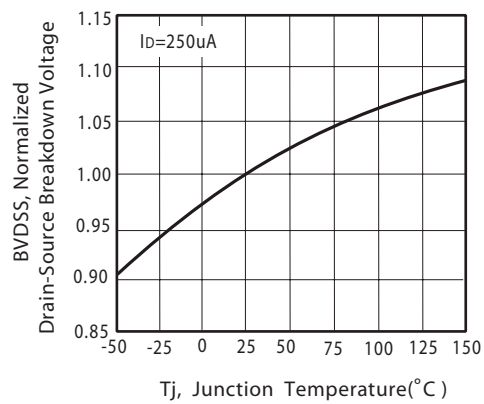


Figure 6. Breakdown Voltage Variation with Temperature

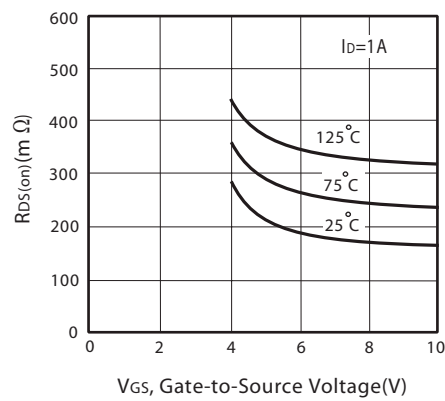


Figure 7. On-Resistance vs. Gate-Source Voltage

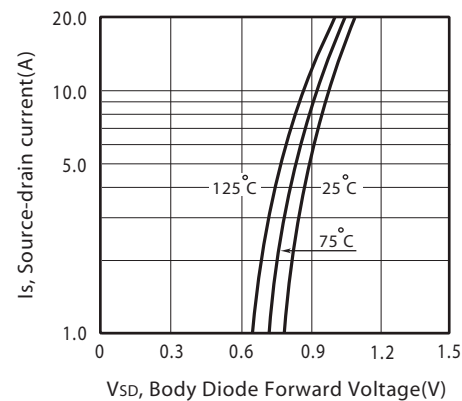


Figure 8. Body Diode Forward Voltage Variation with Source Current

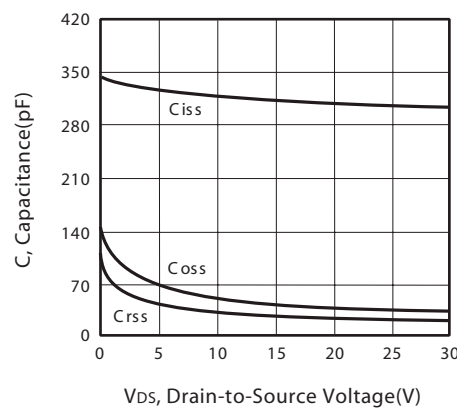


Figure 9. Capacitance

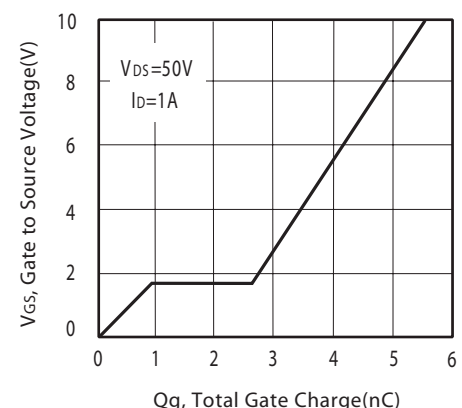


Figure 10. Gate Charge

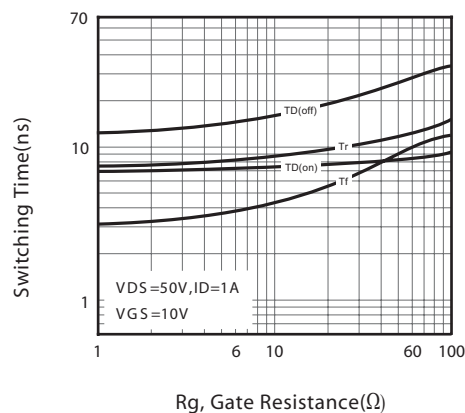


Figure 11. switching characteristics



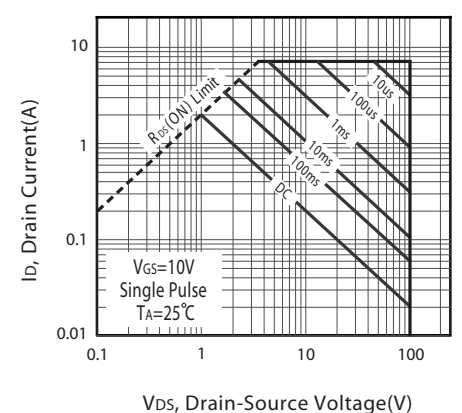


Figure 12. Maximum Safe Operating Area

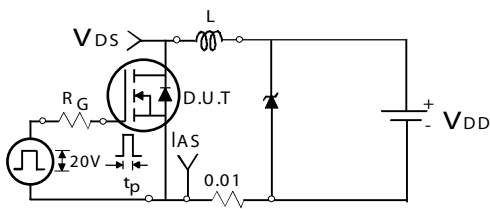


Unclamped Inductive Test Circuit

Figure 13a.

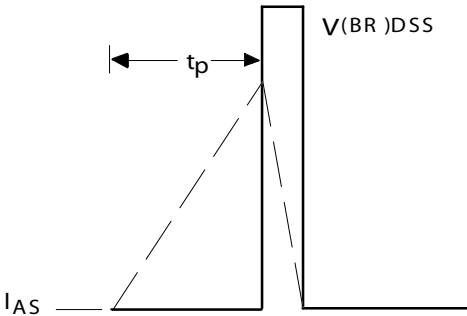

Unclamped Inductive Waveforms

Figure 13b.

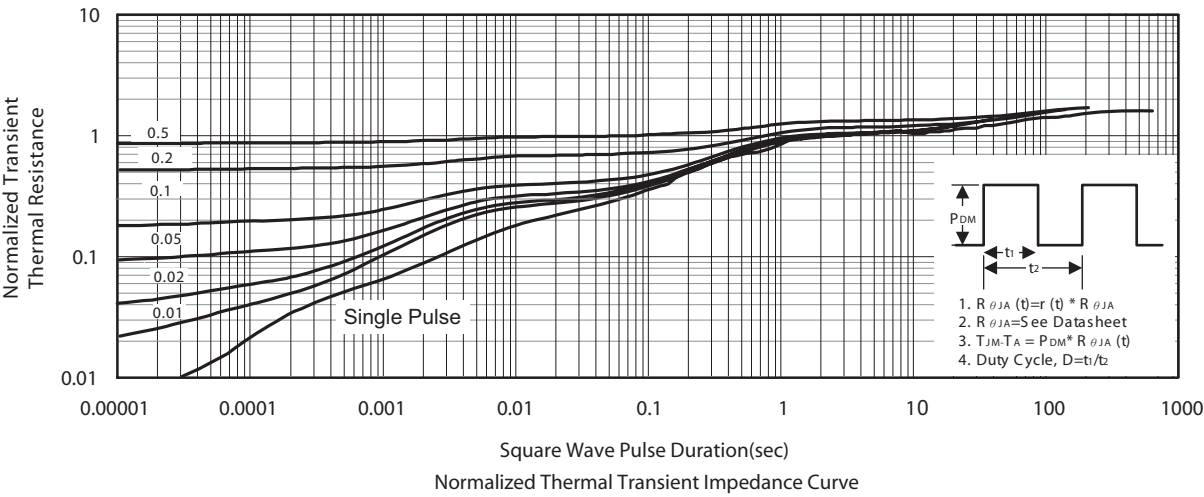

P-Channel

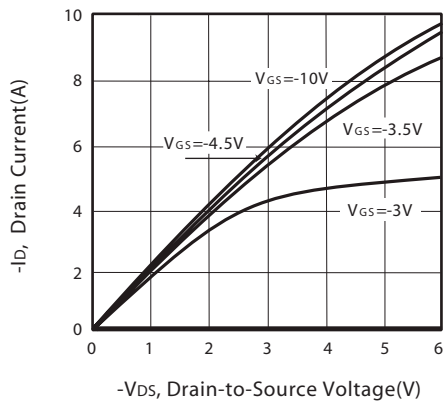


Figure 1. Output Characteristics

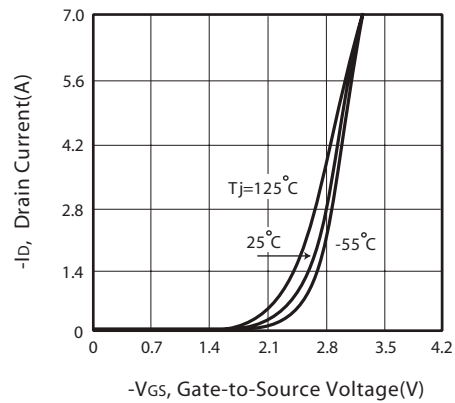


Figure 2. Transfer Characteristics

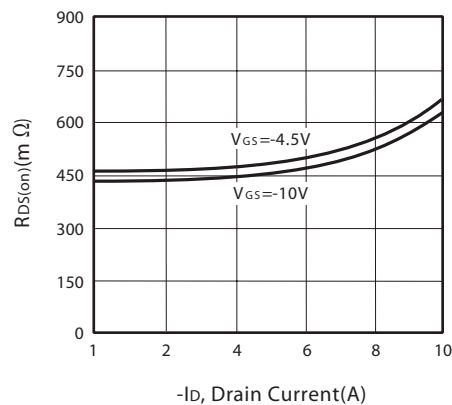


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

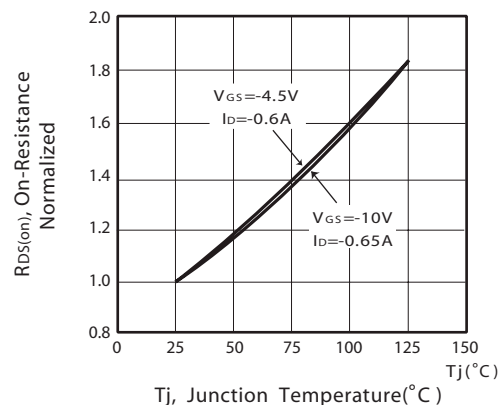


Figure 4. On-Resistance Variation with Drain Current and Temperature

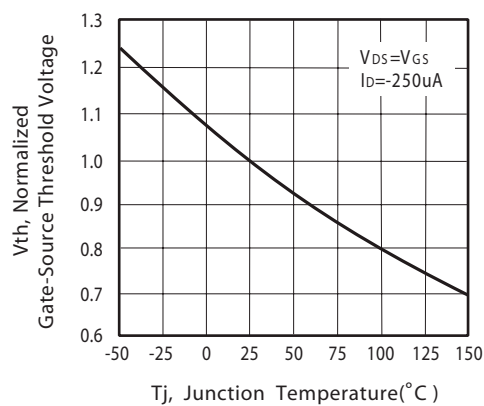


Figure 5. Gate Threshold Variation with Temperature

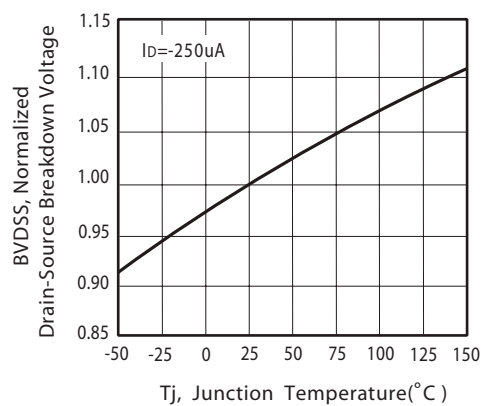


Figure 6. Breakdown Voltage Variation with Temperature

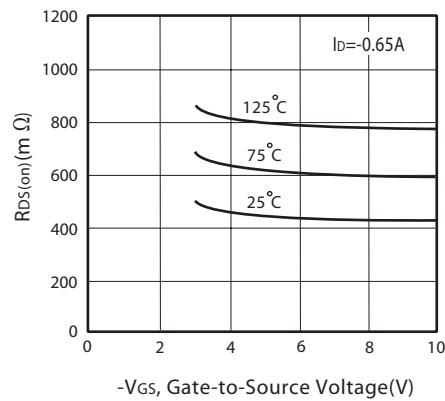


Figure 7. On-Resistance vs. Gate-Source Voltage

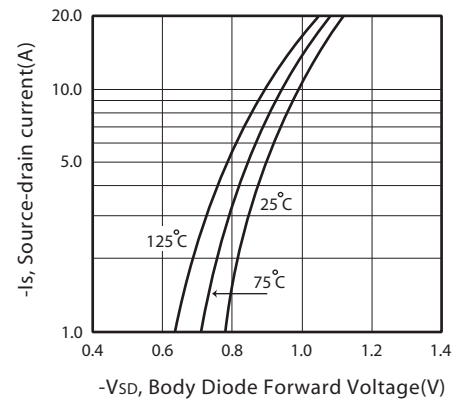


Figure 8. Body Diode Forward Voltage Variation with Source Current

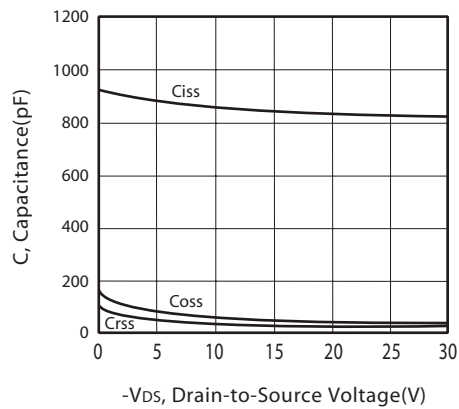


Figure 9. Capacitance

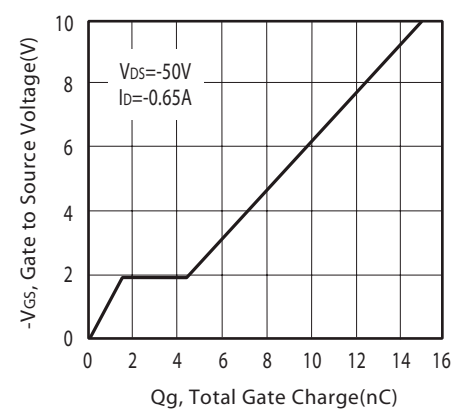


Figure 10. Gate Charge

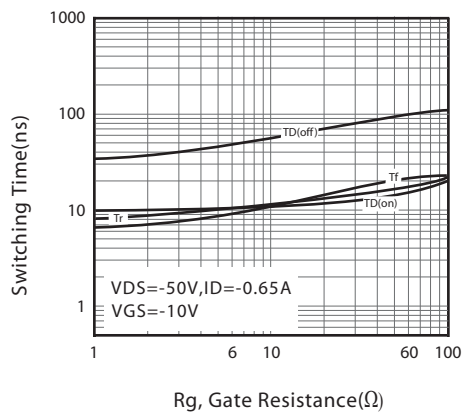


Figure 11. switching characteristics



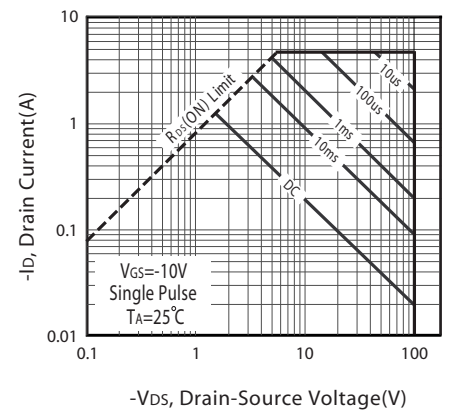


Figure 12. Maximum Safe Operating Area

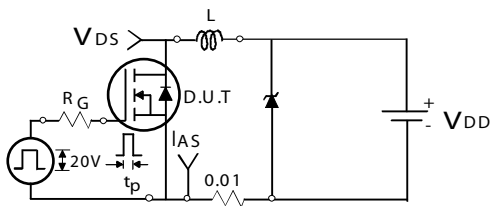


Unclamped Inductive Test Circuit

Figure 13a.

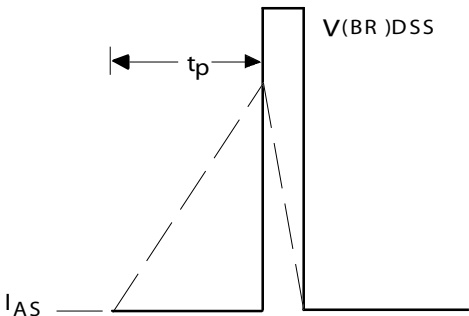


Unclamped Inductive Waveforms

Figure 13b.

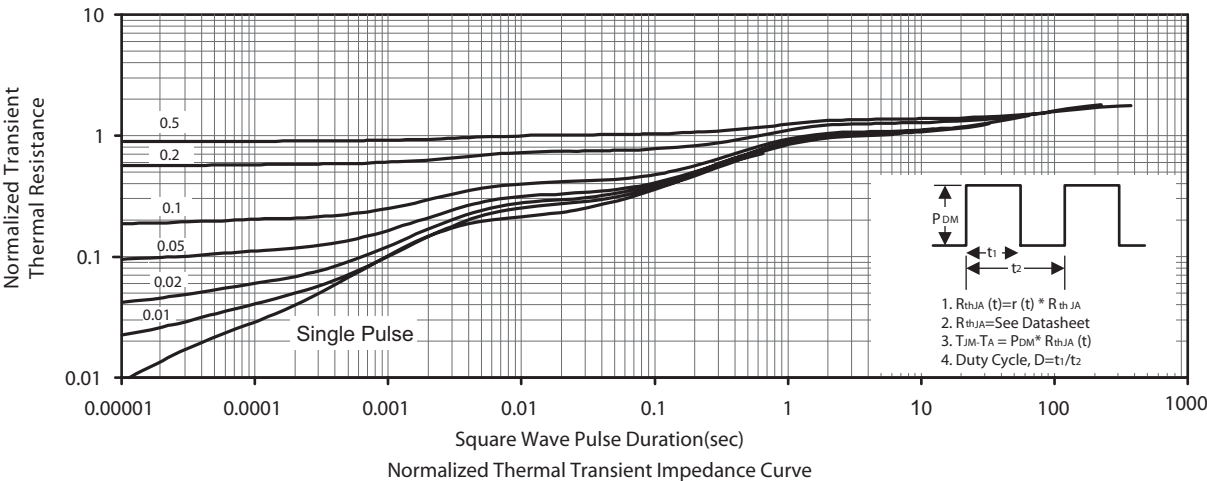

PACKAGE OUTLINE DIMENSIONS


SO-8

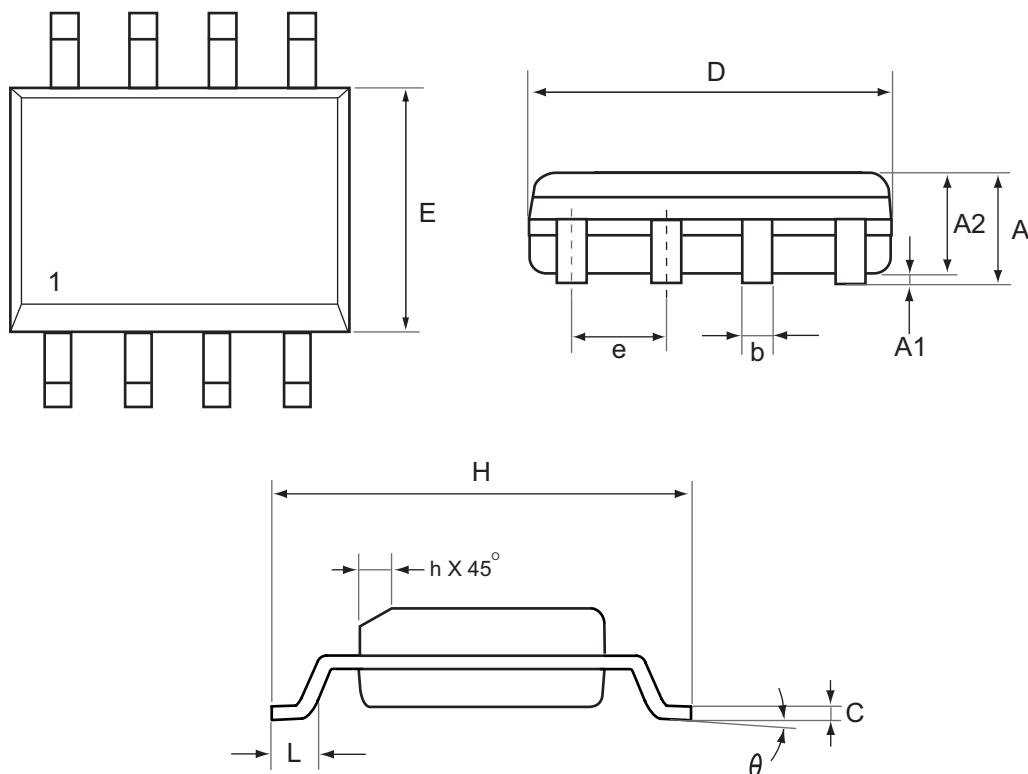

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.35	1.75	0.053	0.069
A1	0.10	0.25	0.004	0.010
A2	1.25	1.63	0.049	0.064
b	0.31	0.51	0.012	0.020
C	0.17	0.25	0.007	0.010
D	4.80	5.00	0.189	0.197
E	3.70	4.00	0.146	0.157
e	1.27 REF.		0.050 BSC	
H	5.80	6.20	0.228	0.244
L	0.40	1.27	0.016	0.050
θ	0°	8°	0°	8°
h	0.25	0.50	0.010	0.020

SO-8 Tape and Reel Data


SO-8 Carrier Tape

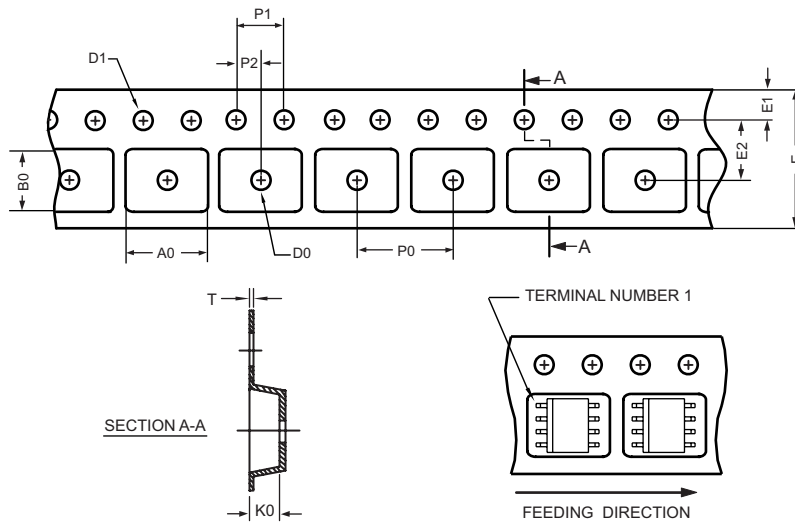

unit:mm

PACKAGE	A0	B0	K0	D0	D1	E	E1	E2	P0	P1	P2	T
SOP 8N 150mil	6.50 ±0.15	5.25 ±0.10	2.10 ±0.10	φ 1.5 (MIN)	φ 1.55 ±0.10	12.0 +0.3 - 0.1	1.75 ±0.10	5.5 ±0.10	8.0 ±0.10	4.0 ±0.10	2.0 ±0.10	0.30 ±0.013

SO-8 Reel

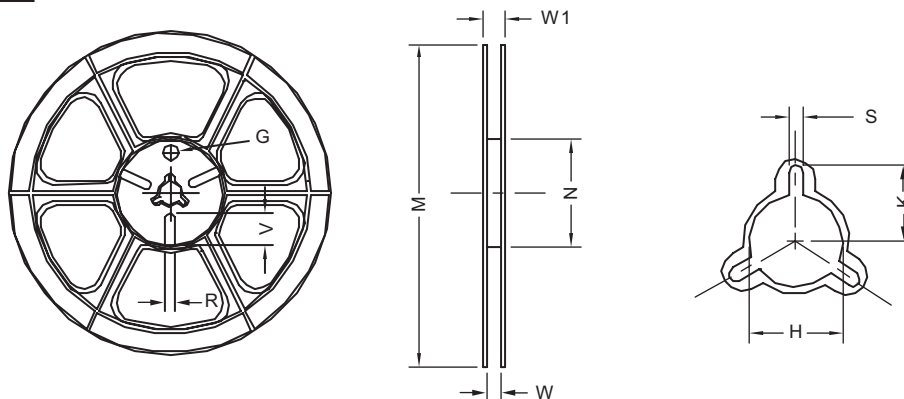

UNIT:mm

TAPE SIZE	REEL SIZE	M	N	W	W1	H	K	S	G	R	V
12 mm	φ 330	330 ± 1	62 ±1.5	12.4 + 0.2	16.8 - 0.4	φ 12.75 + 0.15	---	2.0 ±0.15	---	---	---