

**PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION**

**Part Number:** [35328-0560](#)  
**Status:** **Active**  
**Description:** 7.92mm Pitch Header, Vertical, Positive Lock, Shrouded, 5 Circuits, White, PA Polyamide (Nylon) 6/6, Glass-filled

**Documents:**

[3D Model](#) [Packaging Specification PK-35328-001 \(PDF\)](#)  
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)  
[Product Specification PS-35156-005 \(PDF\)](#)

**Agency Certification**


|     |           |
|-----|-----------|
| CSA | LR19980   |
| TUV | R72081037 |
| UL  | E29179    |

**General**

|                |                       |
|----------------|-----------------------|
| Product Family | PCB Headers           |
| Series         | <a href="#">35328</a> |
| Application    | Power, Wire-to-Board  |
| Product Name   | N/A                   |
| UPC            | 822348697656          |

**Physical**

|                                |                 |
|--------------------------------|-----------------|
| Breakaway                      | No              |
| Circuits (Loaded)              | 5               |
| Circuits (maximum)             | 5               |
| Color - Resin                  | Natural         |
| Durability (mating cycles max) | 30              |
| First Mate / Last Break        | No              |
| Flammability                   | 94V-0           |
| Glow-Wire Compliant            | No              |
| Guide to Mating Part           | No              |
| Keying to Mating Part          | None            |
| Lock to Mating Part            | Yes             |
| Material - Plating Mating      | Tin             |
| Material - Plating Termination | Tin             |
| Material - Resin               | Nylon           |
| Net Weight                     | 2.040/g         |
| Number of Rows                 | 1               |
| Orientation                    | Vertical        |
| PC Tail Length                 | 3.40mm          |
| PCB Locator                    | No              |
| PCB Retention                  | None            |
| PCB Thickness - Recommended    | 1.60mm          |
| Packaging Type                 | Bag             |
| Pitch - Mating Interface       | 7.92mm          |
| Plating min - Mating           | 5.080µm         |
| Plating min - Termination      | 5.080µm         |
| Polarized to Mating Part       | Yes             |
| Polarized to PCB               | No              |
| Shrouded                       | Partial         |
| Stackable                      | No              |
| Surface Mount Compatible (SMC) | Yes             |
| Temperature Range - Operating  | -40°C to +105°C |
| Termination Interface: Style   | Through Hole    |

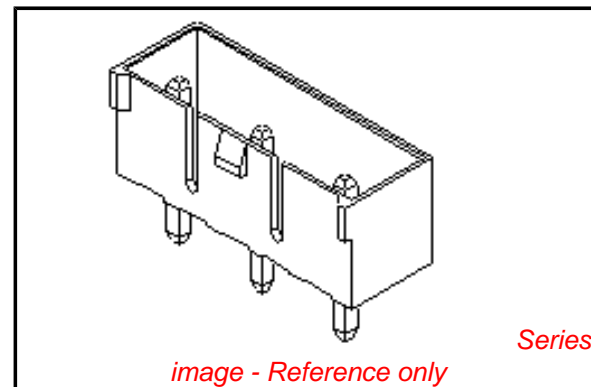

**EU RoHS**

**ELV and RoHS Compliant**  
**REACH SVHC**  
**Contains SVHC: No**  
**Low-Halogen Status**  
**Not Low-Halogen**

**China RoHS**



**Need more information on product environmental compliance?**

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)  
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

**Search Parts in this Series**

[35328Series](#)

**Mates With**

[35156 Wire-to-Board Housing](#)

**Electrical**

Current - Maximum per Contact

7A

Voltage - Maximum

250V

**Material Info****Reference - Drawing Numbers**

Packaging Specification

PK-35328-001

Product Specification

PS-35156-005

Sales Drawing

SD-35328-001

This document was generated on 07/08/2014

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**