



## SB620 SERIES

### ISOLATION SCHOTTKY BARRIER RECTIFIERS

**VOLTAGE** 20 to 60 Volts    **CURRENT** 6.0 Amperes

**TO-220AC**


Unit : inch(mm)

#### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Exceeds environmental standards of MIL-S-19500/228
- Low power loss, high efficiency.
- Low forward voltage, high current capability
- High surge capacity.
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications.
- In compliance with EU RoHS 2002/95/EC directives

#### MECHANICAL DATA

- Case: TO-220AC molded plastic package
- Terminals: Lead solderable per MIL-STD-750, Method 2026
- Polarity: As marked.
- Mounting Position: Any
- Weight: 0.055 ounces, 1.5615 grams.

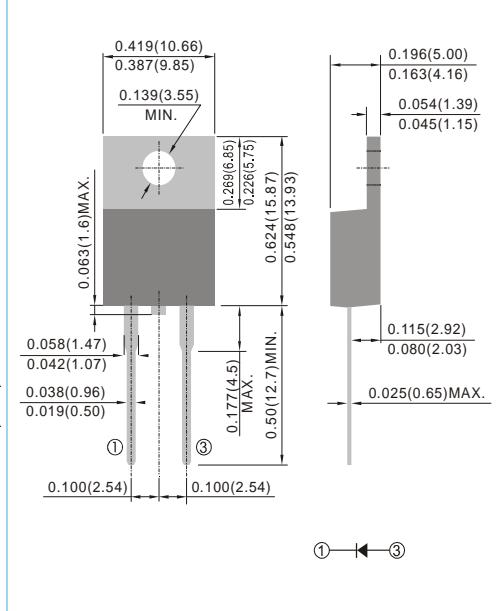

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

PARAMETER	SYMBOL	SB620	SB630	SB640	SB650	SB660	UNITS		
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	V		
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	V		
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	V		
Maximum Average Forward Current at $T_c=75^\circ C$	$I_{F(AV)}$	6.0					A		
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	$I_{FSM}$	75					A		
Maximum Forward Voltage at 6.0A	$V_F$	0.55			0.70		V		
Maximum DC Reverse Current at Rated DC Blocking Voltage $T_j=25^\circ C$ $T_j=100^\circ C$	$I_R$	0.2 15					mA		
Typical Thermal Resistance	$R_{\theta JC}$	3					$^\circ C / W$		
Operating Junction Temperature Range	$T_J$	-55 to +125	-55 to +150			$^\circ C$			
Storage Temperature Range	$T_{STG}$	-55 to +150					$^\circ C$		

#### NOTE:

Both Bonding and Chip structure are available.



## SB620 SERIES

### RATING AND CHARACTERISTIC CURVES

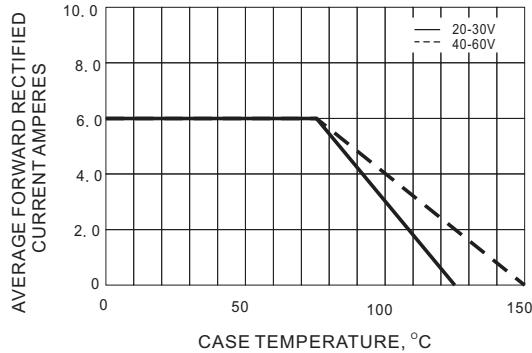


Fig.1- FORWARD CURRENT DERATING CURVE

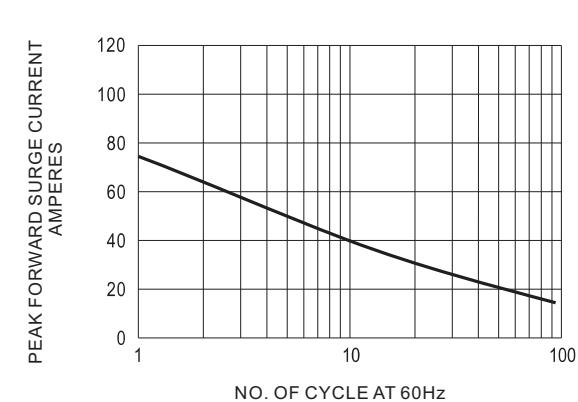


Fig.2-MAXIMUM NON-REPETITIVE SURGE CURRENT

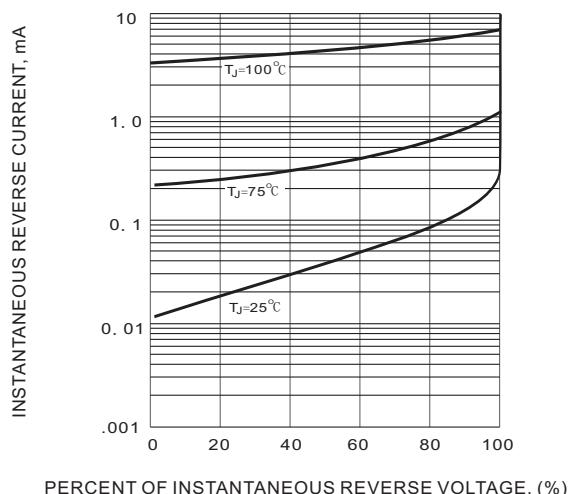


Fig.3-TYPICAL REVERSE CHARACTERISTIC

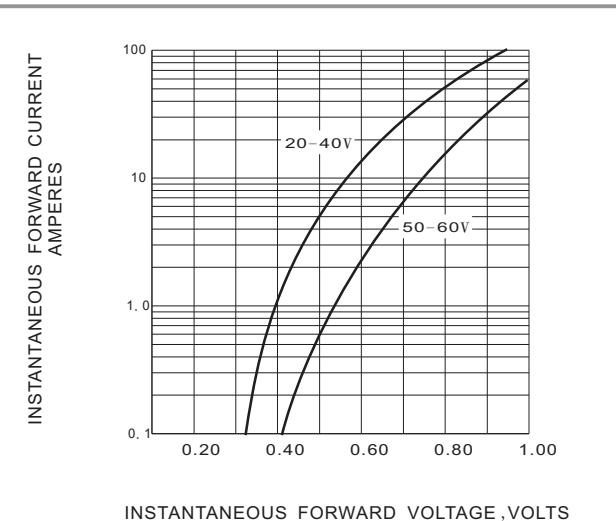


Fig.4-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC