



# SK22A-SK215A

## 2.0AMP.Surface Mount Schottky Barrier Rectifiers




### Features

- ◊ For surface mounted application
- ◊ Metal to silicon rectifier, majority carrier conduction
- ◊ Low forward voltage drop
- ◊ Easy pick and place
- ◊ High surge current capability
- ◊ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ◊ Epitaxial construction
- ◊ High temperature soldering:  
260°C / 10 seconds at terminals

### Mechanical Data

- ◊ Case: Molded plastic
- ◊ Terminals: Pure tin plated, lead free.
- ◊ Polarity: Indicated by cathode band
- ◊ Packaging: 12mm tape
- ◊ Weight: 0.064gram

### SMA/DO-214AC

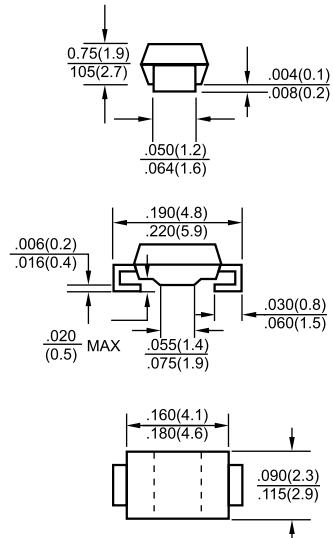

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SK 22A	SK 23A	SK 24A	SK 25A	SK 26A	SK 29A	SK 210A	SK 215A	Units
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	30	40	50	60	90	100	150	V
Maximum RMS Voltage	V <sub>RMS</sub>	14	21	28	35	42	63	70	105	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	30	40	50	60	90	100	150	V
Maximum Average Forward Rectified Current at T <sub>L</sub> (See Fig. 1)	I <sub>(AV)</sub>	2.0							A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method )	I <sub>FSM</sub>	50							A	
Maximum Instantaneous Forward Voltage (Note 1) @ 2.0A	V <sub>F</sub>	0.5		0.7		0.85		0.95		V
Maximum DC Reverse Current @ T <sub>A</sub> = 25 °C at Rated DC Blocking Voltage @ T <sub>A</sub> = 125 °C	I <sub>R</sub>	0.5			0.1			mA		mA
		10		5.0		2.0				
Non-repetitive Peak Reverse Avalanche Energy L=40mH T <sub>j</sub> =25 °C max prior to Surge, Inductive load Switched off	E <sub>RSRM</sub>	20							mJ	
Typical Junction Capacitance	C <sub>j</sub>	10			50			pF		
Typical Thermal Resistance ( Note 2 )	R <sub>θJA</sub>	88							°C/W	
Operating Temperature Range	T <sub>j</sub>	-65 to +125			-65 to +150			°C		
Storage Temperature Range	T <sub>STG</sub>	-65 to +150							°C	

Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle  
2. Measured on P.C.Board with 0.2" x 0.2"(5.0mm x 5.0mm) Copper Pad Areas.

# SK22A-SK215A

## 2.0AMP.Surface Mount Schottky Barrier Rectifiers

### RATINGS AND CHARACTERISTIC CURVES (SK22A THRU SK215A)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

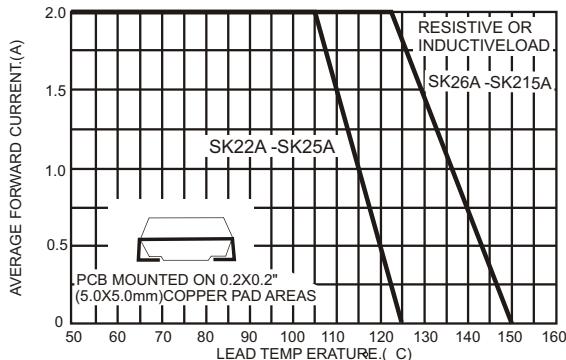


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

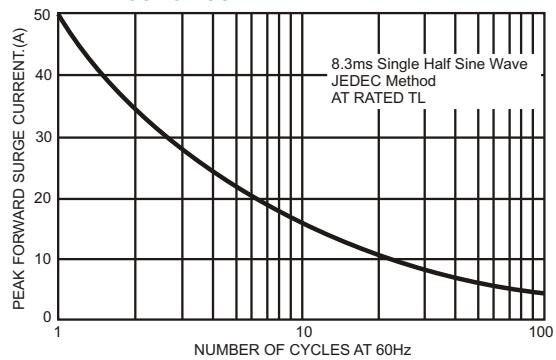


FIG. 3- TYPICAL FORWARD CHARACTERISTICS

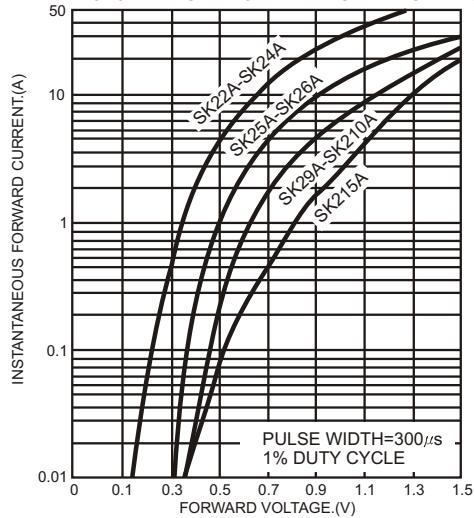


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

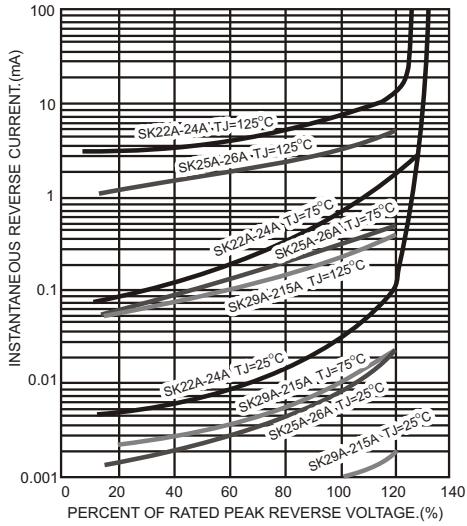


FIG. 5- TYPICAL JUNCTION CAPACITANCE

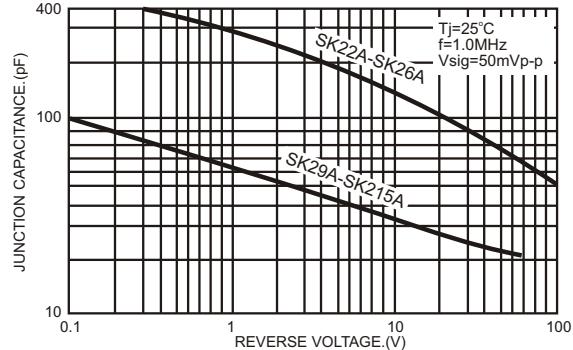


FIG. 6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

