



**ESD protected N-Channel Enhancement Mode MOSFET**

# MTNK5C3

$BV_{DSS}$	30V
$I_D$	100mA
$R_{DS(on)(MAX)}$	$8\Omega$

**Description**

- Low voltage drive(2.5V drive) makes this device ideal for portable equipment.
- High speed switching
- ESD protected device
- Pb-free lead plating & halogen-free package

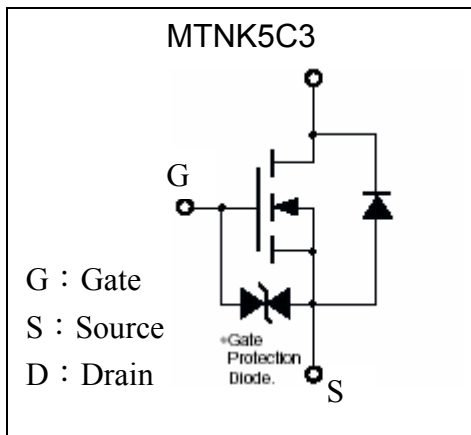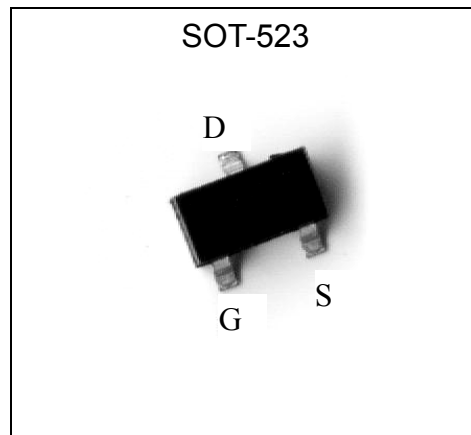**Symbol**

**Outline**

**Absolute Maximum Ratings** ( $T_a=25^\circ\text{C}$ )

Parameter		Symbol	Limits	Unit
Drain-Source Voltage		$BV_{DSS}$	30	V
Gate-Source Voltage		$V_{GS}$	$\pm 20$	V
Drain Current	Continuous	$I_D$	$\pm 100$	mA
	Pulsed	$I_{DP}$	$\pm 200$ *1	mA
Reverse Drain Current	Continuous	$I_{DR}$	$\pm 100$	mA
	Pulsed	$I_{DRP}$	$\pm 200$ *1	mA
Total Power Dissipation		$P_D$	150 *2	mW
ESD susceptibility			750 *3	V
Operating Junction and Storage Temperature Range		$T_j ; T_{stg}$	$-55 \sim +150$	$^\circ\text{C}$
Thermal Resistance, Junction-to-Ambient		$R_{th,ja}$	833	$^\circ\text{C/W}$

- Note : \*1. Pulse Width  $\leq 10\mu\text{s}$ , Duty cycle  $\leq 1\%$   
 \*2. With each pin mounted on the recommended lands.  
 \*3. Human body model,  $1.5\text{k}\Omega$  in series with  $100\text{pF}$



**Electrical Characteristics (Ta=25°C)**

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
<b>Static</b>					
BV <sub>DSS</sub>	30	-	-	V	V <sub>GS</sub> =0, I <sub>D</sub> =100μA
V <sub>GS(th)</sub>	0.8	1.3	1.5	V	V <sub>DS</sub> =3V, I <sub>D</sub> =100μA
I <sub>GSS</sub>	-	-	±1	μA	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0
I <sub>DSS</sub>	-	-	100	nA	V <sub>DS</sub> =30V, V <sub>GS</sub> =0
R <sub>DSON</sub>	-	3.4	8	Ω	V <sub>GS</sub> =4V, I <sub>D</sub> =10mA
	-	6.9	13		V <sub>GS</sub> =2.5V, I <sub>D</sub> =1mA
GFS	20	50	-	mS	V <sub>DS</sub> =3V, I <sub>D</sub> =10mA
<b>Dynamic</b>					
C <sub>iss</sub>	-	12.5	-	pF	V <sub>DS</sub> =5V, V <sub>GS</sub> =0, f=1MHz
C <sub>oss</sub>	-	7.3	-		
C <sub>rss</sub>	-	3.5	-		
t <sub>d(on)</sub>	-	15	-	ns	V <sub>DD</sub> ≐ 5V, I <sub>D</sub> =10mA, V <sub>GS</sub> =5V, R <sub>L</sub> =500Ω, R <sub>G</sub> =10Ω
t <sub>r</sub>	-	35	-		
t <sub>d(off)</sub>	-	75	-		
t <sub>f</sub>	-	75	-		
<b>Source-Drain Diode</b>					
*V <sub>SD</sub>	-	0.88	1.2	V	V <sub>GS</sub> =0V, I <sub>S</sub> =100mA

\*Pulse Test : Pulse Width ≤300μs, Duty Cycle ≤2%


**Ordering Information**

Device	Package	Shipping	Marking
MTNK5C3	SOT-523 (Pb-free lead plating & halogen-free package)	3000 pcs / Tape & Reel	KN




### Typical Characteristics


Typical Output Characteristics

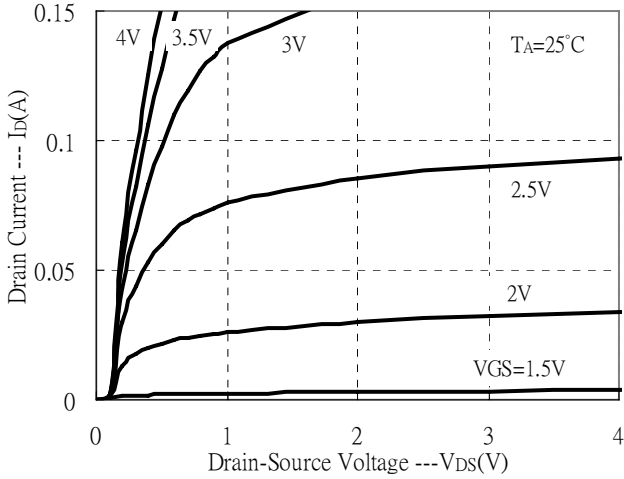


Gate Threshold Voltage vs Channel Temperature

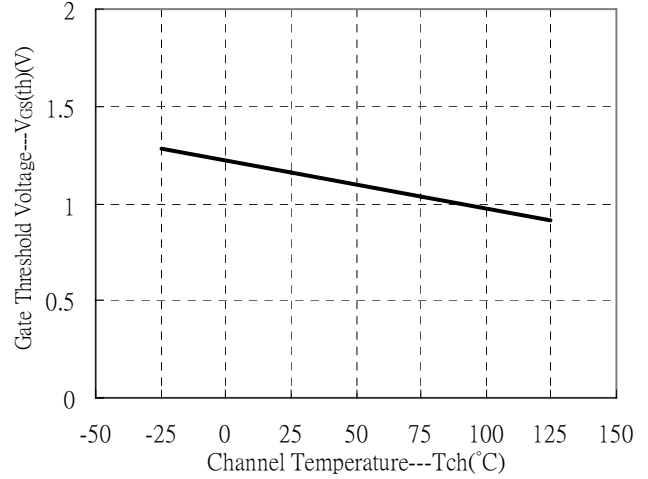


Typical Transfer Characteristics

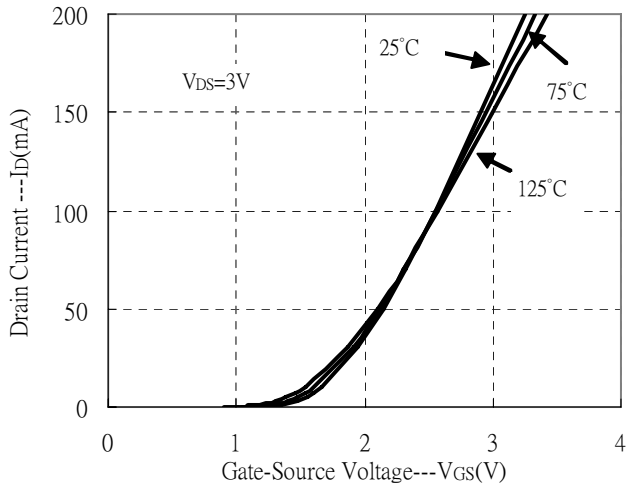


Static Drain-Source On-state Resistance with Temperature

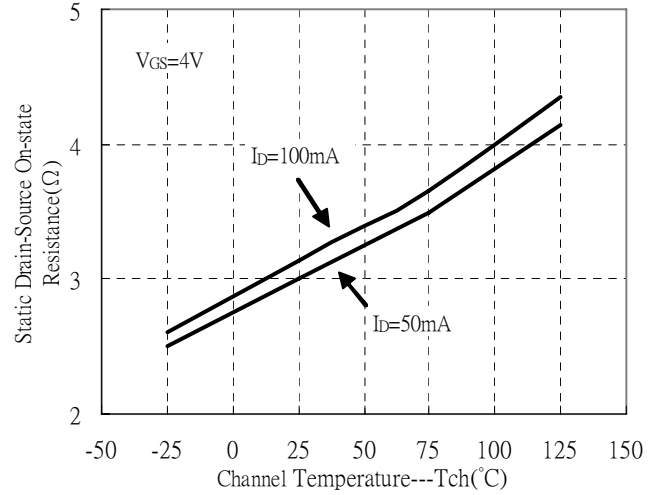

Static Drain-Source On-State resistance vs Drain Current

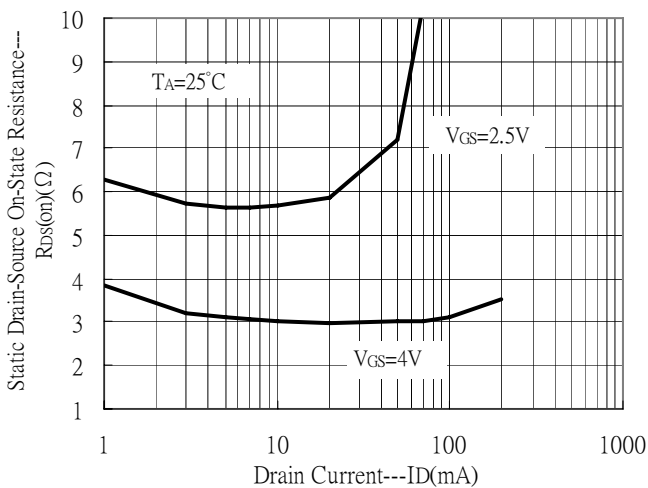


Static Drain-Source On-State resistance vs Drain Current

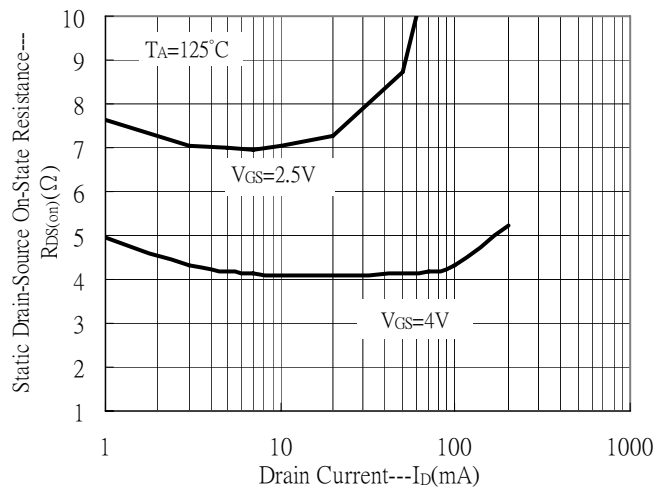


**Typical Characteristics(Cont.)**


Static Drain-Source On-State Resistance vs Drain Current

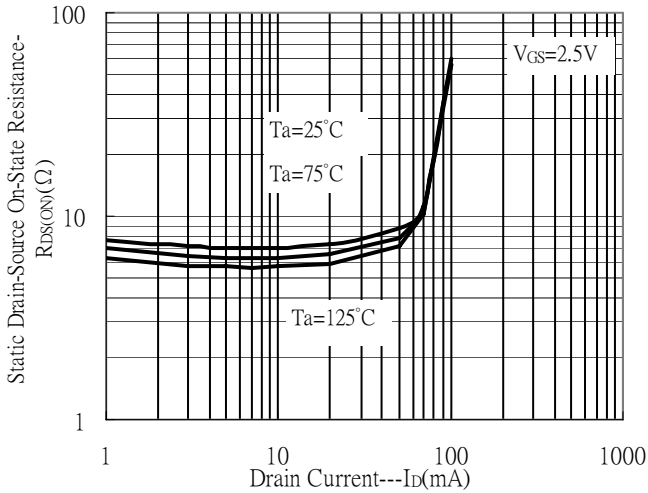


Static Drain-Source On-State Resistance vs Drain Current

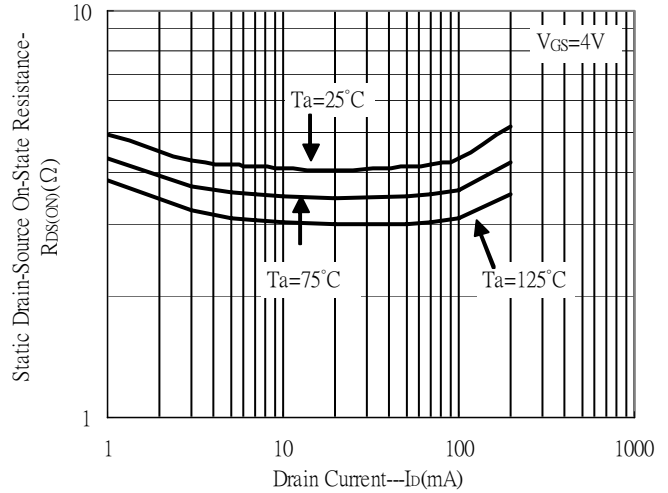


Static Drain-Source On-State Resistance vs Gate-Source Voltage

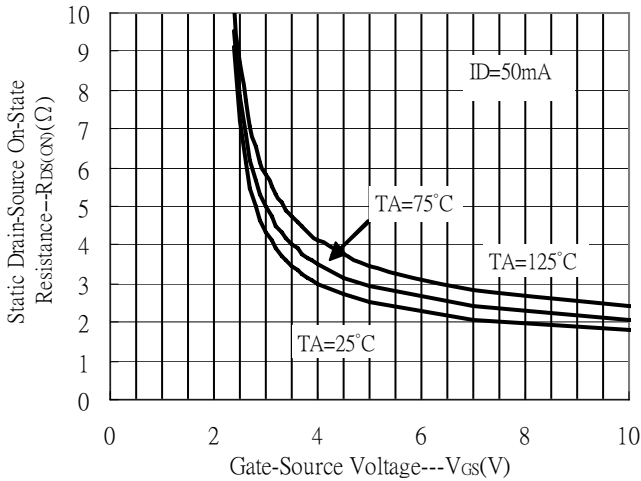


Static Drain-Source On-State Resistance vs Gate-Source Voltage

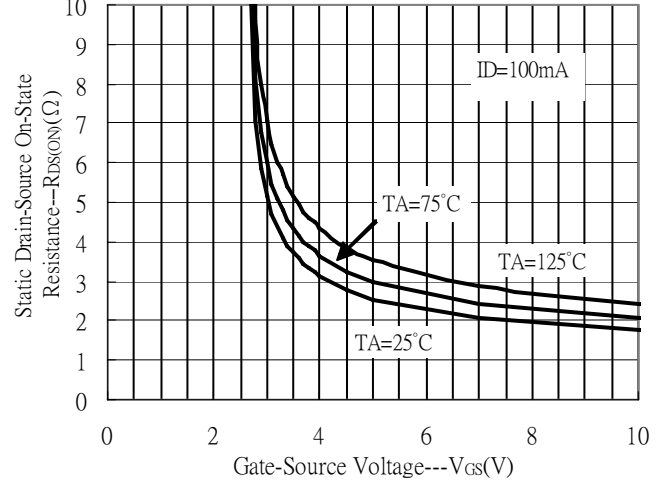

Reverse Drain Current vs Source-Drain Voltage(I)


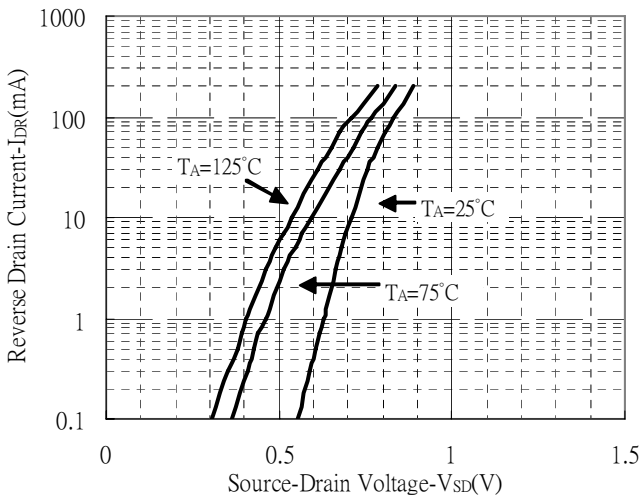


Reverse Drain Current vs Source-Drain Voltage(II)

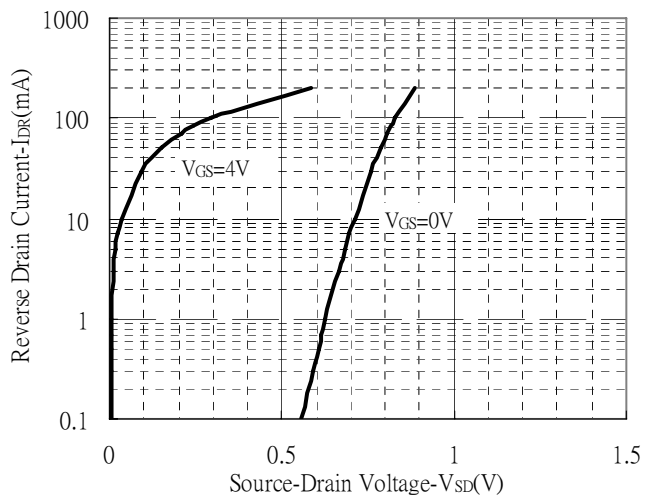





### Typical Characteristics(Cont.)

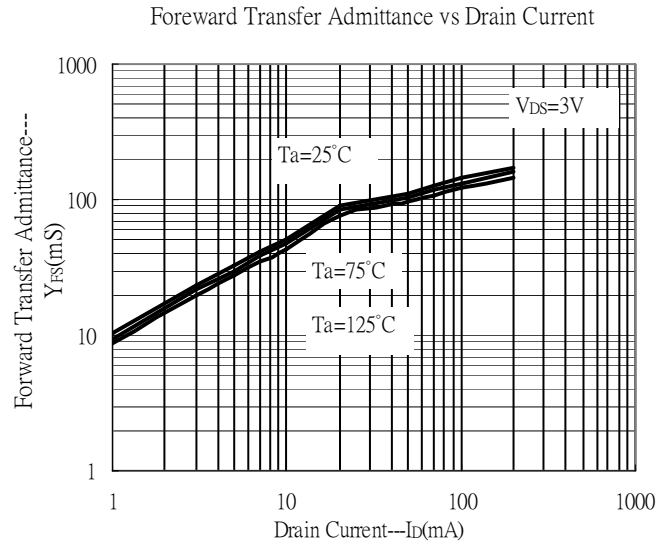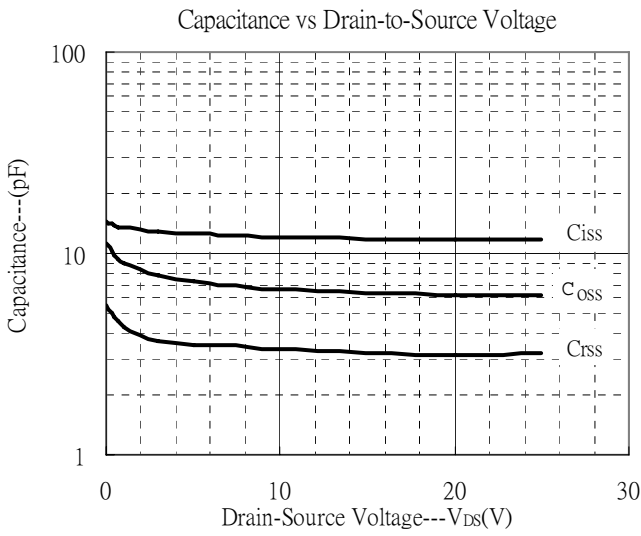

**Reel Dimension**

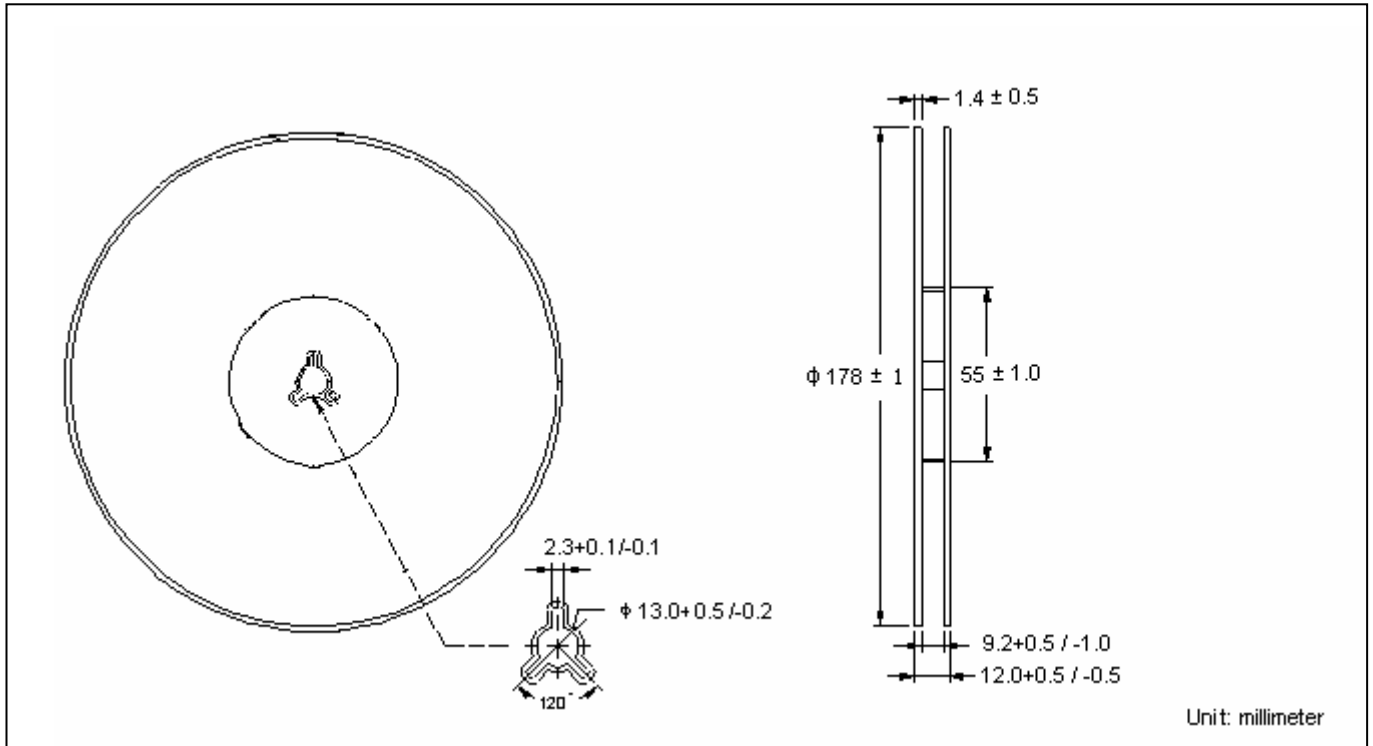


**Carrier Tape Dimension**

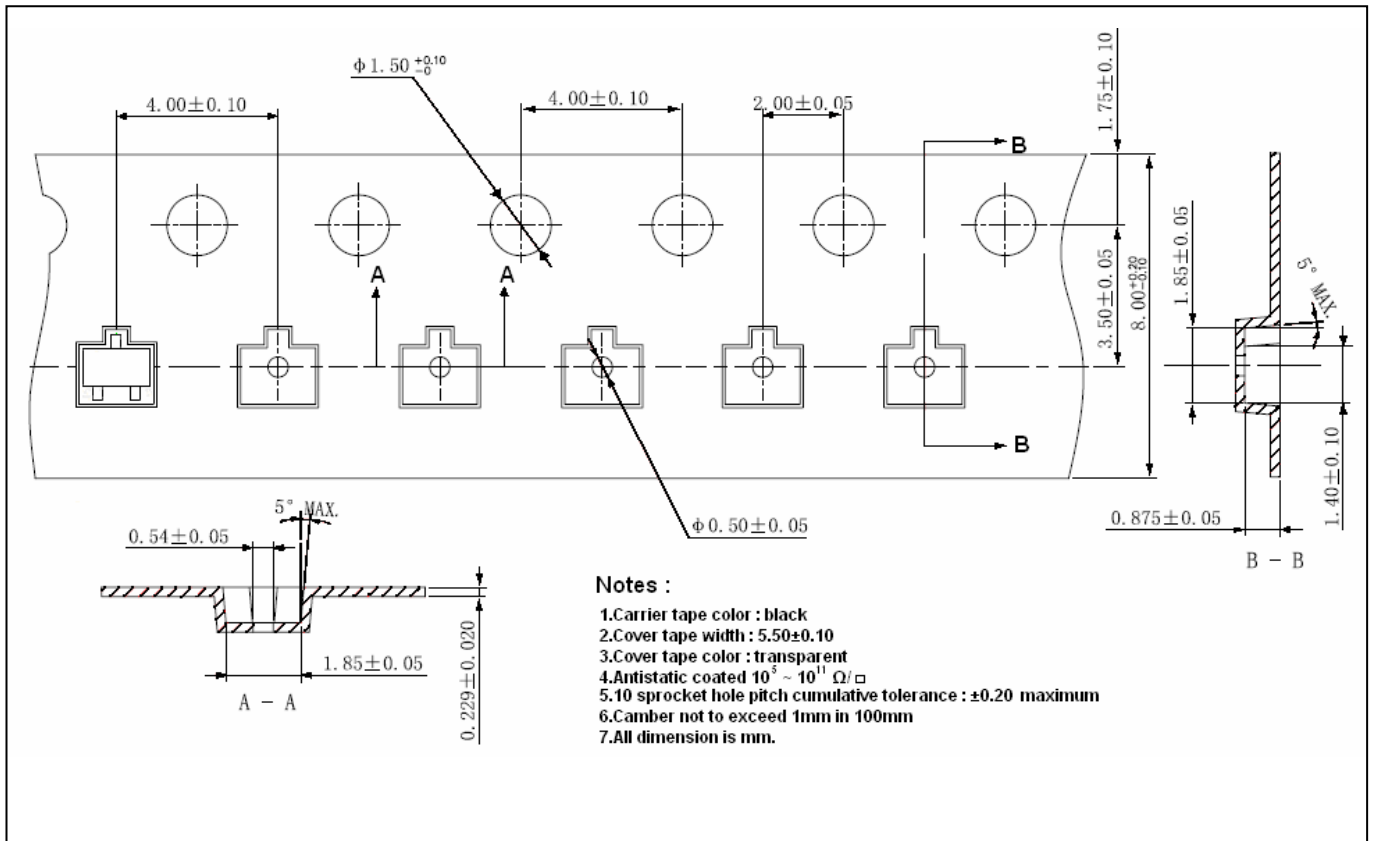

**Recommended wave soldering condition**

Product	Peak Temperature	Soldering Time
Pb-free devices	260 +0/-5 °C	5 +1/-1 seconds


**Recommended temperature profile for IR reflow**

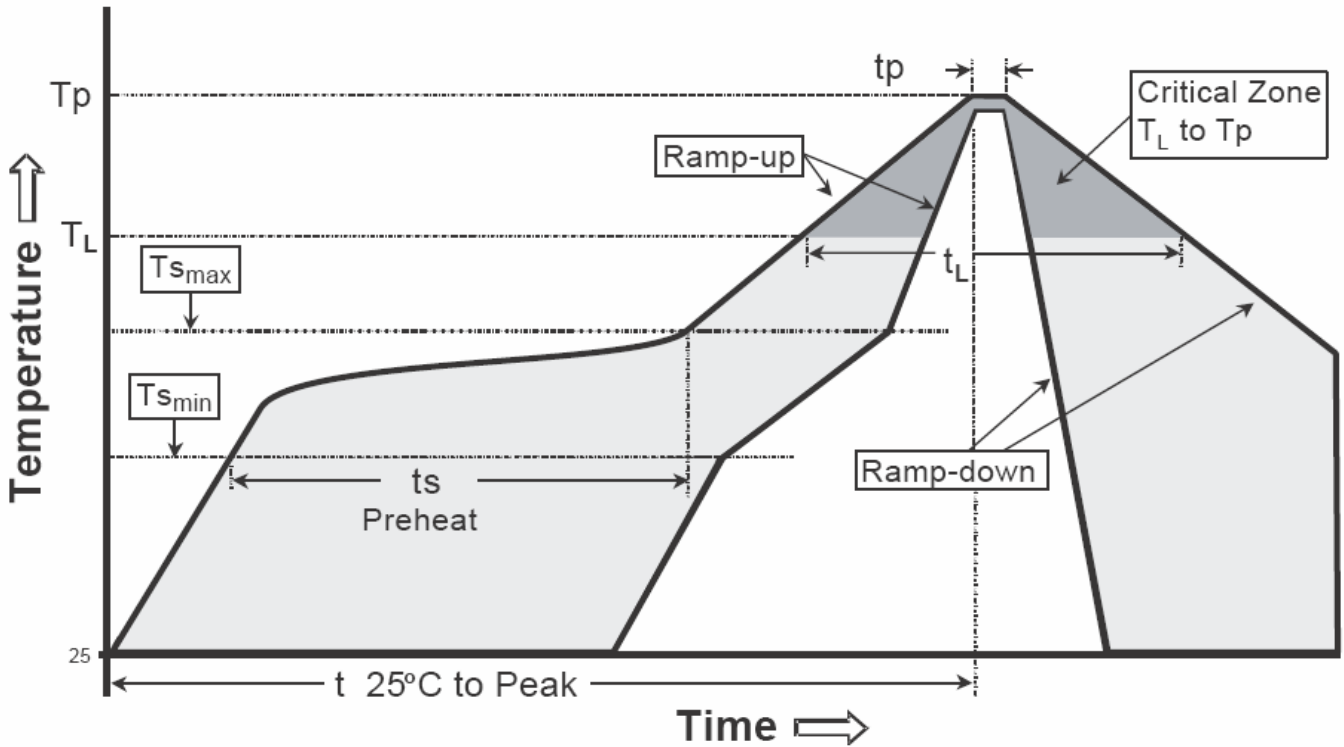

Profile feature	Sn-Pb eutectic Assembly	Pb-free Assembly
Average ramp-up rate (T <sub>smax</sub> to T <sub>p</sub> )	3°C/second max.	3°C/second max.
Preheat		
-Temperature Min(T <sub>s min</sub> )	100°C	150°C
-Temperature Max(T <sub>s max</sub> )	150°C	200°C
-Time(t <sub>s min</sub> to t <sub>s max</sub> )	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T <sub>L</sub> )	183°C	217°C
- Time (t <sub>L</sub> )	60-150 seconds	60-150 seconds
Peak Temperature(T <sub>P</sub> )	240 +0/-5 °C	260 +0/-5 °C
Time within 5°C of actual peak temperature(tp)	10-30 seconds	20-40 seconds
Ramp down rate	6°C/second max.	6°C/second max.
Time 25 °C to peak temperature	6 minutes max.	8 minutes max.

Note : All temperatures refer to topside of the package, measured on the package body surface.

**SOT-523 Dimension**

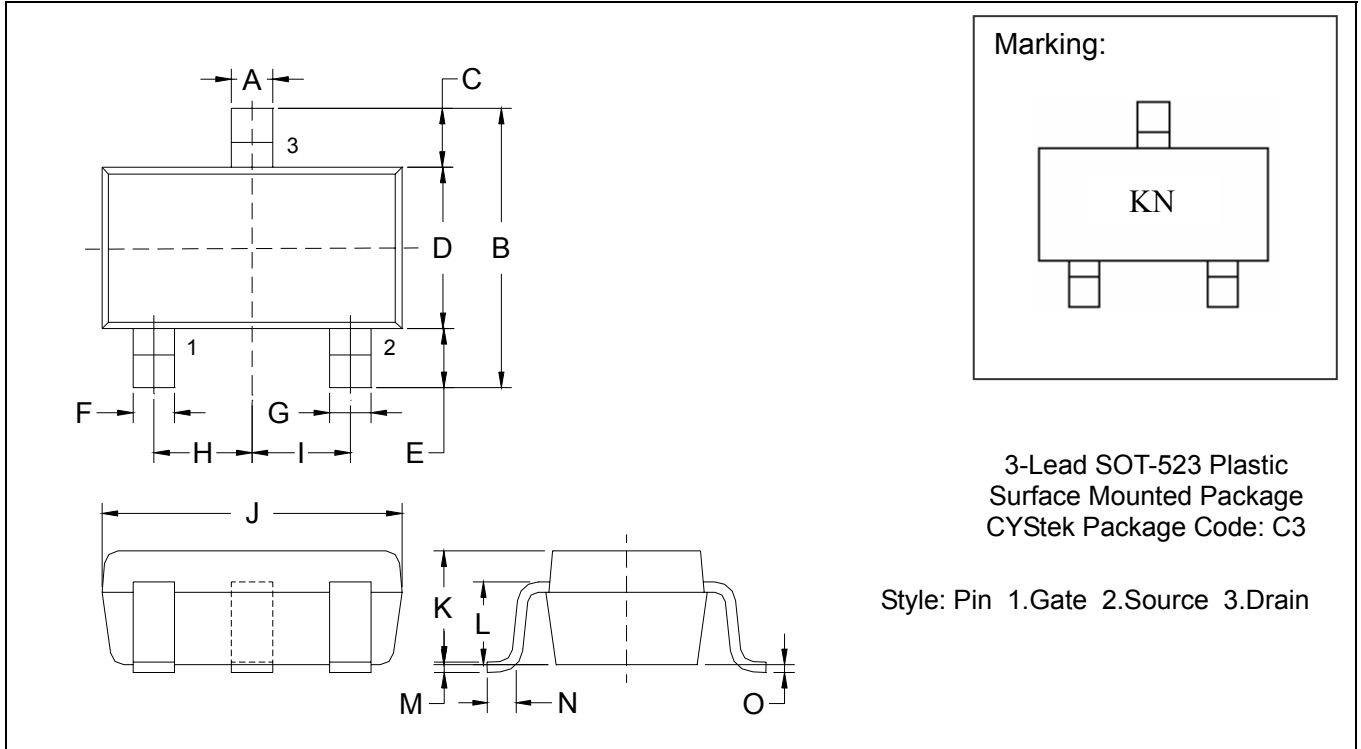

\*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.0079	0.0157	0.20	0.40	I	*0.0197	-	*0.50	-
B	0.0591	0.0669	1.50	1.70	J	0.0610	0.0650	1.55	1.65
C	0.0118	0.0197	0.30	0.50	K	0.0276	0.0315	0.70	0.80
D	0.0295	0.0335	0.75	0.85	L	0.0224	0.0248	0.57	0.63
E	0.0118	0.0197	0.30	0.50	M	0.0020	0.0059	0.05	0.15
F	0.0039	0.0118	0.10	0.30	N	0.0039	0.0118	0.10	0.30
G	0.0039	0.0118	0.10	0.30	O	0	0.0031	0	0.08
H	*0.0197	-	*0.50	-					

Notes: 1.Controlling dimension: millimeters.  
 2.Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.  
 3.If there is any question with packing specification or packing method, please contact your local CYStek sales office.

**Material:**

- Lead: Pure tin plated.
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.