
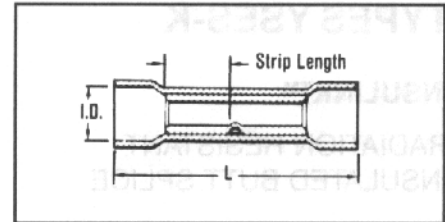


## TYPES SP AND BS

### VINYLINK™

SPLICE,  
POLYVINYLCHLORIDE-  
INSULATED

600 VOLTS, 105° C

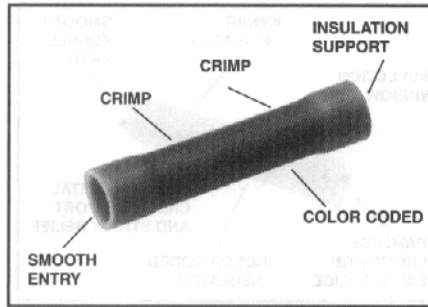

B-46

The type SP VINYLINK™ is a PVC insulated seamless butt splice. Type SP VINYLINK™ is designed to accommodate a broad range of 600 volt cables.



### Features and Benefits

- Manufactured from seamless electrolytic copper tubing.
  - ◇ Provides maximum conductivity and tensile strength, in a high quality design with NO seams to split.
- Funnel entry.
  - ◇ Provides easy wire insertion.
- Electro-tin plated.
  - ◇ Provides durable long lasting resistance to corrosion.
- Expanded insulation support.
  - ◇ Lower inventory requirements.
- Red wire range of 22-16.
  - ◇ Lower inventory requirements.
- Vinyl insulator.
  - ◇ Economical means of providing high dielectric values and cable insulation support.

CATALOG NUMBER	WIRE RANGE	COLOR CODE	BULK CAT. NO.	DIMENSION (INCHES)		INSTALLATION TOOLING	WIRE STRIP LENGTH
				L MAX. INSUL.	MAX. DIA.		
SP16	22-16	Red	BS16	1.00	.145	Non-Ratchet: Y10D-22, Y10D Ratchet: MR8-9-1, MR15	1/4"
SP14	16-14	Blue	BS14	1.00	.180		1/4"
SP10	12-10	Yellow	BS10	1.23	.260		21/64"