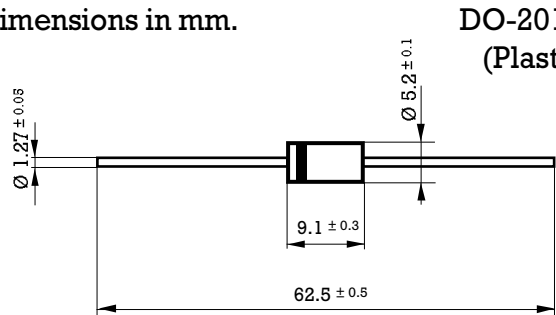



### 3 Amp. Glass Passivated Fast Recovery Rectifier

<p>Dimensions in mm.</p>  <p>DO-201 AD (Plastic)</p>	<p>Voltage 50 to 600 V.</p> <p>Current 3.0 A. at 90 °C.</p> 
<p><b>Mounting instructions</b></p> <ol style="list-style-type: none"> <li>1. Min. distance from body to soldering point, 4 mm.</li> <li>2. Max. solder temperature, 350 °C.</li> <li>3. Max. soldering time, 3.5 sec.</li> <li>4. Do not bend lead at a point closer than 3 mm. to the body.</li> </ol>	<ul style="list-style-type: none"> <li>• Glass passivated junction</li> <li>• High current capability</li> <li>• The plastic material carries U/L recognition 94 V-0</li> <li>• Terminals: Axial Leads</li> <li>• Polarity: Color band denotes cathode</li> </ul>

#### Maximum Ratings, according to IEC publication No. 134


		MR 850 GP	MR 851 GP	MR 852 GP	MR 854 GP	MR 856 GP
$V_{RRM}$	Peak recurrent and non recurrent reverse voltage (V)	50	100	200	400	600
$I_{F(AV)}$	Forward current at $T_{amb} = 90\text{ °C}$	3.0 A				
$I_{FRM}$	Recurrent peak forward current (A)	15 A				
$I_{FSM}$	10 ms. peak forward surge current	100 A				
$t_{rr}$	Max. reverse recovery time from $I_F = 0.5\text{ A}$ $I_R = 1\text{ A}$ $I_{RR} = 0.25\text{ A}$	150 ns				
$T_j$	Operating temperature range	- 65 to + 175 °C				
$T_{stg}$	Storage temperature range	- 65 to + 175 °C				
$E_{RSM}$	Maximum non repetitive peak reverse avalanche energy. $I_R = 1\text{ A}$ ; $T_j = 25\text{ °C}$	20 mJ				

#### Electrical Characteristics at $T_{amb} = 25\text{ °C}$


$V_F$	Max. forward voltage drop at $I_F = 3\text{ A}$	1.25 V
$I_R$	Max. reverse current at $V_{RRM}$ at 25 °C at 125 °C	5 $\mu\text{ A}$ 100 $\mu\text{ A}$
$R_{thj-a}$	Thermal resistance (l = 10 mm.) Max. Typ.	30 °C/W 15 °C/W

### Rating And Characteristic Curves


TYPICAL FORWARD CHARACTERISTIC

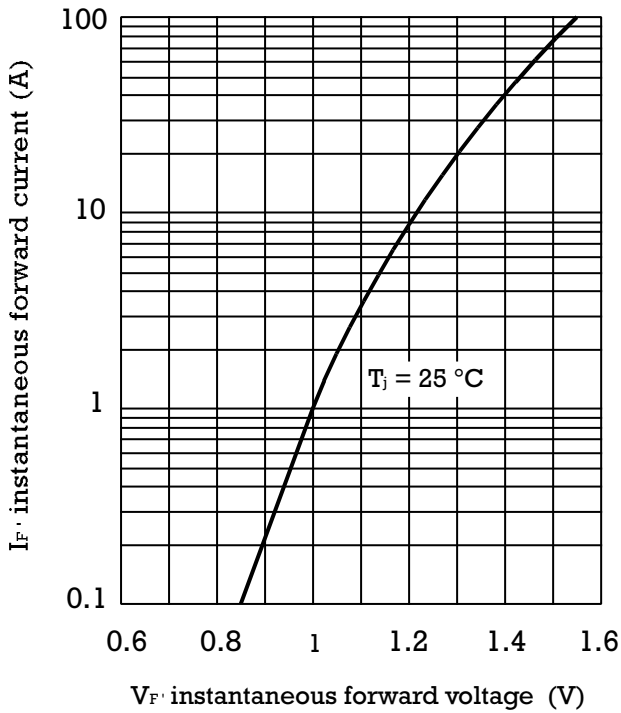

FORWARD CURRENT DERATING CURVE

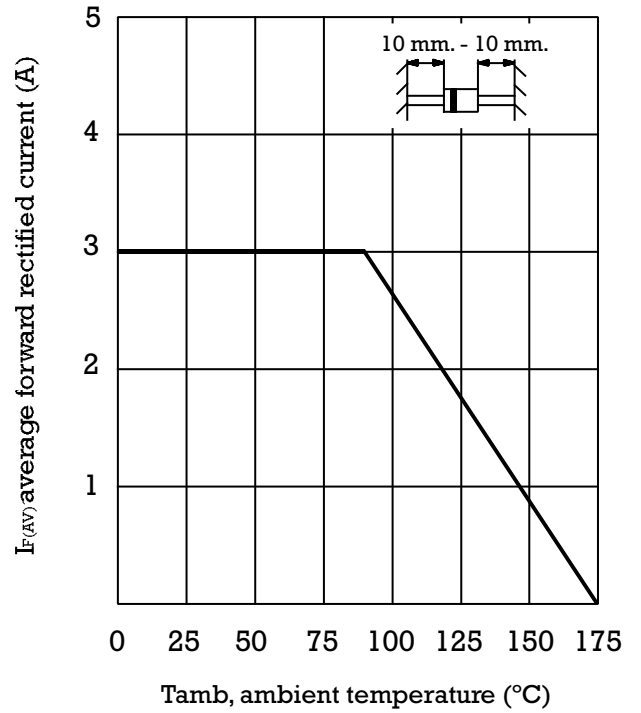

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

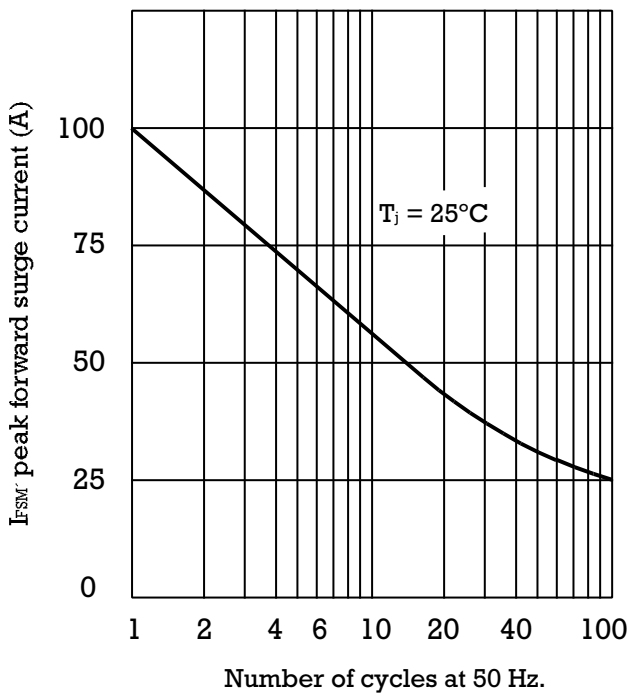

TYPICAL JUNCTION CAPACITANCE

