



REV.	CHANGE CONTENT	BY	DATE

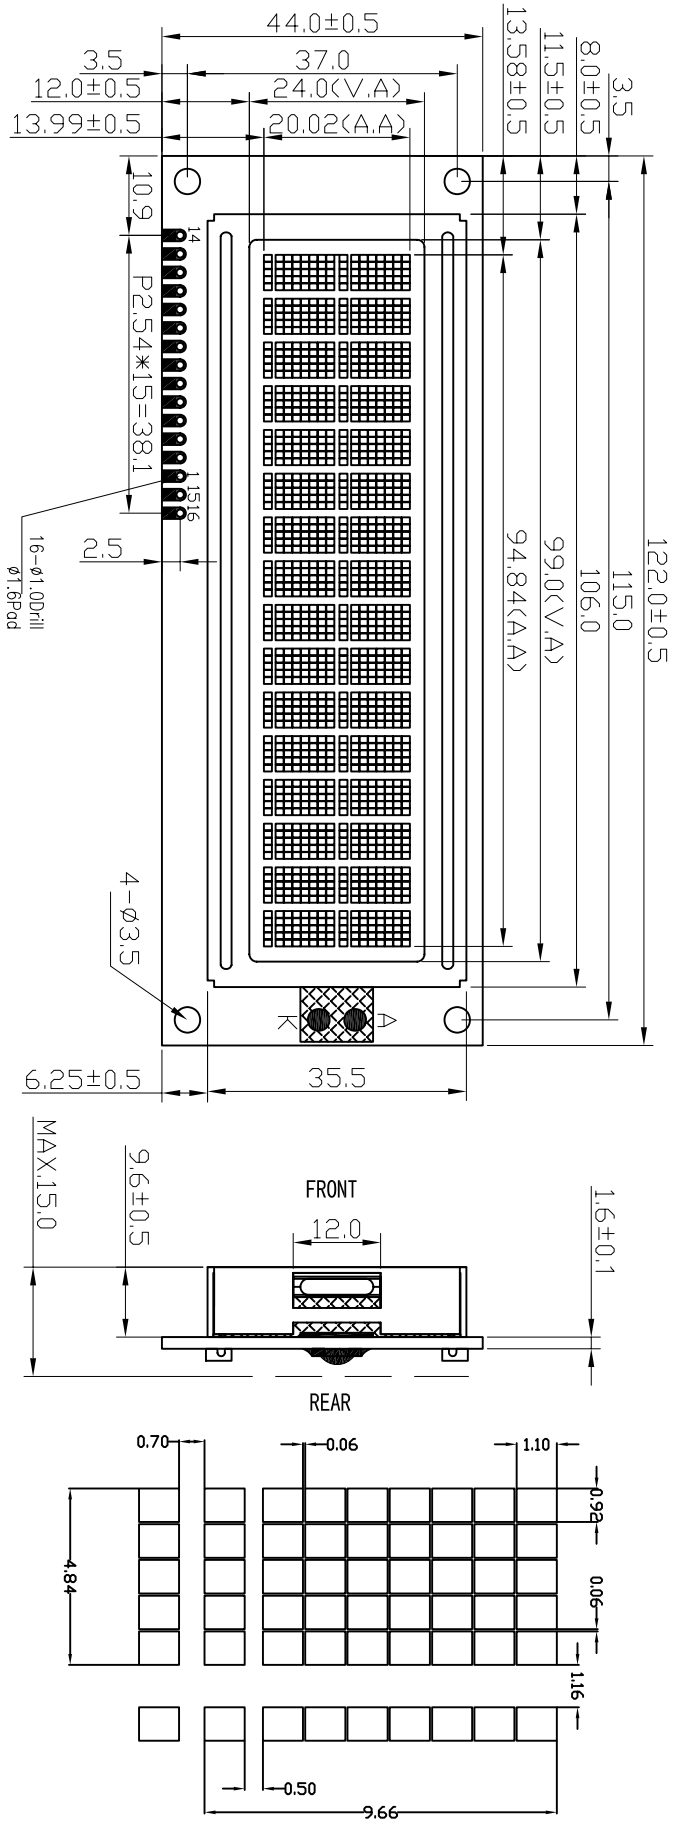

- NOTE:
1. DISPLAY TYPE: STN-Y/G-POSITIVE
 2. DISPLAY MODE: TRANSPARENT
 3. DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, 5V Vop, 5V VDD
 4. VIEWING DIR.: 6:00
 5. OP. TEMP.: -20°C~70°C
 6. ST. TEMP.: -30°C~80°C
 7. BACKLIGHT: COLOR-Y/G, Vop-4.2V, MIN.80 CD/m²
 8. DRIVER IC:S6A0069,S6A0065

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	GND	VDD	V0	RS	R/W	E	DD	D1	D2	D3	D4	D5	D6	D7	NC/LED+	NC/LED-

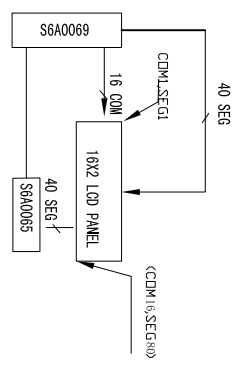

TOLERANCE	>0~6 ±0.10	>6~80 ±0.20	>80~240 ±0.30	>240~400 ±0.50	// L ⊙ ±0.10
DESIGN	ZOUYS	050927	STANDARD	TECHNOLOGY	Q.A
CHECKED					
APPROVED					

HTDISPLAY CO., LTD.

DRAWING NO.: HCl60203C-YF62L-VA
 DRAWING TITLE: LCM DRAWING
 FILE NO.: 8
 REV.: A
 PROJECTION: UNIT: mm
 SCALE: -
 SHEET: 1/1