


**UZ2085A**

Preliminary

**LINEAR INTEGRATED CIRCUIT****3A ADJUSTABLE/FIXED LOW DROPOUT LINEAR REGULATOR****■ DESCRIPTION**

The UTC **UZ2085A** series are low dropout three-terminal regulators with 3A output current capability. These devices have been optimized for low voltage applications including VTT bus termination in which transient response and minimum input voltage are critical.

Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal limitation provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.



TO-252

**■ FEATURES**

- \* Fast transient response
- \* Low dropout voltage at up to 3A
- \* Trimmed current limit
- \* On-chip thermal limiting
- \* Ultra low current consumption (0.35mA typ.)
- \* Ultra low Adjustment Current (7µA typ.)
- \* Ultra low minimum Load (0.3mA typ.)
- \* Stable with low ESR ceramic output capacitor (MLCC)

**■ ORDERING INFORMATION**


Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UZ2085AL-xx-TN3-T	UZ2085AG-xx-TN3-T	TO-252	A/G	O	I	Tube
UZ2085AL-xx-TN3-R	UZ2085AG-xx-TN3-R	TO-252	A/G	O	I	Tape Reel

Note: 1. xx: Output Voltage, refer to Marking Information.


2. A: ADJ (for adjustable regulator), G: GND (for fixed regulator), O: V<sub>OUT</sub>, I: V<sub>IN</sub>

UZ2085AL-xx-TN3-T 	(1) T: Tube, R: Tape Reel (2) TN3: TO-252 (3) xx: Refer to Marking Information (4) L: Lead Free, G: Halogen Free
-----------------------	---

## ■ MARKING INFORMATION

PACKAGE	VOLTAGE CODE	MARKING
TO-252	AD:ADJ	 UTC UZ2085A□ Lot Code ←      Voltage Code ←      Date Code → L: Lead Free      G: Halogen Free 1      2      3

## ■ BLOCK DIAGRAM

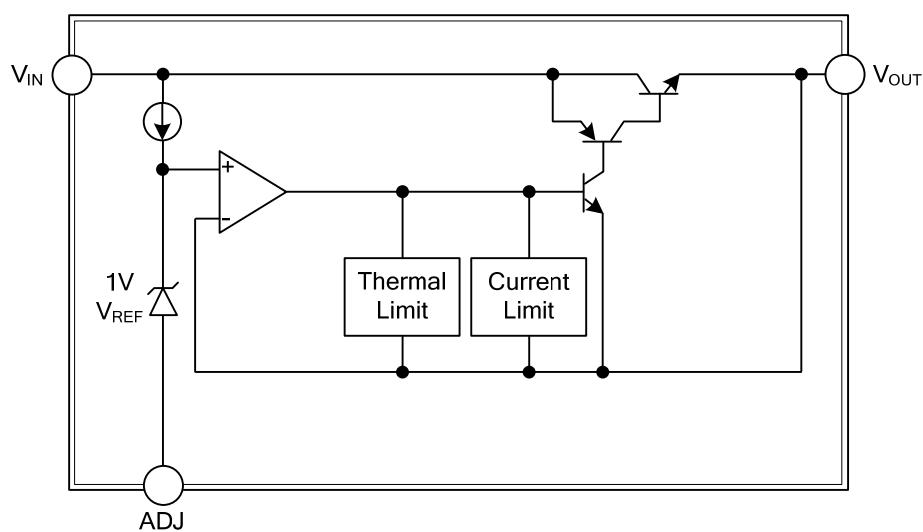

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V <sub>IN</sub>	18	V
Power Dissipation	P <sub>D</sub>	Internally Limited	W
Junction Temperature	T <sub>J</sub>	+150	°C
Operating Temperature	T <sub>OPR</sub>	-20 ~ +85	°C
Storage Temperature	T <sub>STG</sub>	-40 ~ +150	°C

Note:1 Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA


PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ <sub>JA</sub>	118	°C/W
Junction to Case	θ <sub>JC</sub>	12	°C/W

■ ELECTRICAL CHARACTERISTICS (T<sub>A</sub>=25°C, C<sub>OUT</sub>=22μF, unless otherwise specified.)


For UZ2085A-ADJ (Adjustable Voltage)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Reference Voltage	V <sub>REF</sub>	1.5V≤(V <sub>IN</sub> - V <sub>OUT</sub> ) ≤8.25V, 10mA≤I <sub>OUT</sub> ≤3A	0.98	1.0	1.02	V
Line Regulation	ΔV <sub>OUT</sub>	(V <sub>OUT</sub> +1.5V)≤V <sub>IN</sub> ≤12V, I <sub>OUT</sub> =10mA		0.005	0.2	%
Load Regulation	ΔV <sub>OUT</sub>	(V <sub>IN</sub> -V <sub>OUT</sub> )=3V, 10mA ≤ I <sub>OUT</sub> ≤3A		0.05	0.5	%
Dropout Voltage	V <sub>D</sub>	ΔV <sub>REF</sub> %=1%, I <sub>OUT</sub> =3A		1.2	1.40	V
Current Limit	I <sub>LIMIT</sub>	(V <sub>IN</sub> -V <sub>OUT</sub> )=2V	3.1	5.8		A
Adjust Pin Current	I <sub>ADJ</sub>			7	10	μA
Adjust Pin Current Change	ΔI <sub>ADJ</sub>	(V <sub>OUT</sub> +1.5V)≤V <sub>IN</sub> ≤12V, 10mA ≤ I <sub>OUT</sub> ≤3A		0.3	2	μA
Minimum Load Current	I <sub>O(MIN)</sub>	(V <sub>OUT</sub> +1.5V) ≤ V <sub>IN</sub> ≤ 12V		0.3	1	mA
Ripple Rejection	RR	f=120Hz,Tantalum,(V <sub>IN</sub> -V <sub>OUT</sub> )=3V I <sub>OUT</sub> =3A		45		dB
Thermal Regulation		T <sub>A</sub> =25°C,30ms pulse		0.004	0.02	%/W
Temperature Stability	ΔV <sub>OUT</sub>			0.5		%
Long-Term Stability	ΔV <sub>OUT</sub>	T <sub>A</sub> =125°C, 1000hr		0.03	1.0	%
Output Noise(% of V <sub>OUT</sub> )	e <sub>N</sub>	T <sub>A</sub> =25°C,10Hz ≤ f ≤10kHz		0.003		%
Thermal Shutdown				150		°C


## ■ TYPICAL APPLICATION CIRCUIT

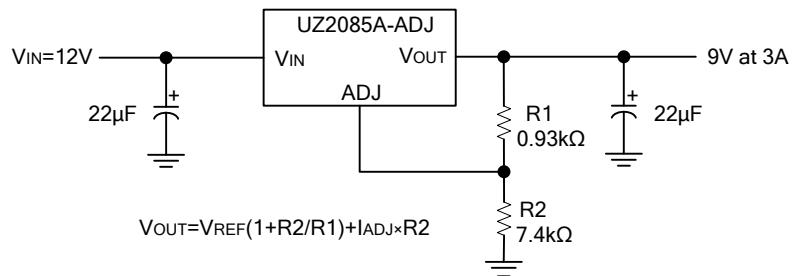

The UTC **UZ2085A** also supports MLCC.

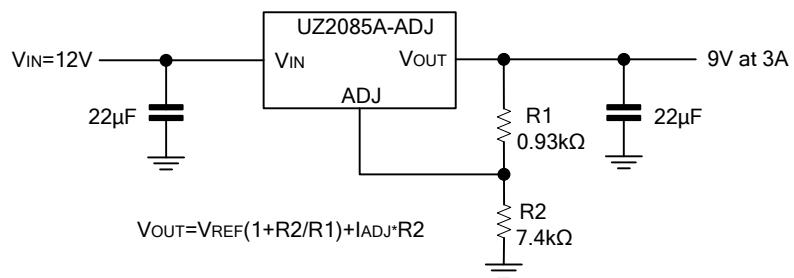

- TYPICAL CHARACTERISTICS

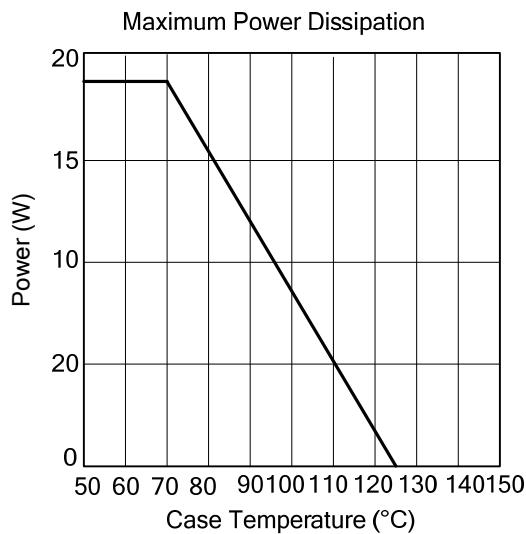

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.