





- ▼ Simple Drive Requirement
- ▼ Lower Gate Charge
- ▼ Fast Switching Characteristic
- ▼ RoHS Compliant & Halogen-Free

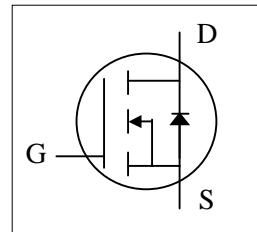

BV_{DSS}	150V
$R_{DS(ON)}$	100m Ω
I_D	20.5A

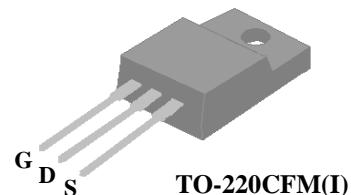

TO-220CFM(I)

Description

AP20N15A series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.

The TO-220CFM package is widely preferred for all commercial-industrial through hole applications. The mold compound provides a high isolation voltage capability and low thermal resistance between the tab and the external heat-sink

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	150	V
V_{GS}	Gate-Source Voltage	+20	V
$I_D @ T_C=25^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^3$	20.5	A
$I_D @ T_C=100^\circ C$	Continuous Drain Current, $V_{GS} @ 10V^3$	13	A
I_{DM}	Pulsed Drain Current ¹	80	A
$P_D @ T_C=25^\circ C$	Total Power Dissipation	34.7	W
$P_D @ T_A=25^\circ C$	Total Power Dissipation	1.92	W
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Value	Units
R_{thj-c}	Maximum Thermal Resistance, Junction-case	3.6	°C/W
R_{thj-a}	Maximum Thermal Resistance, Junction-ambient	65	°C/W



Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	150	-	-	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=10\text{A}$	-	-	100	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}, I_{\text{D}}=6\text{A}$	-	-	110	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	1	-	3	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=10\text{V}, I_{\text{D}}=10\text{A}$	-	28	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=120\text{V}, V_{\text{GS}}=0\text{V}$	-	-	25	μA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm 20\text{V}, V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Q_{g}	Total Gate Charge	$I_{\text{D}}=14\text{A}$	-	17.5	28	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=120\text{V}$	-	5	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=4.5\text{V}$	-	9	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DS}}=75\text{V}$	-	8	-	ns
t_{r}	Rise Time	$I_{\text{D}}=14\text{A}$	-	20	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_{\text{G}}=10\Omega$	-	70	-	ns
t_{f}	Fall Time	$V_{\text{GS}}=10\text{V}$	-	55	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	1600	2560	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=25\text{V}$	-	240	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	5	-	pF
R_{g}	Gate Resistance	f=1.0MHz	-	1.2	2.4	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_{\text{S}}=10\text{A}, V_{\text{GS}}=0\text{V}$	-	-	1.3	V
t_{rr}	Reverse Recovery Time	$I_{\text{S}}=14\text{A}, V_{\text{GS}}=0\text{V},$ $dI/dt=100\text{A}/\mu\text{s}$	-	135	-	ns
Q_{rr}	Reverse Recovery Charge		-	740	-	nC

Notes:

- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Ensure that the channel temperature does not exceed 150 °C

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.

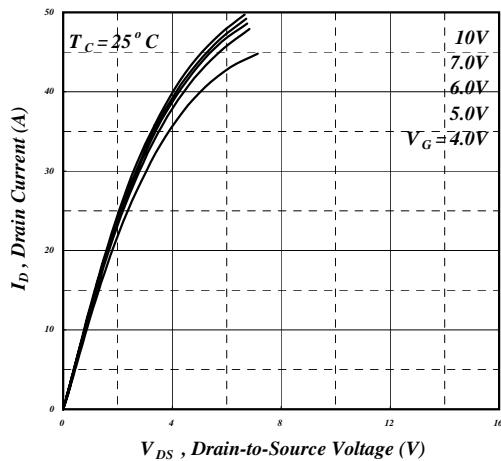


Fig 1. Typical Output Characteristics

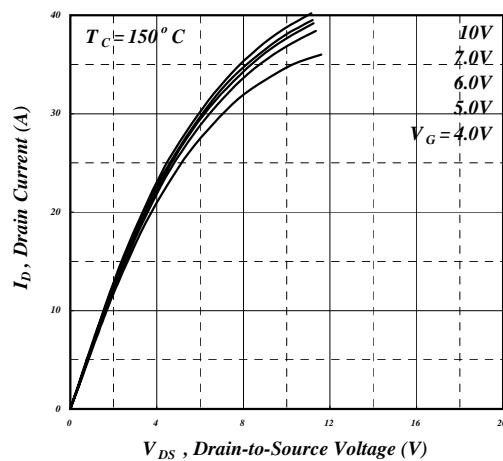


Fig 2. Typical Output Characteristics

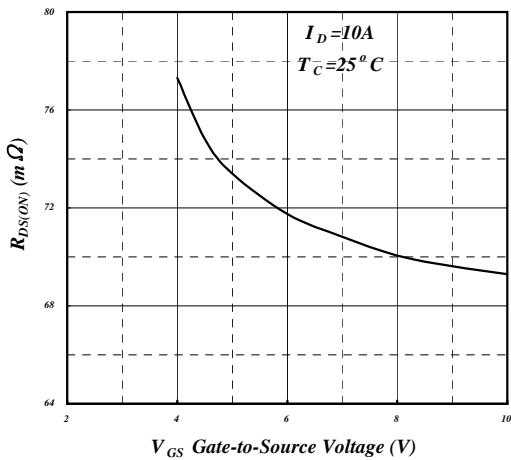


Fig 3. On-Resistance v.s. Gate Voltage

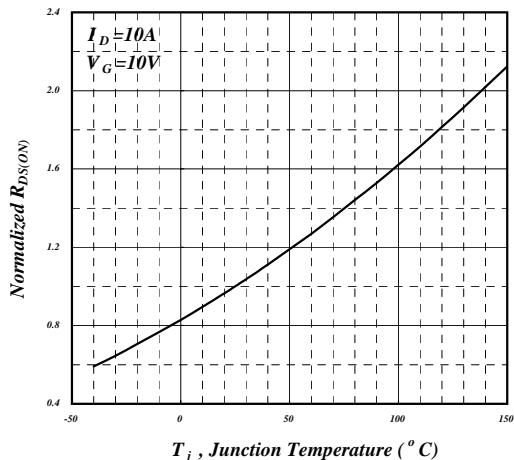


Fig 4. Normalized On-Resistance v.s. Junction Temperature

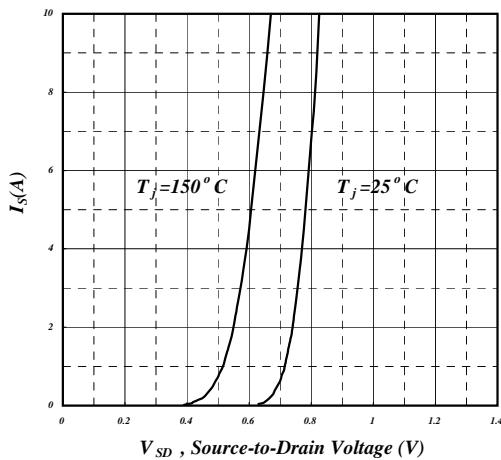


Fig 5. Forward Characteristic of Reverse Diode

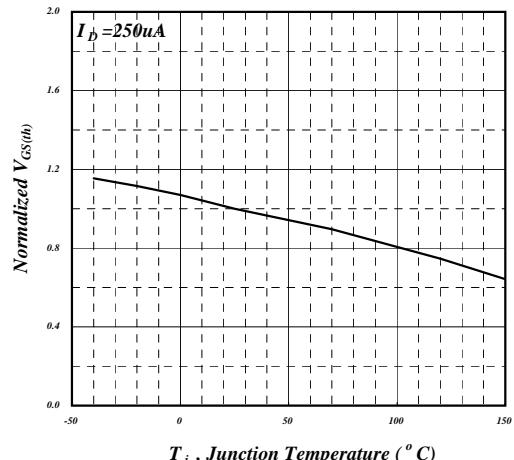


Fig 6. Gate Threshold Voltage v.s. Junction Temperature

AP20N15AGI-HF

