


OFMS SERIES FULL 2X2 OPTICAL FIBER SWITCHES

OFMS Full 2x2

Product Description

Oplink's full 2x2 fiber optic switch offers industrial leading performance. The switch is designed for use in re-configurable optical add/drop multiplexers, optical cross-connect systems, and network switching for fault protection and restoration applications. The switch can be directly mounted on printed circuit board (PCB) and has contacts to provide an electrical readout of the switch state (Cross or Bar). The latching feature ensures the switch remains in current state when electrical power is off.

Oplink provides customized design to meet special control and applications. Also, Oplink offers modular assemblies that integrate other components to form a full function module or subsystem.

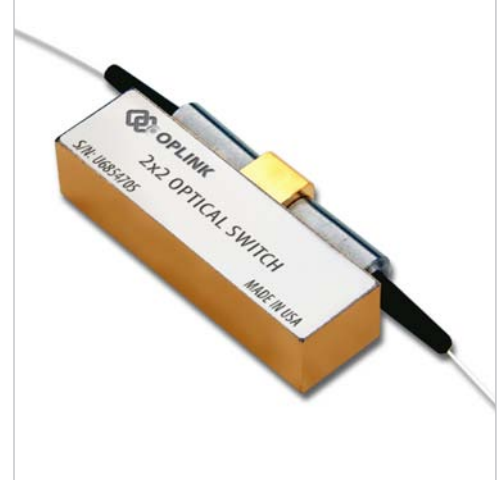

Performance Specification

Parameters	Min	Typ.	Max	Unit	
Operating Wavelength Range (λ_{op})	1260 ~ 1360 and/or 1510 ~ 1610			nm	
Insertion Loss ¹ @ λ_{op} , T_{op} , SOP				1.0	dB
Polarization Dependent Loss				0.1	dB
Return Loss ¹	50			dB	
Channel Cross-talk	60			dB	
Repeatability				±0.05	dB
Switching Speed				10	ms
Operating Current	36	40	44	mA	
Operating Voltage	4.5	5	5.5	VDC	
Durability	10 ⁶			cycle	
Operating Power Handling				500	mW
Operating Temperature (T_{op})	0			65	°C
Storage Temperature	-40			80	°C
Switch Relay Type	Latching or Non-latching				
Fiber Type	Corning SMF-28				
Color Coding	Port 1 = red Port 3 = black Port 2, 4 = clear				
Dimension	P1: 40.64 (L) x 17.7 (W) x 9.4 (H)			mm	

Notes:

1) Insertion loss and return loss: Excludig connectors.


Features

- ◆ Compact Size
- ◆ Low Insertion Loss
- ◆ Seam-seal Package
- ◆ Highly Stable & Reliable
- ◆ Latching or Non-latching Configuration

Applications

- ◆ Network Switching
- ◆ Configurable Add/Drop
- ◆ Network Protection and Restoration
- ◆ Instrument, Testing and Measurement

Function Diagram



Full 2x2 Switch

Ordering Information

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

