
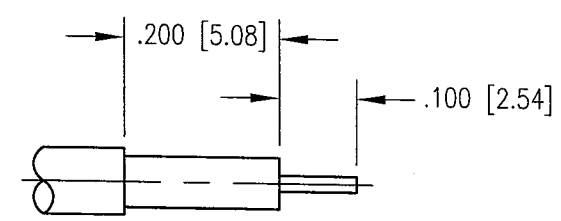


REV	DESCRIPTION	BY DATE	APPD
B	ECR 7246	JMH 2/6/02	[Signature]

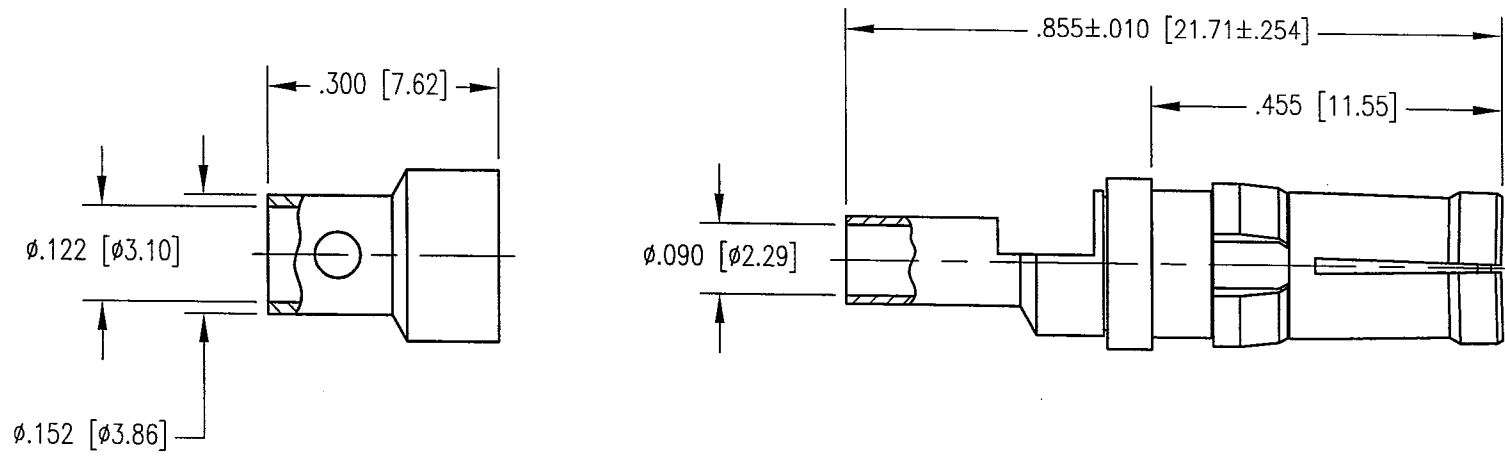

NOTES:

1. MATERIALS:
 FRONT BODY: BERYLLIUM COPPER PER ASTM B196
 CLIP RING: BERYLLIUM COPPER PER ASTM B194
 INSULATOR: TEFLON PER ASTM D1710
 ALL OTHER METAL PARTS: BRASS PER ASTM B16
2. FINISH:
 CLIP RING: .000100 MIN. NICKEL PER QQ-N-290
 OVER COPPER FLASH
 FERRULE: .000005 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 ALL OTHER METAL PARTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
3. ELECTRICAL:
 IMPEDANCE: 50 OHMS NOMINAL
4. FOR USE WITH .085 DIA. SEMI-RIGID CABLE OR EQUIVALENT.
5. FOR CABLING PROCEDURE USE CAP 5-09 WITH TRIMMING DIMENSIONS SHOWN.

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM]		NORTHROP GRUMMAN	
TOLERANCES: DECIMALS .xx ± .01 [0.254] .xxx ± .005 [0.127] ANGLES ± 2°		Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE RDM STRAIGHT RECEPTACLE	
DRAWN JED	DATE 6/7/99	CHECKED TLB	DATE 6/7/99
APPROVED JMC	DATE 6/7/99	APPROVED JMC	DATE 6/7/99
A		211-510-0850G	SHT. 1 OF 1 REV. B