

**GTL-5280**

44 GE + 4 GE Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch

**GTP-2880**

20 GE PoE-Plus + 4 GE PoE-Plus Combo SFP + 4 10GE SFP-Plus L2-Plus Managed Switch, 185W

Specifications

System Specifications

Connectors and Cabling:

Duplex LC Connector, Single-mode fiber(SMF)

Wavelength(nm):

1550nm EML Laser Diode

Transmit Power:

-4.7 ~ +4 dBm

Power Budget:

11.1 dB

Power:

Supply Voltage: 3.3V

Max Voltage/Current: 3.6V/500mA

Standards & Protocols:

IEEE 802.3ae 10GBASE

SFP+ Multi-Sourcing Agreement(MSA)

Receive Sensitivity(dBm):

-15.8 dBm

Features

General:

Hot-swappable

Performance

Data Transfer Rate:

10Gbps Bi-directional data link

Operating Distance:

up to 40km (9/125?m)

Fiber channel up to 10.518Gbps

Environment

Temperature (°C):

Operating: 0°C ~ 70°C

Storage: -40 ~ 85°C

Humidity (Non-condensing):

5 ~ 95%

Physical Specifications

Dimensions (W x D x H mm):

13.7 x 56.5 x 8.95 mm

Weight (g):

20g


Others

Approval and Compliance:

Class 1 eye safety and comply with EN 60825-1

CE, FCC, RoHS

Diagram

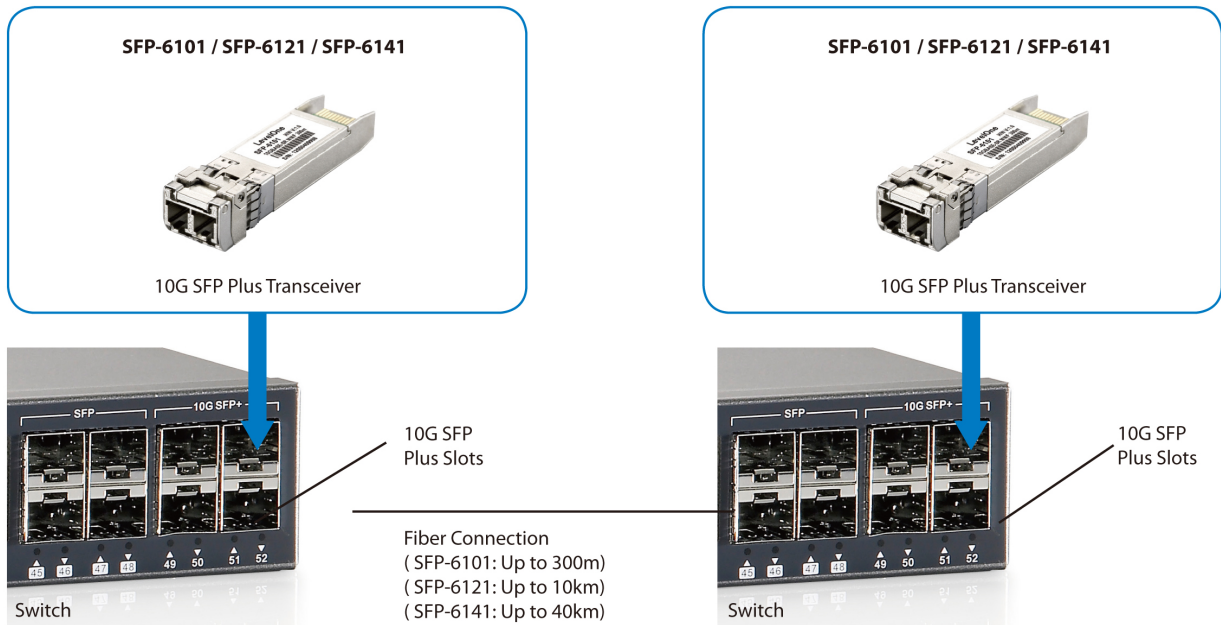

Order Information

SFP-6141



All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.